


ANTICO HD PORCELAIN TILE

PACKAGING INFORMATION

DESCRIPTION	LBS/BOX	PCS/BOX	SQFT/BOX	BOXES/SKID	SQFT/SKID
18" x 18" ANTICO HD PORCELAIN TILE	62.80	7	15.28	26	397.28
12" x 24" ANTICO HD PORCELAIN TILE	64.71	8	16	32	512
12" x 12" ANTICO HD PORCELAIN TILE	43.80	13	13	46	598
6" x 6" ANTICO HD PORCELAIN TILE	32.96	40	10	68	680
2" x 2" ANTICO HD PORCELAIN MOSAICS	31.90	10	10	48	480
2" x 6" ANTICO HD PORCELAIN MOSAICS	31.45	10	10	48	480
3" x 12" ANTICO HD PORCELAIN BULLNOSE	16.48	20	n/a	119	2380 pcs.

GENERAL SPECIFICATIONS

DESCRIPTION	METHOD	UNIT	6" x 6"	12" x 12"	12" x 24"	18" x 18"
THICKNESS		mm – in	7.6 mm – 5/16"	7.6 mm – 5/16"	8.9 mm – 11/32"	8.7 mm – 11/32"
WATER ABSORPTION	EN ISO 10545-3	(%)	≤ 0.5	≤ 0.5	≤ 0.5	≤ 0.5
ABRASION RESISTANCE	EN ISO 10545-7	(PEI)	4	4	4	4
SCRATCH HARDNESS		(Mohs)	9	9	9	9
BREAKING STRENGTH	EN ISO 10545-4	(lbf)	≥ 300	≥ 300	≥ 300	≥ 300
CHEMICAL RESISTANCE	EN ISO 10545-13	(GL)	Class A – Res.	Class A – Res.	Class A – Res.	Class A – Res.
FROST RESISTANCE	EN ISO 10545-12		Resistant	Resistant	Resistant	Resistant
STATIC COEFFICIENT OF FRICTION (WET)	ASTM C-1028	(μ)	≥ 0.70	≥ 0.70	≥ 0.70	≥ 0.70
STATIC COEFFICIENT OF FRICTION (DRY)	ASTM C-1028	(μ)	≥ 0.70	≥ 0.70	≥ 0.70	≥ 0.70
DCOF (WET)	ANSI B101.3		≥ 0.42	≥ 0.42	≥ 0.42	≥ 0.42
SHADE VARIATION			V3	V3	V3	V3

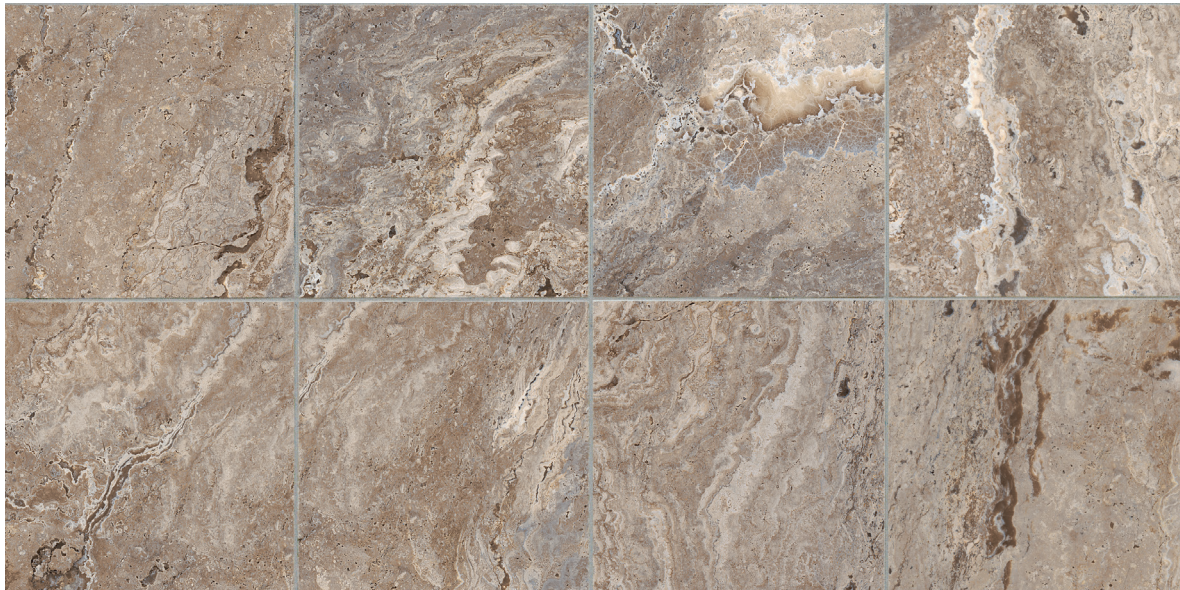

12" x 12" ANTICO WALNUT HD PORCELAIN TILE