

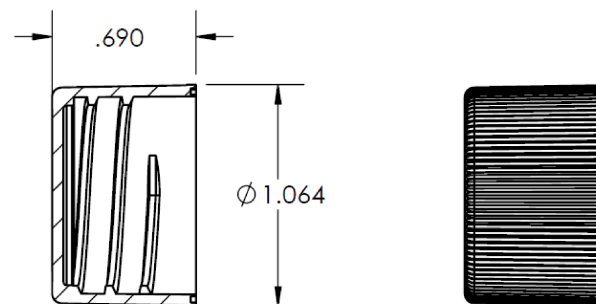





SECTION B-B

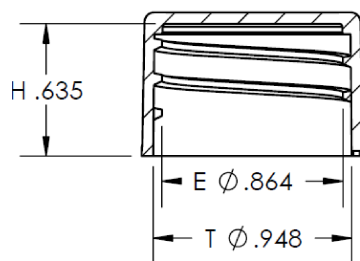

SECTION A-A

8 THREADS PER INCH
.125 LEAD 2 1/2 TURNS



DISCLAIMER

THIS INFORMATION IS PROVIDED AS A GENERAL GUIDE, INCLUDING DIMENSIONS. IT IS THE CUSTOMER'S RESPONSIBILITIES TO SELECT THE PROPER CONTAINER FOR PRODUCT AND APPLICATION COMPATIBILITY.

DISTRIBUTED BY:



REF NO.:

DWG10426

DESCRIPTION:

24-410 PP Matte Top, Ribbed Sides Cap with 035 FS3-25 Heat Seal Liner

FoilSeal™ Data Sheet

.035" Pulp FS3-25

Revision: FS325-01182014

Product	.035" Pulp FS3-25		
Scope	Two piece pulp backed heat induction foil innerseal will provide an aggressive bond with clean peel removal from PET and PVC containers. (.0005" mil foil version of FS3-19). Easy access / "puncture foil" when wax bonded to pulp.		
Composition	Material	Standard	Metric
	Backing	.035"	.889 mm
	Wax	-	-
	Foil	.0005"	.0127mm
	Heat Seal	.0005"	.0127mm

FDA Status:	21 CFR 177.1210	Recommended Storage and Handling:	
Drug Master File (DFM):	#4544	Canadian DMF:	EU / EP Reg.:
GTR Oxygen:	Essentially Zero	MVTR:	Essentially Zero
Print Locatoin (if any):	Foil Layer and/or Heat Seal Layer		

Selig materials are compliant with current USFDA Food allergen Guidelines.
Selig materials are compliant with California Proposition 65 labeling requirements.
Selig materials are compliant with limitation of heavy metals in packaging per CONEG & EU 94/62/EC, article 11.

MSDS's are not required as Selig is not a chemical manufacturer or distributor and our products are 'articles' intended for food packaging per 29 CFR 1910.1200 (HazCom).

DISCLAIMER

THIS INFORMATION IS PROVIDED AS A GENERAL GUIDE, INCLUDING DIMENSIONS. IT IS THE CUSTOMER'S RESPONSIBILITIES TO SELECT THE PROPER CONTAINER FOR PRODUCT AND APPLICATION COMPATIBILITY.

DISTRIBUTED BY:



REF NO.:

DWG10426

DESCRIPTION:

24-410 PP Matte Top, Ribbed Sides Cap with 035 FS3-25 Heat Seal Liner