


ASSEMBLY INSTRUCTION

ROUND TABLE

A Top




1 PC

D Flat Washer
5/16"x3/4"



8 PCS

B Base



1 PC

E Spring Washer
5/16"



8 PCS

C Screw
5/16"x1-1/2"




8 PCS

F Allen Wrench
5/16"



1 PC

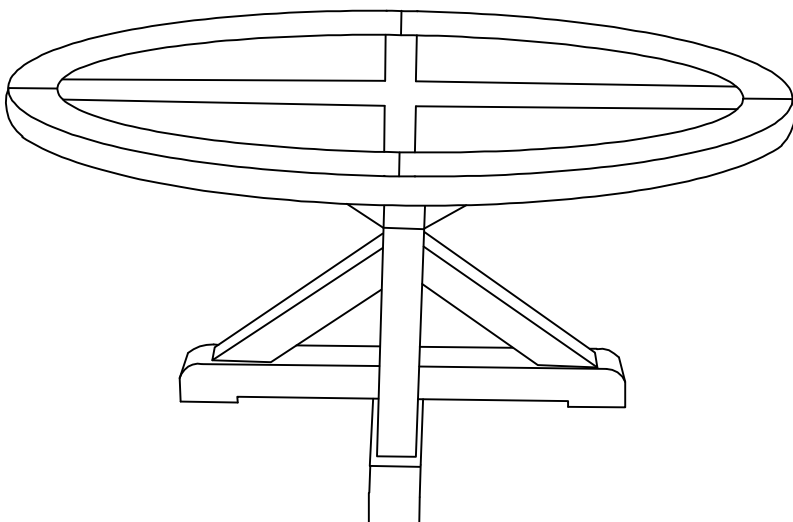


This page lists all the contents included in the box.

Please take the time to identify the hardware as well as the individual components to this product.

As you unpack and prepare for assembly, place the contents on a carpeted or padded area to protect them from damage.

*** Do not tighten screws & bolts until the entire unit is completely assembled.

- 1** Attach Base(B) to Top(A) by using Screw(C), Flat Washer(D), Spring Washer(E) and Allen Wrench(F) as shown.

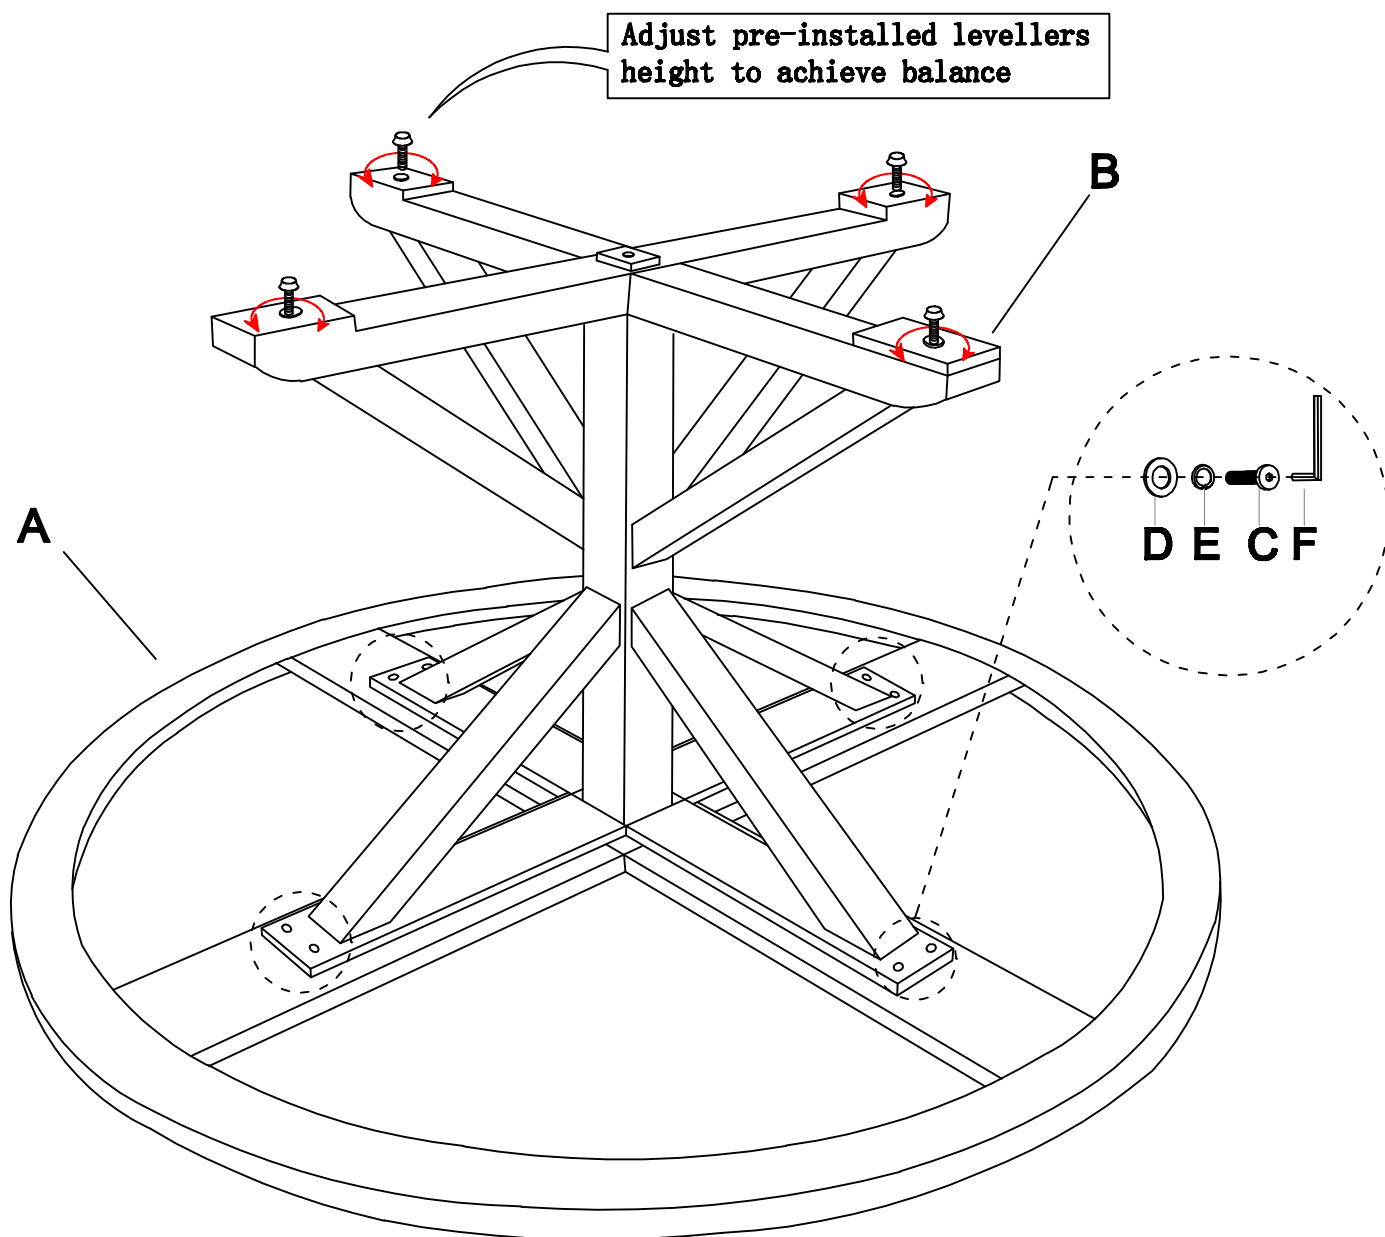

Cleaning & Care

Treat surface with care. Surface is resistant to scratches but is not scratch resistant. Clean surfaces with a dry or damp soft cloth. Do not use abrasive cleaners. Hardware may loosen over time. Periodically check that all connections are tight.

ASSEMBLY INSTRUCTION

E217(N1) CURVED BACK TUFTED DINING CHAIR


A Chair Body	B Front Leg	C Back Leg	D Lock Washer M8x12mm
---------------------	--------------------	-------------------	---------------------------------



1pc	2pcs	2pcs	8pcs
E Flat Washer M8x22mm	F Bolt M8x50mm	G Bolt M8x40mm	H Allen Key M5




8pcs	4pcs	4pcs	1pc
------	------	------	-----

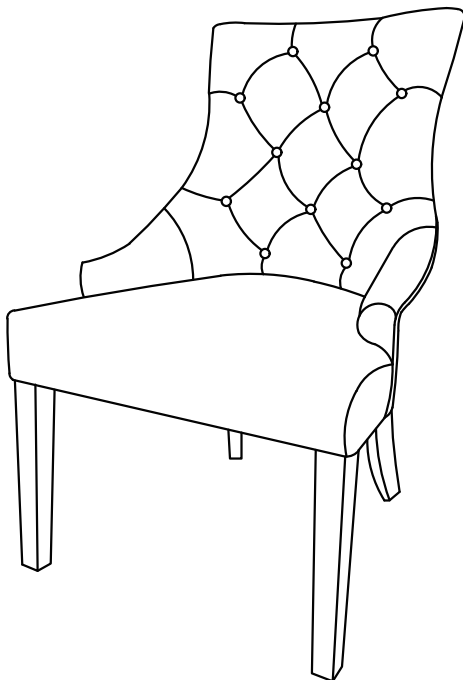


This page lists all the contents included in the box. Please take the time to identify the hardware as well as the individual components to this product. As you unpack and prepare for assembly, place the contents on a carpeted or padded area to protect them from damage.

- 1 Attach the Front Leg (B) to Chair Body (A) with Lock Washer (D), Flat Washer (E) and Bolt (F) by Allen Key (H).

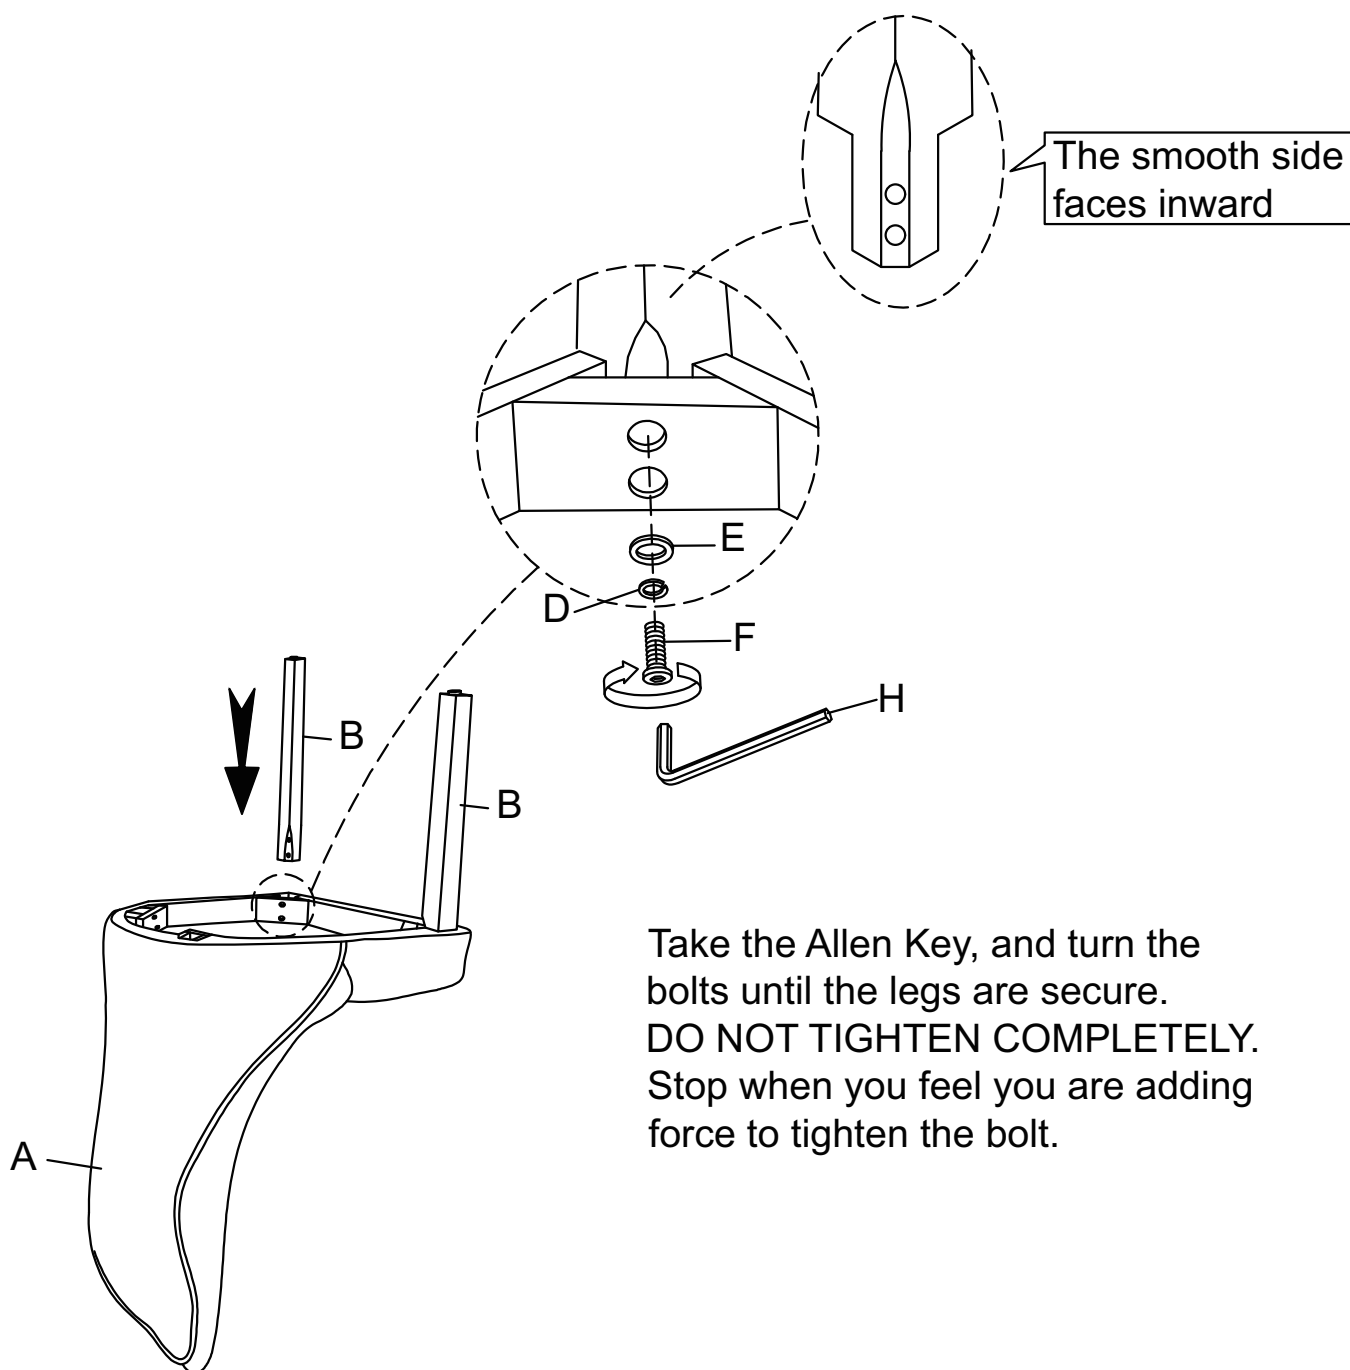

2 Attach the Back Leg (C) to Chair Body (A) with Lock Washer (D), Flat Washer (E) and Bolt (G) by Allen Key (H).

Stand chair up on an even surface and check that it is balanced. If there is a slight wobble, apply downward pressure in the corner where a leg is uneven. Keeping pressure in that corner, tighten all bolts. If balanced, apply downward pressure evenly in the center and tighten all bolts. Do not over-tighten beyond hole depth.

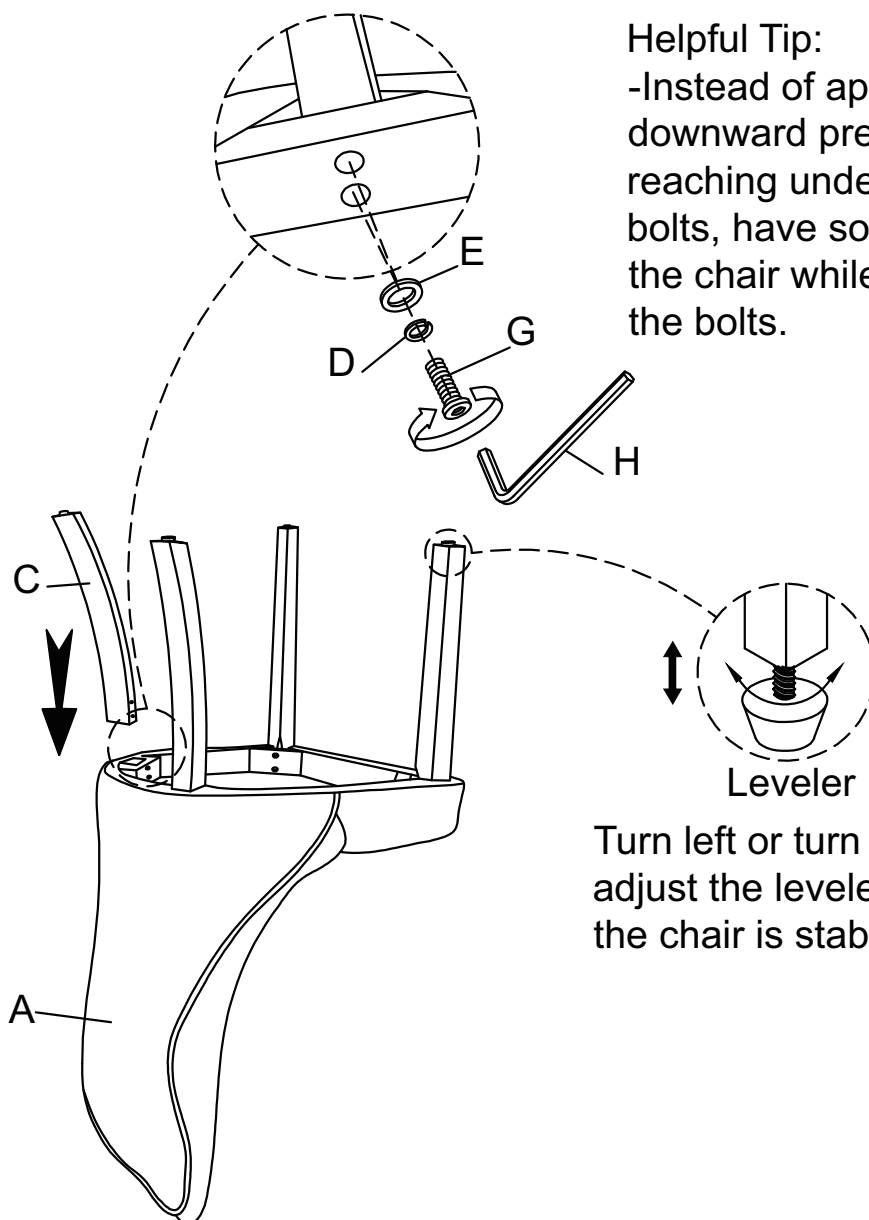

Helpful Tip:

-Instead of applying downward pressure while reaching under to tighten bolts, have someone sit in the chair while you tighten the bolts.

Cleaning & Care

Treat surface with care. Surface is resistant to scratches but is not scratch resistant. Clean surfaces with a dry or damp soft cloth. Do not use abrasive cleaners. Hardware may loosen over time. Periodically check that all connections are tight.