

FREEDM® Loose Tube, Gel-Free Cable, Riser 72 F, Single-mode (OS2)

CORNING

Part Number:
072EUF-T4101D20

Corning FREEDM® loose tube gel-free riser cables are flame-retardant, indoor/outdoor, riser-rated cables designed for interbuilding and intrabuilding backbones in aerial, duct and riser applications. These cables are protected against water penetration by innovative waterblocking materials that swell to absorb water. Waterblocking without the use of messy gels provides more efficient and craft-friendly cable preparation. It also makes cable access easier and simplifies the use of buffer tube fan-out kits. The buffer tubes and fibers in each tube are color coded for quick, easy identification. The SZ-stranded, loose tube design isolates fibers from installation and environmental rigors and allows for easy mid-span access. The cable design is also National Electrical Code® (NEC®) listed (OFNR and FT-4). The all-dielectric cable construction requires no grounding or bonding, and the UV-resistant, flame-retardant jacket is rugged, durable and easy to strip. Note: This cable is available in 12 different jacket colors – blue, orange, green, brown, slate, white, red, black, yellow, violet, rose and aqua. The colored jacket allows for easy visual identification of the cables while still providing all of the required environmental protection of an indoor/outdoor cable jacket. Black is the standard jacket color using the part numbers shown here. Contact Customer Care at 1-800-743-2675 to order other color options.

Features and Benefits

Gel-free waterblocking technology

Craft-friendly cable preparation

Loose tube design

Stable performance and compatibility with all common fiber types

Color-coded tubes and fibers


Quick and easy identification

All-dielectric construction


Requires no grounding or bonding

Common installations

Outdoor lashed aerial and duct

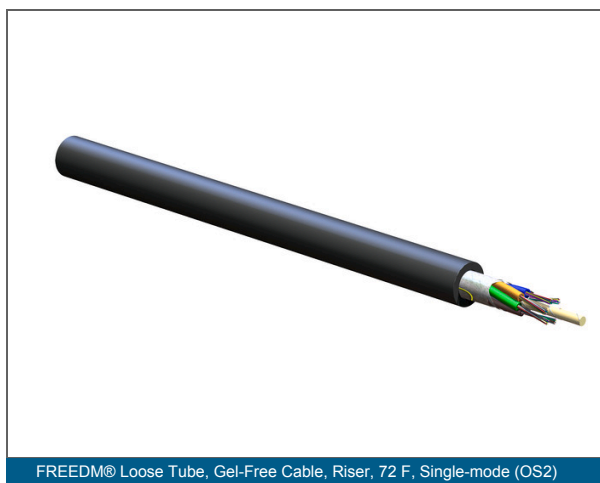

FREEDM® Loose Tube, Gel-Free Cable, Riser, 72 F, Single-mode (OS2)

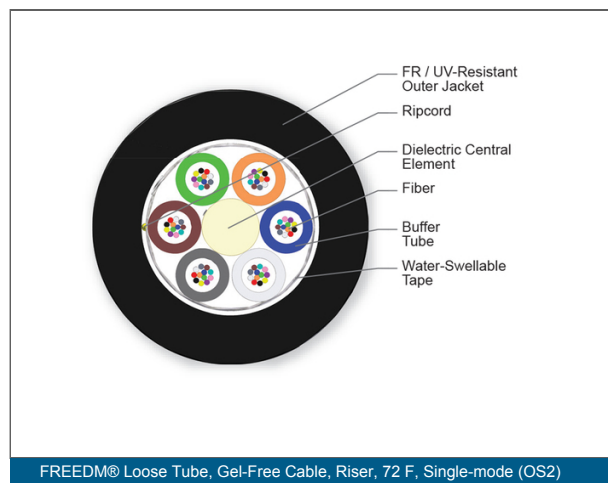

FREEDM® Loose Tube, Gel-Free Cable, Riser, 72 F, Single-mode (OS2)

FREEDM® Loose Tube, Gel-Free Cable, Riser 72 F, Single-mode (OS2)

CORNING

Specifications

General Specifications

Cable Type	Loose Tube
Environment	Indoor/Outdoor
Product Type	Dielectric
Fiber Category	Single-mode (OS2)
Flame Rating	Riser (OFNR)
Application	Aerial, Direct Buried, Duct, General purpose, Horizontal
Cable geometry	Round

Standards

RoHS	Free of hazardous substances according to RoHS 2011/65/EU
Approvals and Listings	National Electrical Code® (NEC®) OFNR, CSA OFN FT-4
Common Installations	Outdoor aerial and duct, indoor vertical riser and general purpose horizontal according to National Electrical Code® (NEC®) Article 770
Design and Test Criteria	ANSI/ICEA S-104-696

Environmental Conditions

Temperature Range, Installation	-10 °C to 60 °C (14 °F to 140 °F)
Temperature Range, Operation	-40 °C to 70 °C (-40 °F to 158 °F)
Temperature Range, Storage	-40 °C to 70 °C (-40 °F to 158 °F)

Cable Design

Central Element	Dielectric
Fiber Count	72
Number of Ripcords	2
Outer Jacket Color	Black
Outer Jacket Material	Flame-Retardant, UV-Resistant

FREEDM® Loose Tube, Gel-Free Cable, Riser 72 F, Single-mode (OS2)

CORNING

Cable Design

Buffer Tube Color	Blue, Orange, Green, Brown, Slate, White
Buffer Tube Diameter	2.5 mm (0.1 in)
Number of Active Tubes	6
Number of Tube Positions	6
Tape	Water-swellable
Fiber Coloring	Blue, Orange, Green, Brown, Slate, White, Red, Black, Yellow, Violet, Rose, Aqua
Fibers per Tube	12
Color Code Standards	Telcordia

Mechanical Specifications

Max. Tensile Strength, Long-Term	810 N (182.1 lbf)
Max. Tensile Strength, Short-Term	2700 N (606.98 lbf)
Min. Bend Radius Installation	195 mm (7.68 in)
Min. Bend Radius Operation	130 mm (5.12 in)
Nominal Outer Diameter	13 mm (0.51 in)

Optical Characteristics

Fiber Code	E
Fiber Name	Single-mode (OS2)
Fiber Type	Single-mode
Performance Option Code	01
Maximum Attenuation	0.4 dB/km / 0.4 dB/km / 0.3 dB/km
Wavelengths	1310 nm / 1383 nm / 1550 nm
Fiber Category	G.652.D

Dimensions

Cable Weight	146 kg/km (98.11 lb/1000 ft)
--------------	------------------------------

FREEDM® Loose Tube, Gel-Free Cable, Riser 72 F, Single-mode (OS2)

CORNING



Corning Optical Communications LLC • 4200 Corning Place • Charlotte, NC • 28216 • United States
800-743-2675 • FAX: 828-325-5060 • International: +1-828-901-5000 • www.corning.com/opcomm