







Location:



SLW361210
Two Handle Widespread Lavatory Faucet
Specification Submittal




Model Numbers	Feature Highlights
<input type="checkbox"/> SLW361210 Two Handle Widespread Lavatory Faucet	<ul style="list-style-type: none"> • 8" to 16" mount configuration • Quarter turn ceramic cartridges • 6-5/8" height • Lift rod and metal drain assembly • Standard 1.0 gpm (3.8 L/min) flow rate • Faucet shall be metal construction, plated in standard polished chrome finish
Finish Options/Modifications	Compliance
<input type="checkbox"/> 05  0.5 gpm (1.9 L/min) flow restrictor <input type="checkbox"/> H2  Alternative lever handle (Chrome and Satin Nickel only) <input type="checkbox"/> H3  Alternative lever handle (Chrome and Satin Nickel only) <input type="checkbox"/> BBZ Brushed Bronze finish <input type="checkbox"/> MB Matte Black finish <input type="checkbox"/> STN Satin Nickel finish Note: Append appropriate suffix to model number.	ASME A112.18.1/CSA B125.1 NSF/ANSI/CAN 61: Q<1, NSF/ANSI 372 WaterSense 1.0 gpm (3.8 L/min)   <hr/> Warranty Limited Lifetime - to the original end purchaser in consumer/residential installations. 10 Years - for commercial/industrial installations. Refer to www.symmons.com/warranty for complete warranty information. 

Architectural/ Engineering Specification



Symmons Duro Two Handle Widespread Lavatory Faucet_____ With 8" to 16" mount configuration, quarter turn ceramic cartridges, 6-5/8" height, Lift rod and metal drain assembly, Standard 1.0 gpm (3.8 L/min) flow rate, Faucet shall be metal construction, plated in standard polished chrome finish, 10 Year commercial Warranty. ASME A112.18.1/CSA B125.1, NSF/ANSI/CAN 61: Q<1, NSF/ANSI 372 , WaterSense 1.0 gpm (3.8 L/min), complaint. Available options include: "0.5 gpm (1.9 L/min) flow restrictor", " Alternative lever handle (Chrome and Satin Nickel only)", " Brushed Bronze finish", " Matte Black finish", " Satin Nickel finish".

SLW361210

Dimensions

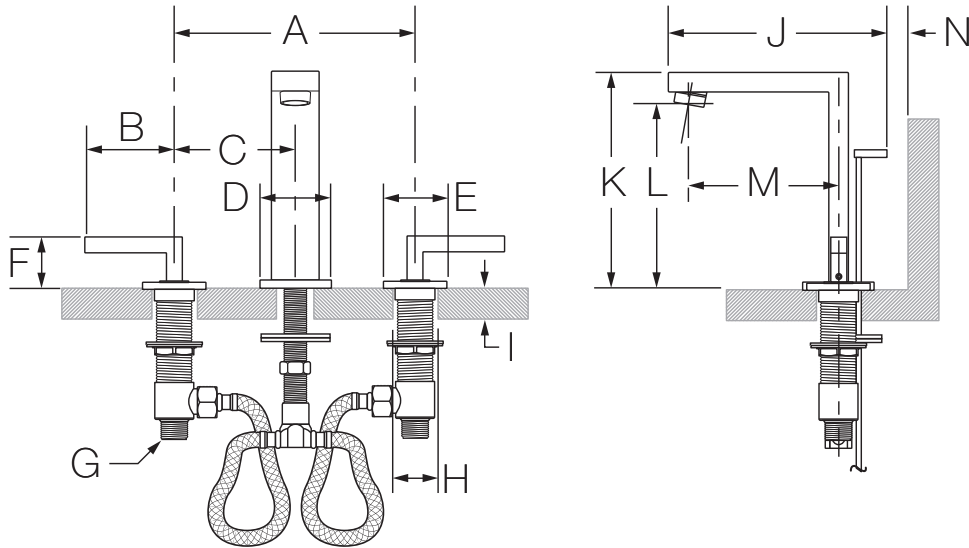

Measurements	
A	Min. 8", 203 mm Max. 16", 406 mm
B	2-3/4", 70 mm
C	4", 102 mm
D	2-1/8", 54 mm
E	2", 51 mm
F	1-5/8", 40 mm
G	1/2-14 NPSM
H	(3x) Hole size Min. Ø 1-1/4", 32 mm Max. Ø 1-3/8", 35 mm
I	Deck Thickness Ref. Min. 7/8", 22 mm Max. 2-3/8", 60 mm
J	6-3/8", 161 mm
K	6-5/8", 170 mm
L	5-5/8", 143 mm
M	4-5/8", 116 mm
N	Min. 1/2", 13 mm
O	1-5/8", 41 mm
P	2-3/4", 70 mm
Q	1-3/4", 44 mm
R	2-5/8", 67 mm

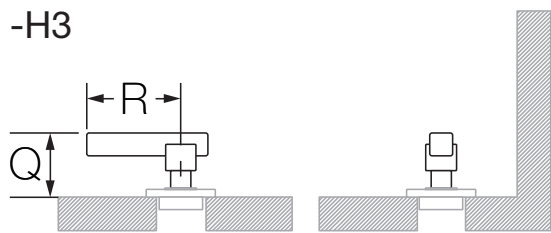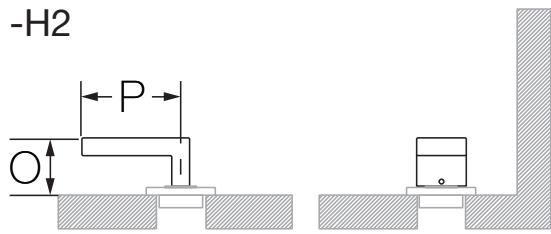

Note: Dimensions subject to change without notice.