

# Incandescent lamps. The enduring solution.




Incandescent lamps represent the original lighting technology, remaining virtually unchanged since their invention in the mid-19th century, and the lighting technology Satco was founded upon.

This is the technology most everyone has become familiar with and the baseline comparison for all other lighting technologies. As the incandescent bulb becomes more and more regulated, Satco remains on the cutting edge of new lighting technologies. Still, we remain well-stocked with incandescent lamps in a multitude of wattages, base sizes, and shapes for every application.


#### Incandescent lamp features:

- High lumen output
- Up to 5,000 hour life
- Virtually every size and style imaginable
- Wattages from 3 to 500 Watts
- Durable vibration and rough service products
- Colored and special application types

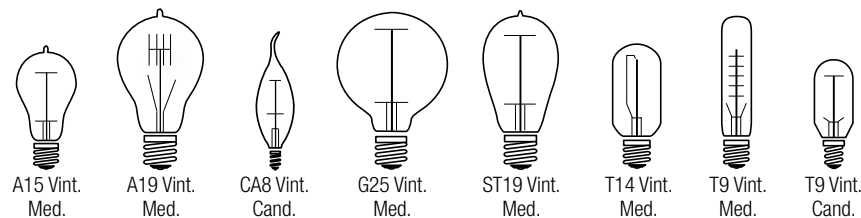

Bulb Type	Watts	Base	Satco Prod. #	Lamp Code	Volts	Finish	M.O.L. Inches	Filament	Initial Lumens	Avg. Rated Hours	Pkg. Type	Master/Inner Carton
<b>A15</b>	40	Med.	<b>S2424</b>	40A15/CL/11S/120V/Vint.	120	Clear	3 5/8	Cage Style	160	3000	Box	50/10
<b>A19</b>	25	Med.	<b>S2411</b>	25A19/CL/120V/Vint.	120	Clear	4 1/2	Quad Loop	100	3000	Box	48/6
	40	Med.	<b>S2412</b>	40A19/CL/120V/Vint.	120	Clear	4 1/2	Quad Loop	160	3000	Box	48/6
	60	Med.	<b>S2419</b>	60A19/CL/120V/Vint.	120	Clear	4 1/2	Quad Loop	240	3000	Box	48/6
<b>CA8</b>	25	Cand.	<b>S2418</b>	25CFC/7S/120V/Vint.	120	Clear	5	Deco Carbon	100	3000	Box	50/10
<b>G25</b>	40	Med.	<b>S2425</b>	40G25/CL/15S/120V/Vint.	120	Clear	4 3/4	Cage Style	160	3000	Box	48/6
<b>ST19</b>	40	Med.	<b>S2413</b>	40ST19/CL/15S/120/Vint.	120	Clear	5 3/16	Cage Style	160	3000	Box	48/6
			<b>S2414</b>	40ST19/CL/9S/120V/Vint.	120	Clear	5 3/16	Hairpin	160	3000	Box	48/6
	60	Med.	<b>S2423</b>	60ST19/CL/15S/120V/Vint.	120	Clear	5 3/16	Cage Style	240	3000	Box	48/6
<b>T14</b>	40	Med.	<b>S2416</b>	40T14/CL/32S/120V/Vint.	120	Clear	4 1/4	Spiral	160	3000	Box	50/10
			<b>S2417</b>	40T14/CL/15S/120V/Vint.	120	Clear	4 1/4	Cage Style	160	3000	Box	50/10
<b>T9</b>	20	Med.	<b>S2415</b>	20T9/CL/120V/Vint.	120	Clear	5 1/2	Hairpin	80	3000	Box	48/6
	40	Cand.	<b>S2420</b>	40T9/GLD/9S/E12/120V/Vint.	120	Clear Gold	3 1/2	Cage Style	160	3000	Box	50/10
		Med.	<b>S2426</b>	40T9/CL/120V/Vint.	120	Clear	5 1/2	Hairpin	160	3000	Box	50/10
	60	Med.	<b>S2421</b>	40T9/CL/12S/120V/Vint.	120	Clear	7 5/16	Hairpin	160	3000	Box	50/10
<b>S2422</b>			60T9/CL/12S/120V/Vint.	120	Clear	7 5/16	Hairpin	240	3000	Box	50/10	

**INCANDESCENT**

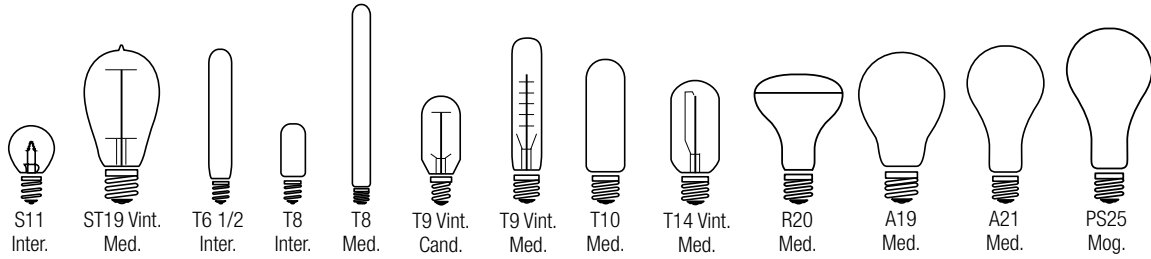

Watts	Bulb Type	Base	Satco Prod. #	Lamp Code	Volts	Finish	M.O.L. Inches	Filament	Initial Lumens	Avg. Rated Hours	Pkg. Type	Master/Inner Carton	Notes	
<b>40</b>	S11	Inter.	<b>S3629</b>	40S11/N	120	Clear	2 3/8	CC-2V	370	1500	Box	600/10		
			<b>S3729</b>	40S11/N	—	Clear	2 3/8	CC-2V	370	1500	CD/1	240/20		
	ST19	Med.	<b>S2413</b>	40ST19/CL/15S/120V/Vint.	120	Clear	5 1/4	Hairpin	160	3000	Box	48/6		
			<b>S2414</b>	40ST19/CL/9S/120V/Vint.	120	Clear	5 1/4	Hairpin	160	3000	Box	48/6		
	T6 1/2	Inter.	<b>S3224</b>	40T6 1/2/N	130	Clear	5 3/8	C-8	350	1500	Box	500/25		
			<b>S3710</b>	40T6 1/2/N	130	Clear	5 3/8	C-8	350	1500	CD/1	120/10		
			<b>S3225</b>	40T6 1/2/N/F	130	Frost	5 3/8	C-8	340	1500	Box	500/25		
			<b>S3712†</b>	40T6 1/2/N/F	130	Frost	5 3/8	C-8	340	1500	CD/1	120/10		
	T8	Inter.	<b>S3917</b>	40T8N	130	Clear	2 5/8	CC-2V	360	2000	CD/1	120/10		
			Med.	<b>S2977</b> ■	40T8	130	Clear	12	C-8	265	2000	Box	10	
	T9	Cand.	<b>S2420</b>	40T9/GOLD/9S/E12/120V/Vint.	120	Clear Gold	3 1/2	Cage Style	160	3000	Box	50/10		
			Med.	<b>S2421</b>	40T9/CL/12S/120V/Vint.	120	Clear	7 5/16	Hairpin	160	3000	Box	50/10	
			<b>S2426</b>	40T9/CL/120V/Vint.	120	Clear	5 1/2	Hairpin	160	3000	Box	50/10		
	T10	Med.	<b>S3252</b>	40T10	120	Clear	5	C-5V	280	2000	Box	500/25		
			<b>S3702</b>	40T10	120	Clear	5	C-5V	280	2000	CD/1	120/10		
			<b>S3253</b>	40T10/F	120	Frost	5	C-5V	280	2000	Box	500/25		
			<b>S3703</b>	40T10/F	120	Frost	5	C-5V	280	2000	CD/1	120/10		
	T14	Med.	<b>S2417</b>	40T14/CL/15S/120V/Vint.	120	Clear	4 5/16	Cage Style	160	3000	Box	50/10		
			<b>S2416</b>	40T14/CL/32S/120V/Vint.	120	Clear	4 5/16	Spiral	160	3000	Box	50/10		
	<b>45</b>	R20	Med.	<b>S3229</b>	45R20	120	Frost	4	CC-9	330	2000	Sleeve	96/12	
<b>S3849</b>				45R20	130	Frost	4	CC-9	330	2000	Sleeve	96/12		
<b>S8519</b>				45R20/5M	130	Frost	4	C-9	280	5000	Sleeve	60/12		
<b>50</b>	A19	Med.	<b>S5011</b>	50A19/F/12V	12	Frost	4 1/8	C-6	540	1500	Box	120/6		
			<b>S5021</b>	50A19/F/34V	34	Frost	4 1/8	C-6	540	1500	Box	120/6		
			<b>S3969†</b>	50A/RS	130	Frost	4 1/8	C-11/5	380	2500	2pk	24		
<b>50/100/150</b>	A21	Med.	<b>S1821</b>	50/150A21/W	120	White	5 5/16	CC-2V/C-9	520/1050/1570	2500	Sleeve	36/12		
			<b>S4823†</b> ■	50/150A21/VLX	120	Full Spectrum	5 5/16	C-9	350/ 910/1260	5000	Box	50/10	3	
<b>50/200/250</b>	PS25	Mog.	<b>S1825</b>	50/150PS25/F	120	Frost	6 3/4	CC-2V/C-9	550/1300/1850	2000	Box	36/12		
<b>50/200/250</b>	A21	Med.	<b>S1823</b>	50/250A21/W	120	White	5 5/16	C-9	640/3300/3940	1500	Sleeve	12		

NOTE: When using a 130 Volt lamp on a 120 Volt line, life is extended approximately 2.5 times and lumens are reduced approximately 20%.