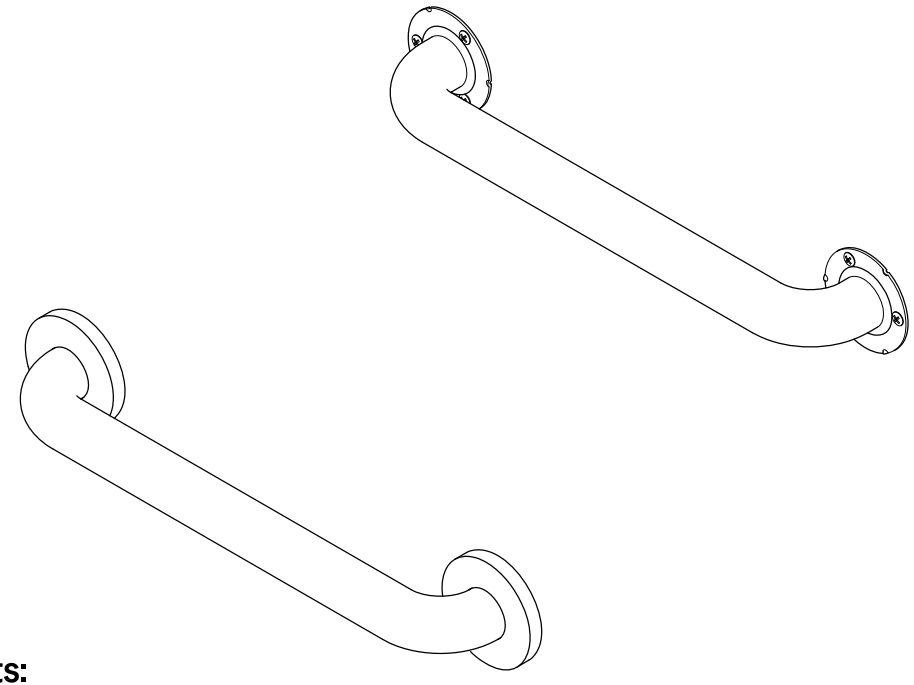

KINGSTON

Grab Bar with or without Cover

Installation Instructions



Parts:

Mounting Screw	
 6 Pcs	

MODEL	FINISH
CS	Stainless Steel, with Cover
CT	Stainless Steel, with Cover, Textured
ES	Stainless Steel, without Cover
ET	Stainless Steel, without Cover, Textured


⚠CAUTION


Failure to follow all installation directions may cause product to detach from the wall and cause serious injury


www.kingstonbrass.com

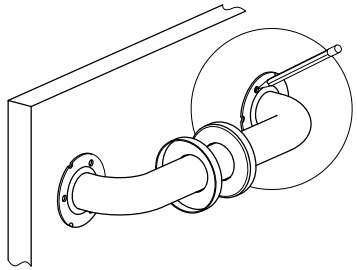
TOLL-FREE CUSTOMER SERVICE: 1-877-2-KBRASS
TECHNICAL SUPPORT E-mail: service@kingstonbrass.com
12775 Reservoir Street, Chino, CA 91710

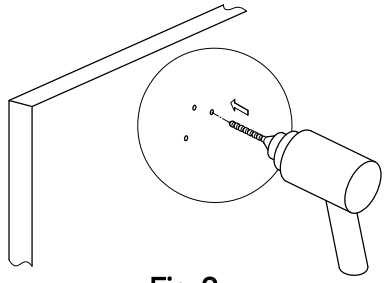
Tools Required

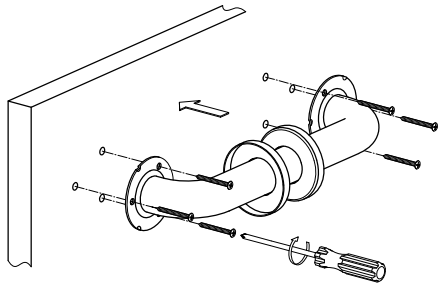

Marking Pencil

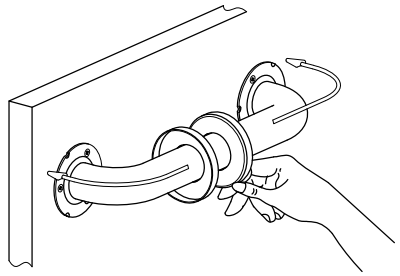

Phillips Screwdriver


Power Drill


Fig. 1


Fig. 2


Fig. 3


Fig. 4

Installation Steps:

1. Locate position on the wall and mark location of the holes.
2. Drill Starter holes (5/64").
3. Mount grab bar to the wall using 2" screws (Enclosed).

This grab bar is designed to be installed on wood bracing. If a proper wood bracing is not available, consult your contractor for the best anchors to use for your specific application. Available options include tile, masonry anchors, toggle bolts, plastic anchors, metal anchors and drywall anchors.

Cleaning

Clean with a damp cloth only.
Avoid using metal or abrasive polishes.

©2025 LVC Kingston LLC. All Rights Reserved.

2025-07-C