

Residential Doors

Kinro



Kinro
BY  LIPPERT
COMPONENTS



Choose your Door

1. PICK YOUR DOOR STYLE



**Series 1600 Vinyl Rolling
Glass Door**
Page 4



**Series 5140
Outswing
Entry Door**
Page 6



**Series 5210
Inswing Combo
Entry Door**
Page 8

2. PICK YOUR DOOR/WINDOW STYLE



3-Panel



6-Panel



3-Panel




2-Light




1-Light


3. PICK YOUR STORM DOOR STYLE



All-Glass



Full-View



Self-Storing

Choose Kinro

More than just a door

When you choose Kinro, you're buying more than just a door. You're getting an attractive gateway to new adventure every morning and a secure, warm welcome home. From the very beginning, Kinro has built sophisticated doors and windows that do more than provide utility — every product detail contributes to the safety, comfort and quality of your home.

All in the details

Quality is hard to define, but when you see it, you know it — and for Kinro, it's all in the details. For many years Kinro has led the way in providing the most excellent steel, aluminum, fiberglass and vinyl doors and windows for homes and other residential applications because we guarantee quality construction, dependable service and innovative features. We are consistently looking to improve our products with meaningful details to enhance your experience every day.

Made in the USA

We are proud to own the design and build of each window line from start to finish, ensuring we consistently bring you premium, American-made products. Every Kinro window product is developed and produced following strict guidelines by our expert engineering and manufacturing teams at our state-of-the-art production facilities across the United States.



**Series 5935
Stormbuster**
Page 10



**Series 6000
Heritage Steel
Entry Door**
Page 12



**Series 7000
Heritage Insulated
Steel Door**
Page 14



**Series 7660
House Type
Steel Door**
Page 16



**Series 8000
Fiberglass
Entry Door**
Page 18



**Series 9000
Heritage II Fiberglass
Entry Door**
Page 20



1-Light



6-Light



9-Light 3-Light



10-Light




15-Light 5-Light



Decorative
Glass Styles

4. PICK YOUR COLOR



White



Clay



Mill



Knob and lock set



Knocker/viewer



Kickplate

1600 Series

The classic, yet extra secure Vinyl Rolling Glass Door combines structural strength, insulated glass and a weather-proof outer seal to prevent air, moisture, dust and noise from getting inside your home. The door's attractive grid lends extra elegance to your home and its color-coordinated steel-reinforced lock provides proven security, making your home a true safe haven. These doors slide easily and were designed to hold up to heavy, consistent use.



Vinyl Rolling Glass Door

Standard Features

- Standard frame compatible with all wall/siding types; lap frame with integral siding pocket eliminates the need for additional siding trim pieces.
- Heat fusion welded frame and moving panel provides superior structural strength and prevents potential leakage.
- Staggered internal weep system allows minimum dust infiltration.
- Snap-in weep covers provide extra protection against the elements.
- IGCC™ certified sealed insulating glass units and optional Low-E coatings provides optimum thermal performance.
- Durable, high quality fin seal weather strip around moving panel perimeter ensures a secure seal.
- Fully-adjustable, factory-lubricated steel tandem rollers mounted with ball bearings ensure trouble-free operation.
- Snap-in door track with a stainless-steel roller guide handles heavy traffic and consistent use.
- Color-coordinated mortise-type keyed lock mounted on a steel-reinforced lock jamb and the anti-lift design adds security.
- Door easily reverses from XO to OX or OX to XO.

1600 Series

AVAILABLE STYLES



CERTIFICATION



Meets or exceeds:
AAMA 1702.2, Wind Zone III
AAMA/WDMA/CSA 101/I.S.2/A440 R-PG40
NFRC Certified

STANDARD SIZES

Call sizes are the same as rough opening sizes. Rough opening must be exact $\pm 1/8"$

Call Size	Call Size	Call Size	Call Size
5' x 6'-4"	5'-6" x 6'-4"	6' x 6'-4"	8' x 6'-4"
5' x 6'-8"	5'-6" x 6'-8"	6' x 6'-8"	8' x 6'-8"

5140 Series

The sleek and fundamental 5140 Outswing Entry Door Series, available with several different window configurations, wasn't just designed to provide an easy in and out of your home, but also to provide timeless proven features you want in a door. A strong aluminum frame, continuous hinge, insulating foam core and other fundamental design details set this series apart.



Outswing Entry Door

Standard Features


- Strong welded aluminum frame with integral weather baffle provides impervious stability.
- Continuous Hinge is easy to operate and handles heavy use.
- Heavy, damage-resistant panels bond securely to the core for structural strength.
- Foam core delivers effective insulation.
- High density foam lock block insures security and durability.
- Four sides of bulb vinyl and extruded flap vinyl form a strong sealing system.
- Meets or exceeds: HUD 3280.405, AAMA 1702.2, Wind Zone III.
- Knob lock set completes the kit.

Options

- Deadbolt lock
- Lock set and deadbolt
- Painted frame


5140 Series

AVAILABLE DOOR STYLES

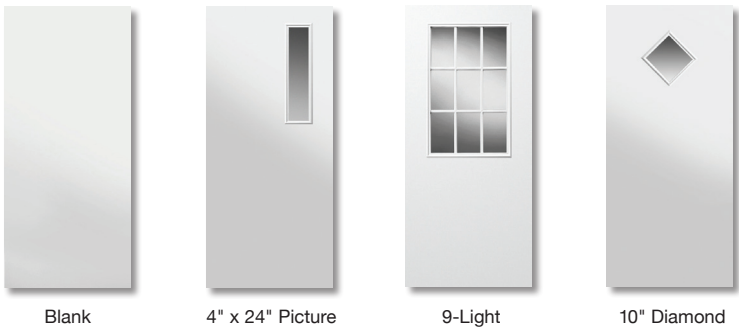

Contact your Kinro representative for the full line of window styles available.

CAMBERED DOOR



STANDARD SIZES

Call sizes are the same as rough opening sizes. Rough opening must be exact $\pm 1/8$ "

Call Size	Call Size	Call Size	Call Size	Call Size
30" x 76"	32" x 72"	34" x 76"	36" x 80"	38" x 82"
30" x 78"	32" x 76"	34" x 80"		
	32" x 78"			

5210 Series

The versatile 5210 Inswing Combination Entry Door Series adds a polished, put-together look to any home. This door series offers various window configuration options and three storm door options, all with timeless styles and quality security features including sturdy insulating foam core, high-density foam lock block and a stainless steel lock system.



Inswing Combination Entry Door

Standard Features

- Heavy, damage-resistant panels bond securely to the core for structural strength.
- Foam core delivers effective insulation.
- High-density foam lock block insures security and durability.
- Precambered galvanized steel frame promotes a tighter seal.
- Core is edge bored and capped for easy addition of deadbolt.
- Residential style butt hinges used to mount inswing core.
- Thermally-broken threshold stands up to heavy foot traffic.
- Prefinished jamb system makes it easy to install.
- Perimeter metal blind stop and integral sealing system adds protection against the elements.
- Double leaf sill sweep blocks moisture penetration.
- Stainless steel lock system with adjustable strike plate reinforces security.
- Self-storing heavy-duty aluminum-framed storm door features stainless steel bushings in hinges.
- Meets or exceeds: HUD 3280.405, AAMA 1702.2, Wind Zone III.

5210 Series

AVAILABLE DOOR STYLES



Blank



4" x 24" Picture




9-Light




10" Diamond

Contact your Kinro representative for the full line of window styles available.

CAMBERED DOOR




AVAILABLE STORM DOOR STYLES



All-Glass



Full-View



Self-Storing

STANDARD SIZES

Call sizes are the same as rough opening sizes. Rough opening must be exact $\pm 1/8"$

Call Size	Call Size
34" x 76"	38" x 80"
34" x 80"	

5600/5900 Series

The welcoming 5600/5900 Stormbuster Full-View Storm Door Series provides added protection against the elements while doubling as an extra full-length window so you family can thoroughly enjoy pleasant weather from inside your home. Its strong safety glass, quality fiberglass screens and heavy-duty hardware make this door a popular, secure and attractive addition to any home.



Stormbuster Full-View Storm Door

Standard Features

- Wide frame on storm leaf profile provides optimal view.
- Lip overrides Z-bar, adding stability (*5900 Series only*).
- Full-length galvanized hinge pin with stainless steel bushings is strong, easy to operate and handles heavy use.
- Safety glass shields door from harsh weather.
- Fiberglass screening allows you to enjoy the breeze and not the bugs.
- Top quality hardware stands the test of time.
- Heavy-duty kick plate adds durability.

5600/5900 Series

AVAILABLE DOOR STYLES



5935 Full-View



5945 Self-Storing



5655 All-Glass



5992 All-Glass

STANDARD SIZES

Call sizes are the same as rough opening sizes. Rough opening must be exact $\pm 1/8"$

Call Size	Call Size	Call Size
32" x 76"	34" x 76"	38" x 76"
34" x 80"	34" x 80"	38" x 80"
		38" x 82"

STANDARD FEATURES

	1" FLUSH MOUNT			1" LAP MOUNT			1" STORM BUSTER			1-1/4" STORM BUSTER		
Model	All-Glass	Full-View	Self-Storing	All-Glass	Full-View	Self-Storing	All-Glass	Full-View	Self-Storing	All-Glass	Full-View	Self-Storing
5635		•			•						•	
5645			•			•						•
5655	•			•						•		
5672								•				
5682									•			
5692							•					
5972											•	
5982												•
5992										•		
Colors	White, Mill, Clay			White, Mill			White, Clay			White		

6000 Series

The sturdy, yet ageless appeal of the 6000 Heritage Steel Entry Door Series features optimum strength and security. With several beautiful style combinations, window configurations, and a long list of quality standard features and attractive options, this series has a door set-up to match your unique needs and perfectly outfit every entrance to your home.



Heritage Steel Entry Door

Standard Features


- Jamb and brickmold system included.
- Heavy-duty galvanized steel core provides strength and stability.
- Therally-broken and adjustable threshold stands up to heavy foot traffic.
- Foam-filled compression seals protect against the elements.
- Combination bulb and three fin sweep add weather resistance.
- Heavy-duty butt hinges are easy to operate and handle heavy use.
- Knob/knob lock set completes the kit.

Options

- Deadbolt lock
- Knock/viewer
- Kick plate
- Jamb sets for 6-1/2" and 4-1/2" wall depth
- Side light combinations
- Swing patio style option
- Full-view or all-glass storm door
- 5900 Series Stormbuster storm door
- White or clay core
- Dura no-rot jamb


6000 Series

AVAILABLE DOOR STYLES

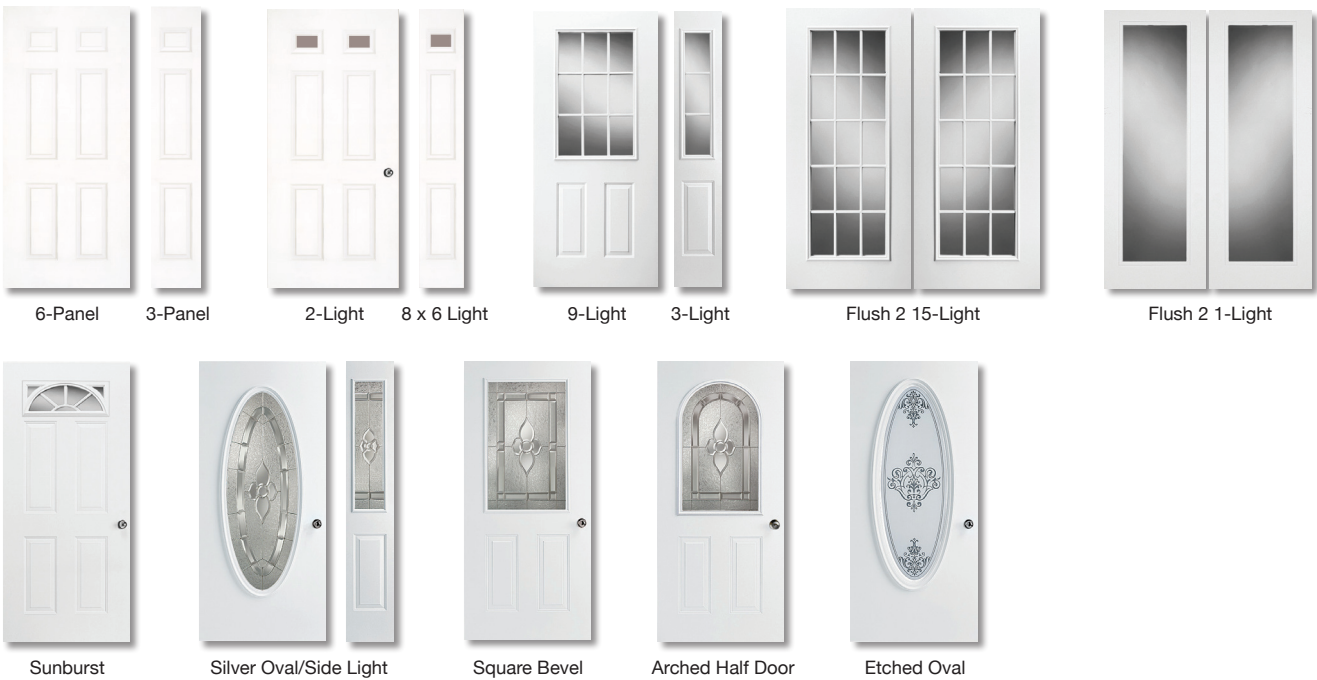

Contact your Kinro representative for the full line of window styles available.

AVAILABLE STORM DOOR STYLES

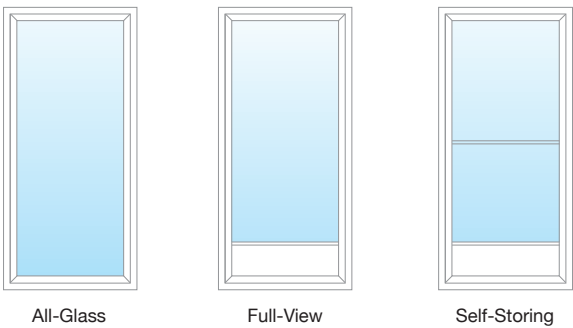

TEST DATA & APPROVALS

- Certified Sealed Insulating Glass Units for optimal thermal performance (dual glazed doorlites only)
- Designed and tested to meet the requirements of the IRC, the IECC, the HUD Manufactured Housing Standards, and the National Building Code of Canada
- AAMA Certified to AAMA/WDMA/CSA 101/I.S.2/A440 and/or AAMA 1702.2 (Consult Kinro Sales for specific ratings by model)
- NFRC Certified Thermal Performance Ratings (Consult Kinro Sales for specific ratings by model and selected doorlite)

STANDARD SIZES

Call sizes are the same as rough opening sizes. Rough opening must be exact $\pm 1/8"$

	Door Size	Rough Opening	Side Lite	Double Lite
SINGLE DOOR	34" x 82"	34" x 82"		
	38" x 82"	38" x 82"	53" x 82"	68" x 82"
PATIO SWING DOOR	75" x 82"	75" x 82"	n/a	n/a

7000 Series

The tough 7000 Heritage Insulated Steel Entry Door Series is built strong to withstand consistent use and to protect your home from harsh weather. This versatile and attractive line features a thermally-broken threshold and four-legged dual durometer door sweep to provide substantial weather and temperature resistance. The 25-gauge steel door comes complete with our patented aluminum clad jamb system to make installation easy.



Heritage Insulated Steel Entry Door

Standard Features

- Patented aluminum clad jamb system is easy to install.
- Aluminum mounting flange with snap-in vinyl flush brickmold lends a more traditional look.
- 25-gauge steel door core provides optimum strength.
- Thermally-broken threshold can be adapted for surface mounting (recessed entry).
- Four-legged dual durometer door sweep further protects against external elements.

Options

- Snap-in brick mold with flush or lap return leg
- Brushed nickel lockset and deadbolt
- Flush stainless knocker/viewer
- Kick plate
- Coventry lock system complete with 1" deep bolt
- Jamb sets for 4-1/2" or 6-1/2" wall depth
- Self-storing or full-view storm doors
- 5600 or 5900 Series Stormbuster storm door


7000 Series

AVAILABLE DOOR STYLES



Contact your Kinro representative for the full line of window styles available.

AVAILABLE STORM DOOR STYLES

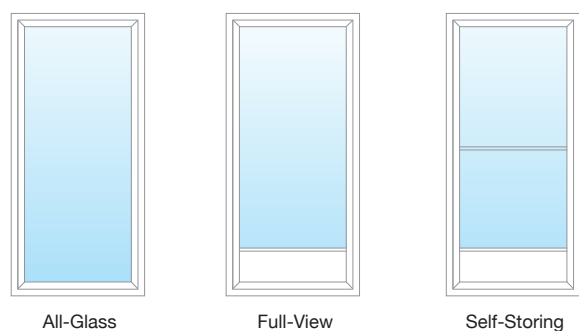

TEST DATA & APPROVALS

- Certified Sealed Insulating Glass Units for optimal thermal performance (dual glazed doorlites only)
- Designed and tested to meet the requirements of the IRC, the IECC, the HUD Manufactured Housing Standards, and the National Building Code of Canada
- AAMA Certified to AAMA/WDMA/CSA 101/I.S.2/A440 and/or AAMA 1702.2 (Consult Kinro Sales for specific ratings by model)
- NFRC Certified Thermal Performance Ratings (Consult Kinro Sales for specific ratings by model and selected doorlite)

STANDARD SIZES

Call sizes are the same as rough opening sizes. Rough opening must be exact $\pm 1/8"$

	Door Size	Rough Opening	Side Lite	Double Lite
SINGLE DOOR	34" x 76"	34" x 76"		
	34" x 80"	34" x 80"	48-1/2" x 80"	63" x 80"
	34" x 82"	34" x 82"	48-1/2" x 80"	63" x 82"
	38" x 80"	38" x 80"	52-1/2" x 80"	67" x 80"
	38" x 82"	38" x 802"	52-1/2" x 82"	67" x 82"
PATIO SWING DOOR	66-1/2" x 76"	66-1/2" x 76"	n/a	n/a
	66-1/2" x 80"	66-1/2" x 80"	n/a	n/a
	66-1/2" x 82"	66-1/2" x 82"	n/a	n/a
	74-1/2" x 80"	74-1/2" x 80"	n/a	n/a
	74-1/2" x 82"	74-1/2" x 82"	n/a	n/a

7660 Series

The sturdy and attractive 7660 House Type Steel Entry Door Series is designed to provide both beauty and utility to your home. With several style combinations, decorative window configurations, and innovative features this series has a door to match the needs of each of your home entry points. The versatile and weather-resistant line features 25-gauge steel core, three sides of heavy-duty weather stripping, thermally-broken threshold and four leaf sill sweep sealing system.



House Type Steel Entry Door

Standard Features

- 25-gauge steel door core provides stability.
- Core is edge bored and capped for easy addition of deadbolt.
- Prefinished jamb system makes installation easy.
- Foam-filled compression seals add extra weather resistance.
- Thermally-broken threshold stands up to heavy foot traffic.
- Four leaf sill sweep protects against the elements.
- Self-storing heavy-duty aluminum-framed storm door with stainless steel bushings in hinges lends extra versatility.

Options

- Deadbolt lock
- 5900 Series Storm Buster storm door
- Satin nickel bright brass lockset and deadbolt
- Available in white, clay or mill
- Bright brass knocker/viewer
- Fiberglass cores
- Full-view or all-glass storm door

7660 Series

AVAILABLE DOOR STYLES



6-Panel



2-Light



9-Light




Brass Half Round




Sunburst



Silver Oval



Square Bevel

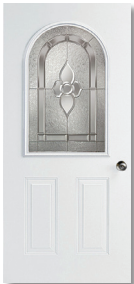

Arched Half Door




Etched Oval

Contact your Kinro representative for the full line of window styles available.


AVAILABLE STORM DOOR STYLES



All-Glass



Full-View



Self-Storing

STANDARD SIZES

Call sizes are the same as rough opening sizes. Rough opening must be exact $\pm 1/8"$

Call Size	Call Size
34" x 76"	38" x 76"
34" x 80"	38" x 80"
34" x 82"	38" x 82"

8000 Series

The classic and energy-efficient 8000 Fiberglass Entry Door Series features many charming styles and decorative window and grid configurations to complement your home's unique curb appeal. Its no-maintenance, sturdy structure provides ultimate stability and will stand the test of time. The attractive and weather-resistant line also features a reinforced, heavy-duty framework built of stiles and lock block.



Fiberglass Entry Door

Standard Features

- No paint required.
- Maintenance-free; rot-, dent- and rust-resistant.
- Non-rot stiles and rails protect door's structural integrity.
- Energy-efficient CFC-free Polyurethane foam core saves you money in the long run.
- Stiles and lock block provide structural framework.
- Durable butt hinges stand up to consistent, heavy use.
- No-rot Dura Frame™ jambs and brickmold system designed to last.
- Attractive double hip panel design adds beauty to your home's décor.
- Thermally-broken and adjustable threshold stands up to heavy foot traffic.
- Foam-filled compression seals add extra weather resistance.

Options

- Composite lap or flush brickmold
- Knob and lock set

8000 Series

AVAILABLE DOOR STYLES



3-Panel Door



6-Panel



2-Light



1-Light



6-Light



9-Light



10-Light



15-Light



Clear Half Round



Clear Sunburst




Full Etched Oval



Silver Full Oval



Silver Half Round



Arched Half Door



Silver Half Door




Silver Full Door

Contact your Kinro representative for the full line of window styles available.


AVAILABLE STORM DOOR STYLES



All-Glass



Full-View



Self-Storing

TEST DATA & APPROVALS

- Certified Sealed Insulating Glass Units for optimal thermal performance (dual glazed doorlites only)
- Designed and tested to meet the requirements of the IRC, the IECC, the HUD Manufactured Housing Standards, and the National Building Code of Canada
- AAMA Certified to AAMA/WDMA/CSA 101/I.S.2/A440 and/or AAMA 1702.2 (Consult Kinro Sales for specific ratings by model)
- NFRC Certified Thermal Performance Ratings (Consult Kinro Sales for specific ratings by model and selected doorlite)

STANDARD SIZES

Call sizes are the same as rough opening sizes. Rough opening must be exact $\pm 1/8"$

	Door Size	Rough Opening	Side Lite	Double Lite
SINGLE DOOR	34" x 82"	34" x 82"		
	38" x 82"	38" x 82"	53" x 82"	68" x 82"

9000 Series

The timeless traditional grace of the 9000 Heritage II Fiberglass Entry Door Series will add impeccable appeal to any home. With an extensive selection of classic door styles and decorative window and grid configurations, the 9000 Series provides all the beauty and features you want. Its sturdy fiberglass door core, stiles and lock block combined create a fortified internal framework for long-lasting security, and its thermally-broken threshold and foam-filled compressions seals lend potent weather resistance and protects against wear and tear.




Heritage II Fiberglass Entry Door

Standard Features

- Patented aluminum clad jamb system makes installation easy.
- Aluminum mounting flange with snap-in vinyl flush brickmold lends a traditional look.
- Fiberglass door core reinforced with stiles and lock block.
- Thermally-broken adjustable threshold stands up to heavy foot traffic.
- Maintenance-free.
- Rot-, dent- and rust-resistant.
- Energy-efficient Polyurethane foam core saves you money in the long run.
- Double hip panel design gives classic look.
- Foam-filled compression seals provide weather resistance.
- Durable butt hinges stand up to heavy use.


9000 Series

AVAILABLE DOOR STYLES

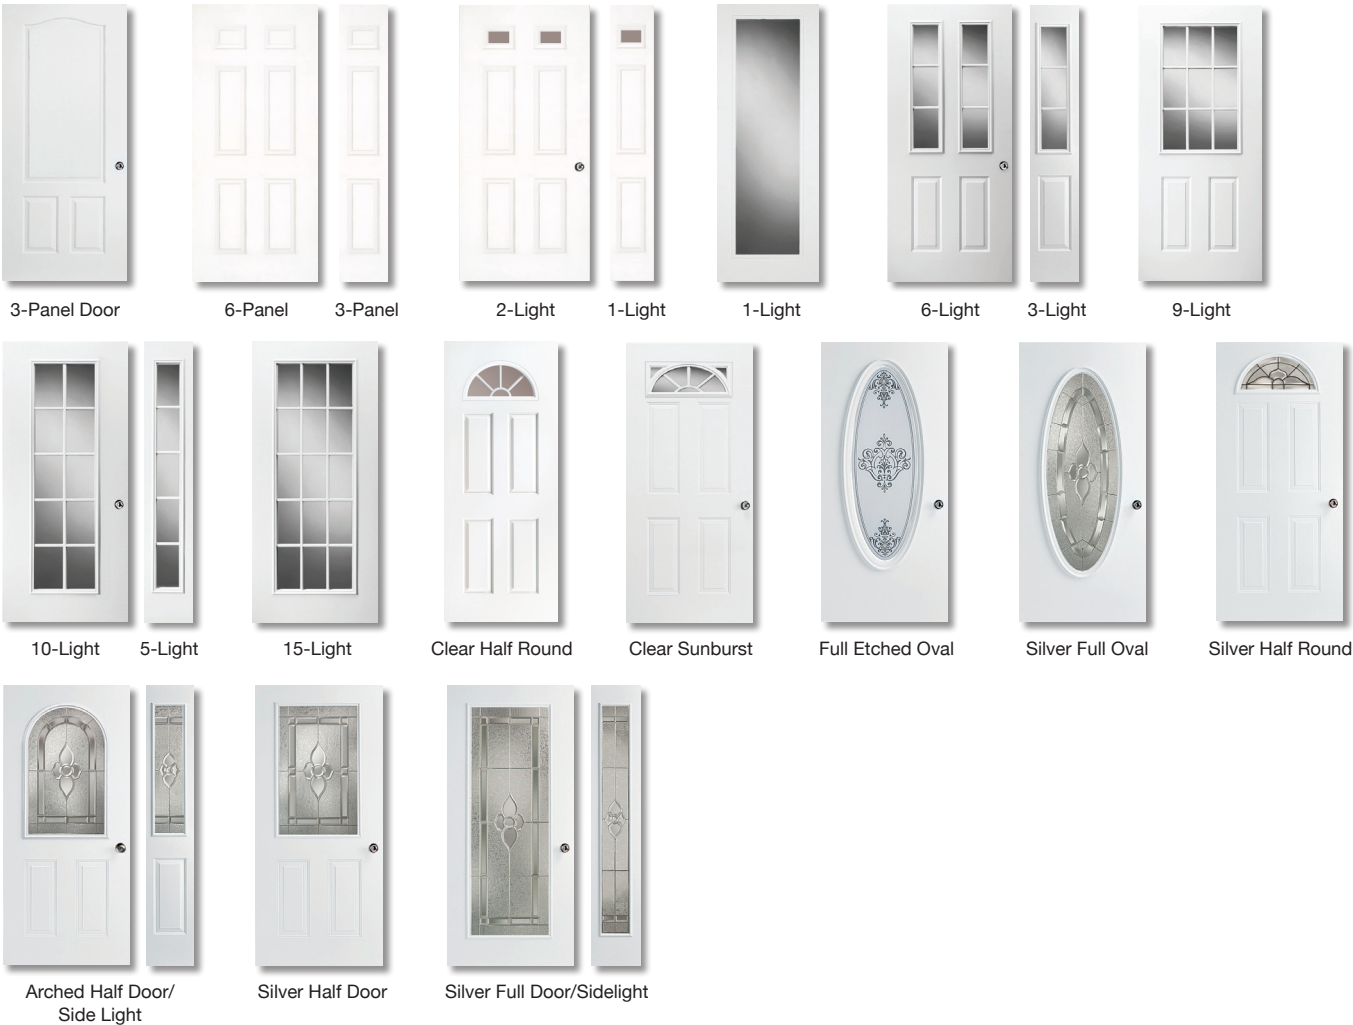

Contact your Kinro representative for the full line of window styles available.

AVAILABLE STORM DOOR STYLES

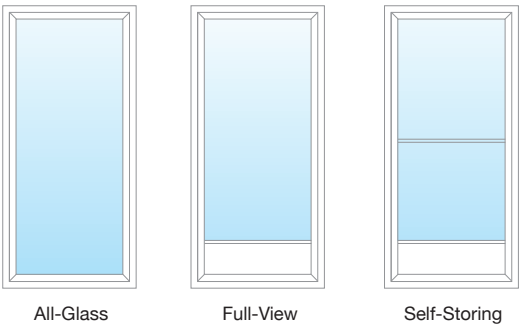

TEST DATA & APPROVALS

- Certified Sealed Insulating Glass Units for optimal thermal performance (dual glazed doorlites only)
- Designed and tested to meet the requirements of the IRC, the IECC, the HUD Manufactured Housing Standards, and the National Building Code of Canada
- AAMA Certified to AAMA/WDMA/CSA 101/I.S.2/A440 and/or AAMA 1702.2 (Consult Kinro Sales for specific ratings by model)
- NFRC Certified Thermal Performance Ratings (Consult Kinro Sales for specific ratings by model and selected doorlite)

STANDARD SIZES

Call sizes are the same as rough opening sizes. Rough opening must be exact $\pm 1/8"$

	Door Size	Rough Opening	Side Lite	Double Lite
SINGLE DOOR	34" x 82"	34" x 82"		
	38" x 82"	38" x 82"	52-1/2" x 82"	67" x 82"
PATIO SWING DOOR	74-1/2" x 82"	74-1/2" x 82"	n/a	n/a

Warranty

Kinro's Product Limited Warranty

Duration

This warranty is honored for a period of one year from the date of original retail purchase by the original retail purchaser or eighteen (18) months from date of delivery to the manufacturer or dealer by Kinro, whichever occurs first.

Coverage

Kinro warrants the product sold pursuant to this warranty to be free of defects in materials and workmanship under normal use only when installed and maintained in accordance with Kinro's instructions and used for its intended purpose. This warranty is extended only to the original retail purchaser. In the case of defect, Kinro will repair or replace any defective product free of charge or return the original purchase price, provided the claim procedures as set forth in this warranty are followed.

The warranty on any Kinro product furnished as a replacement for a Kinro product will be limited to the balance of the time remaining on the warranty on the original product. Kinro assumes the responsibility and liability under this Warranty for repair or replacement of the defective product only and shall not be responsible for any incidental, consequential, or special damages resulting from any defect in a Kinro product or failure of a Kinro product to conform with this warranty or any implied warranty existing under the law.

The remedy provided for in this warranty shall be the sole and exclusive remedy for any breach of this warranty as well as for any breach of any implied warranty existing under the law. Some states do not allow the exclusion or limitation of consequential damages, so the above limitation or exclusion may not apply to you.

This warranty is in lieu of all other representations and express warranties.

All implied warranties, if any, existing under the law are limited in duration to the period of this warranty. Some states do not allow limitations on how long an implied warranty lasts, so the above limitation may not apply to you.

In the event any Kinro product sold pursuant to this warranty is put to a commercial rental, or other non-personal, non-family or non-household use by the original retail purchaser, then all implied warranties existing under the law are expressly negated, particularly in such event Kinro negates the implied warranty of merchantability and the implied warranty of fitness for a particular purpose.

Claim Procedures

Upon discovery of a defect or problem with a Kinro product, please e-mail Kinro, Inc. at **warranty@kinro.com**. The written notice should include name, address, description of defect or problem, make of unit, serial number, location of product and where you can be reached during business hours. This warranty gives you specific legal rights, and you may also have other rights which may vary from state to state.

Notes

How to measure for replacement doors

DOOR VOCABULARY


Jamb – wood framework that surrounds the doorway

Door Swing Direction – this is used to determine which sides will be hinged and which will have the door knob; when you view your door from the exterior, the hinges will be on the side you call the direction; hinges on the right, mean a right-hand door

Outswing/Inswing – most exterior doors are inswing, meaning they open to the interior of the home

Sweep/weather stripping – usually a metal/rubber plate adhered to the bottom of the door, and/or door edge to prevent air leaks or to keep debris from entering


Trim – the decorative piece that is attached to your interior and exterior walls and door jamb to hide where the jamb meets the surface material. It should never be included in any replacement door measurements

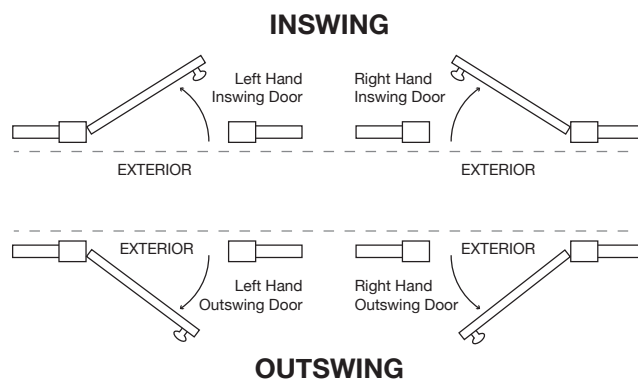

MEASURING TIPS

1. Draw a rough diagram of the door from the exterior view. Appropriately indicate the hinges and handle/knob and you will know which way it hangs.
2. Label it a right- or left-hand door and inswing or outswing just to be safe.
3. Record your measurements on your drawn diagram. Measure the width, height and thickness of the door. Make sure you do not include any other features, like weather stripping. ONLY measure the door. Write down the exact measurements and, in parentheses, round them up to the nearest inch.
4. Measure the width of the door jamb. Do not measure any of the trim materials. When you face the jamb, you will measure from the back of the interior trim piece to the back of the exterior trim piece.
5. To be on the safe side, measure the height and width of the framed door space – not including any trim materials.

Now you are ready to choose the right door to fit your size and aesthetic needs.

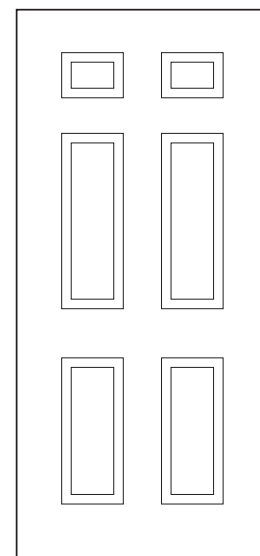



CORPORATE HEADQUARTERS

3501 County Road 6 East
Elkhart, IN 46514
574-535-1125

Serving our customers from coast to coast

ALABAMA

112 Brewer Street
Double Springs, AL 35553
205-489-5051

IDAHO

944 N Kings Road
Nampa, ID 83687
208-466-4523

INDIANA

2423 Messick Road
Goshen, IN 46526
574-534-6660

TEXAS

101 Mushroom Road
Waxahachie, TX 75165
972-937-2002

SOUTH CAROLINA

524 Phillips Ind. Drive
Chester, SC 29706
803-385-5171

Proud member of:

