

6

5

4

3

2

1

TABLE 1				
CATALOG NO.	CABLE TYPE	CABLE OD	CONNECTOR TYPE	WIRING PIN OUT
NSC5Eccxx	CATEGORY 5E UTP, 4PR, 24 AWG, STRANDED BARE COPPER, PVC	0.216±0.008"	RJ45, 4P8C	T568B PER TIA-568-C.2
NSC6ccxx	CATEGORY 6 UTP, 4PR, 24 AWG, STRANDED BARE COPPER, PVC	0.236±0.006"		
cc = CABLE/BOOT COLOR - REF TABLE 2 xx = LENGTH IN FEET				

D

D

C

C

B


B

A

A

END 1

END 2

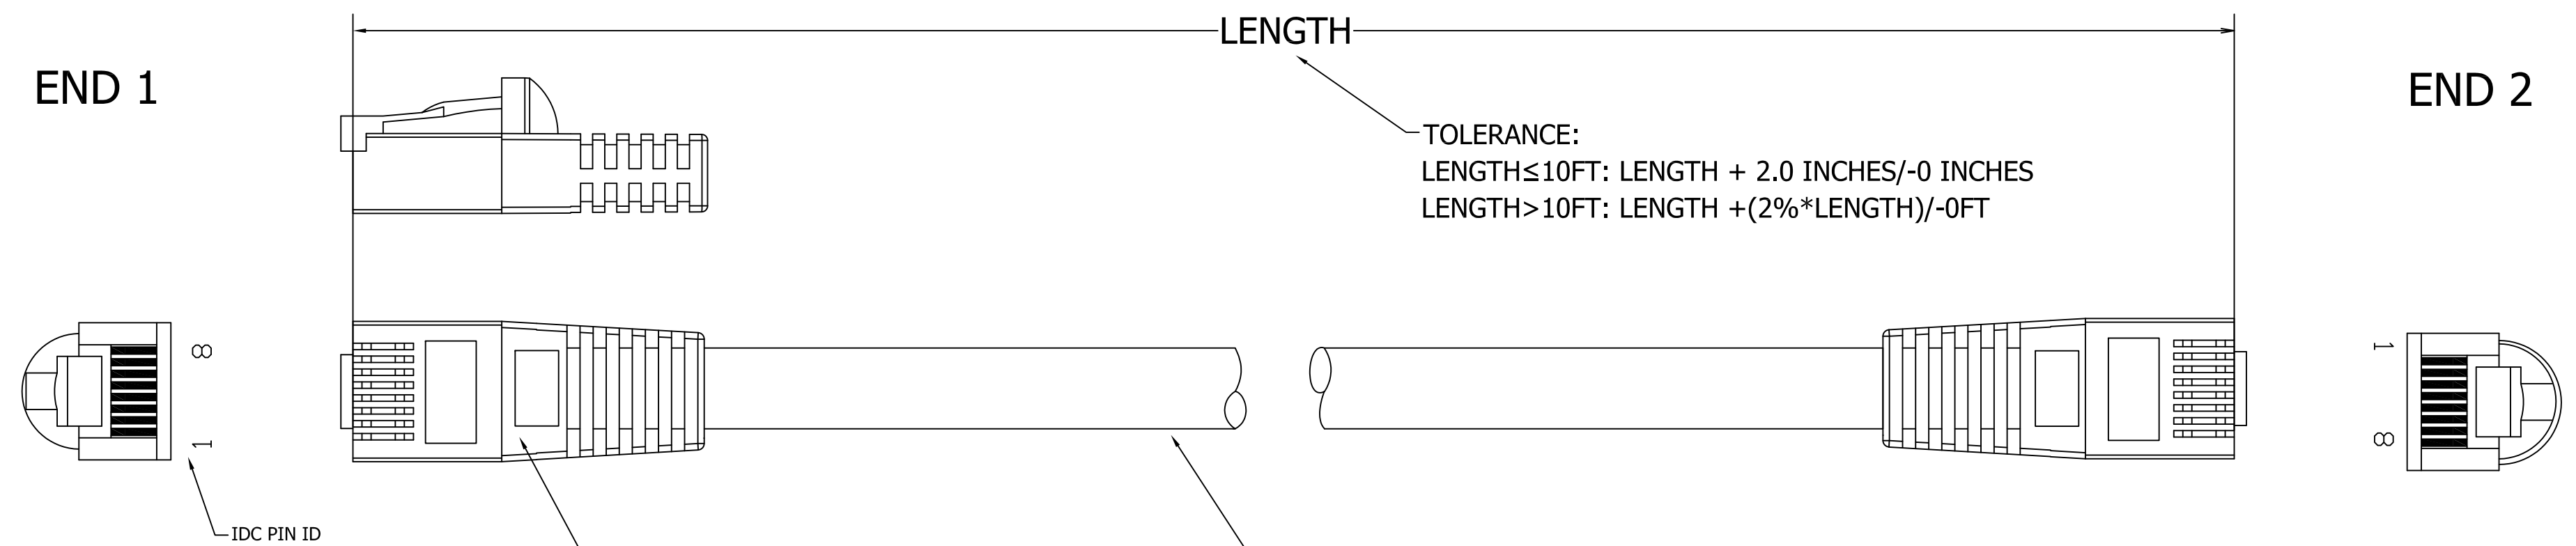


STRAIN RELIEF BOOT COLOR: SEE TABLE 1

CABLE TYPE: SEE TABLE 1  
COLOR: SEE TABLE 1  
JACKET LEGEND: SEE TABLE 1

"cc"	COLOR
B	BLUE
GY	GRAY
W	WHITE
BK	BLACK

NOTES:

- PATCHCORD IS RoHS2 COMPLIANT
- SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

Created on AUTOCAD	DIMENSIONING AND TOLERANCE PER ANSI Y14.5M-1982 UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES (MM). TOLERANCES .XX = ±.01 (.25) .XXX = ±.005 (.127) .XXXX = ±.0025 (.0635) ANGLE TOL ±1°		PROJECT REFERENCE: <b>NPD-00964</b>		 <b>Hubbell Premise Wiring</b> HUBBELL INCORPORATED (Delaware) 14 Lord's Hill Road, Stonington, Connecticut 06378
	IN ACCEPTING OUR DRAWINGS, BLUEPRINTS, OR SUPPORTING DOCUMENTATION FOR QUOTATION OR OTHER PURPOSES, YOU AGREE NOT TO DISCLOSE TO OTHERS THE IDEAS, INFORMATION, OR DESIGNS SHOWN HEREIN, AND THAT YOU WILL MAKE NO USE OF SAME WITHOUT PERMISSION		MATERIAL: SEE NOTES		
			DRAWN BY: O.SAVI		TITLE: NETSELECT COPPER PATCH CORDS C5E & C6, UTP, T568B, 4P8C
			CHECKED BY:		SIZE: <b>C</b> DRAWING NO.: <b>HWS14633C</b> REV.: <b>2</b>
		APPROVED BY:		SCALE: 1/1 SHEET 1 OF 1	

REV.	ECN	DATE	DESCRIPTION	CHG BY	APPD BY
2	21405	08/10/16	REVISED COLORS	JJRJ	DO