

Features


- Quarter-turn washerless ceramic disc valves
- Vandal-resistant laminar outlet
- Wristblade Lever handles
- Less drain
- 1.0 gal/min (3.8 l/m) maximum flow rate at 60 psi (4.14 bar).

Material

- Solid-brass construction for durability and reliability
- Brass valve bodies

Installation

- For 4" (102 mm) centers

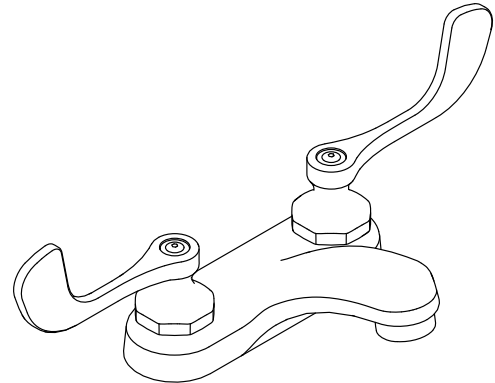

ADA **CSA B651** **OBC**



Codes/Standards

ASME A112.18.1/CSA B125.1
NSF/ANSI/CAN 61
NSF/ANSI/CAN 372
DOE - Energy Policy Act 1992
EPA WaterSense®
ADA
ICC/ANSI A117.1
CSA B651
OBC

KOHLER® One-Year Limited Warranty

See website for detailed warranty information.

Available Colors/Finishes

Color tiles intended for reference only.

Color	Code	Description
-------	------	-------------

	CP	Polished Chrome
---	----	-----------------

