WOLVERINE BRASS, INC.

WBPRO FULL PORT COPPER SWEAT BALL VALVES

VALVE CONSTRUCTION:


- ☐ FULL PORT DESIGN.
- ☐ FORGED BRASS BODY.
- ☐ BRASS STEM.
- ☐ PLATED LOCK WASHER.
- ☐ CHROME PLATED MACHINED BRASS ROD BALL.
- ☐ BRASS ADJUSTABLE PACK NUT.
- ☐ NON-STICK TEFLON SEATS.
- ☐ CHROME PLATED REVERSIBLE STEEL HANDLE.
- ☐ DOUBLE STEM SEAL (TEFLON PACKING AND O-RING).

OPERATION:

- ☐ LEVER HANDLE.
- ☐ 90° TURN FROM FULL OFF TO FULL ON.
- ☐ 100% TESTED UNDER WATER.
- ☐ 600 WOG (Water, Oil, or Liquid Gas)
- ☐ 150 PSI SATURATED STEAM.

STANDARDS:

- ☐ IAPMO/UPC
- ☐ CSA
- ☐ LOW LEAD COMPLIANT (0.25% Pb MAX).

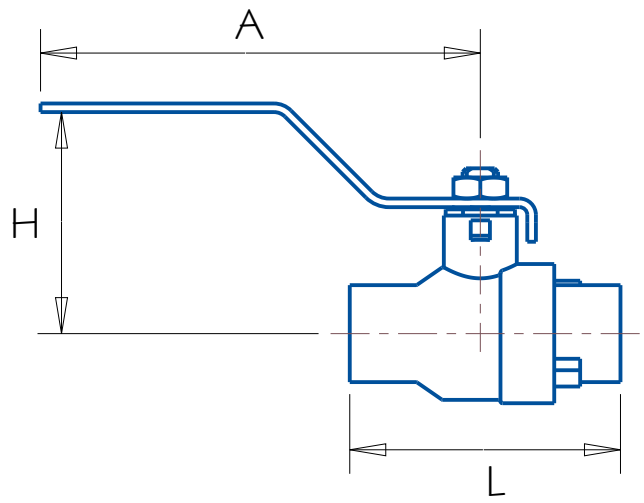

COPPER SWEAT LESS DRAIN				
PART	SIZE	L	H	A
56108NL	1/2"	2-1/8"	1-5/8"	3-3/8"
56109NL	3/4"	2-7/8"	1-7/8"	4-3/8"
56110NL	1"	3-3/8"	2"	4-1/2"
56121NL	1-1/4"	3-7/8"	2-3/8"	5-1/8"
56122NL	1-1/2"	4-3/8"	2-1/2"	5-1/8"
56123NL	2"	5-1/2"	2-3/4"	5-1/8"
56126NL	2-1/2"	6-3/8"	4-1/8"	7-1/2"
56124NL	3"	7"	4-1/4"	8-3/8"

COPPER SWEAT WITH DRAIN				
PART	SIZE	L	H	A
56114NL	1/2"	2-3/8"	1-5/8"	3-1/2"
56115NL	3/4"	2-7/8"	1-7/8"	4-3/8"
56116NL	1"	3-1/2"	2-1/8"	4-3/8"