

SAFETY INFORMATION

Released Date: 2024-10-29

Please read and understand this entire manual before attempting to assemble, install or operate the product.

WARNING


- RISK OF ELECTRIC SHOCK - Before beginning installation, turn off electricity at the circuit breaker box or the main fuse box.

CAUTION

- For your safety, read instructions completely before beginning installation.
- If in doubt about electrical installation, consult a licensed electrician.

42 TOOLS REQUIRED

Ratings	120-277Vac, 60Hz	
	Model No.	Wattage
	BIN2818MBK	14W
	BIN2818BRG	14W
	BIN1718MBK	14W
	BIN1718BRG	14W

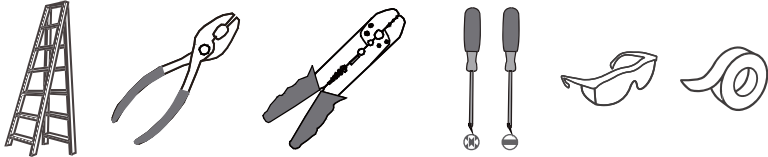


CARE AND MAINTENANCE

- Wipe clean using soft, dry cloth or static duster. Always avoid using harsh chemicals and abrasives to clean fixture as they may damage the finish.

If you need further assistance call Quoizel Customer Care at 1-800-645-3184 (9:00am - 5:00pm EST), or visit us on-line at www.quoizel.com.

PACKAGE CONTENTS

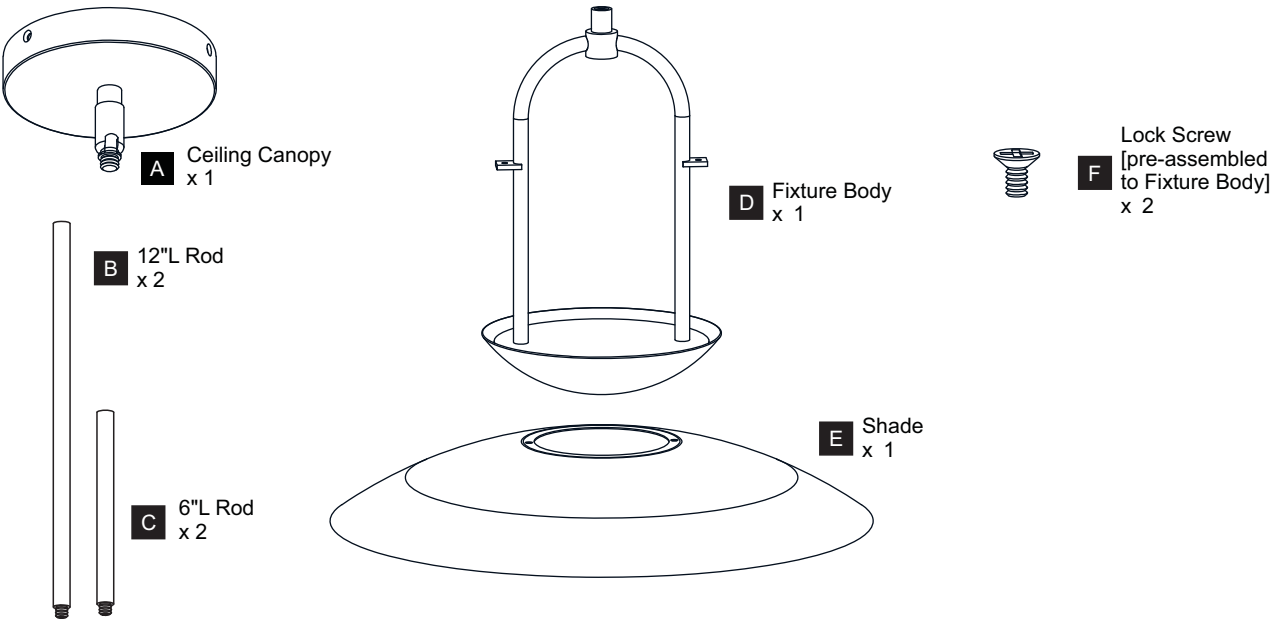


MOUNTING HARDWARE



INSTALLATION

OPTION 1: PENDANT - BIN2818MBK AND BIN2818BRG

1 **Install Shade**

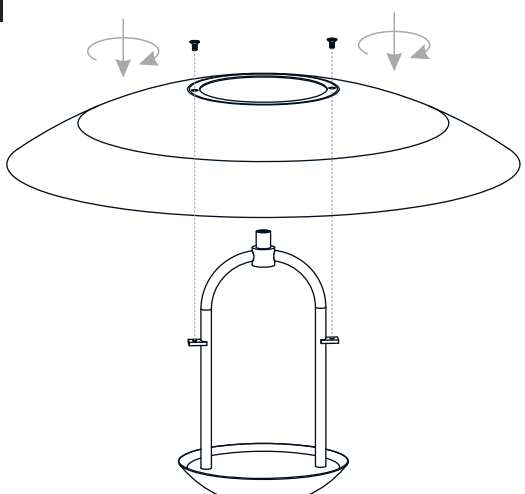


2 **Install Rods**


Optional Rods:

8 Feet Ceiling:
(2) 12"L Rods.


9 Feet Ceiling:
(2) 6"L Rods + (2) 12"L Rods.

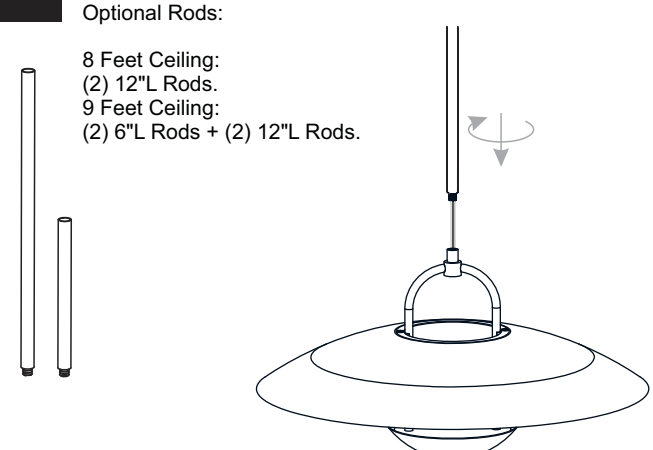

3 **Install Ceiling Canopy to Upper Rod**




4 **Connect Fixture Wires to Driver**

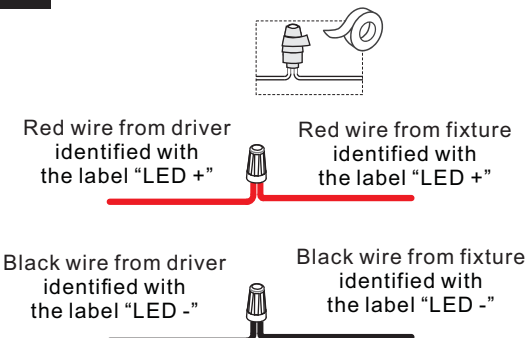


Red wire from driver identified with the label "LED +" Red wire from fixture identified with the label "LED +"

Black wire from driver identified with the label "LED -" Black wire from fixture identified with the label "LED -"

5 **Install Inner Backplate**

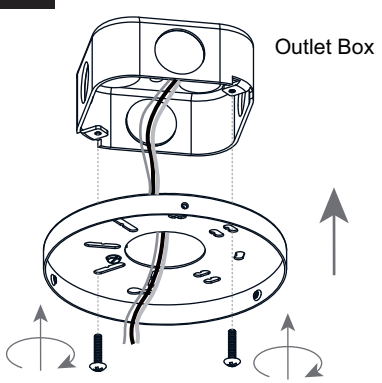

6 **Wiring**

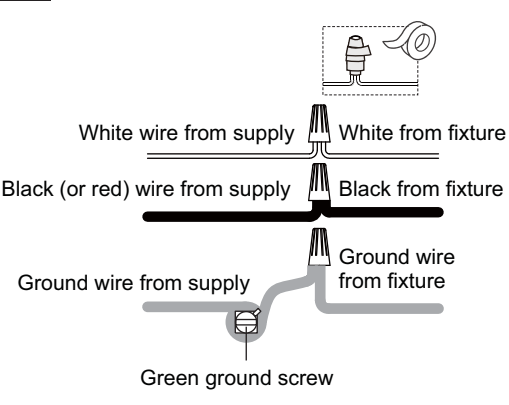


White wire from supply White from fixture

Black (or red) wire from supply Black from fixture

Ground wire from supply Ground wire from fixture

Green ground screw

7 **Install Fixture to Inner Backplate**

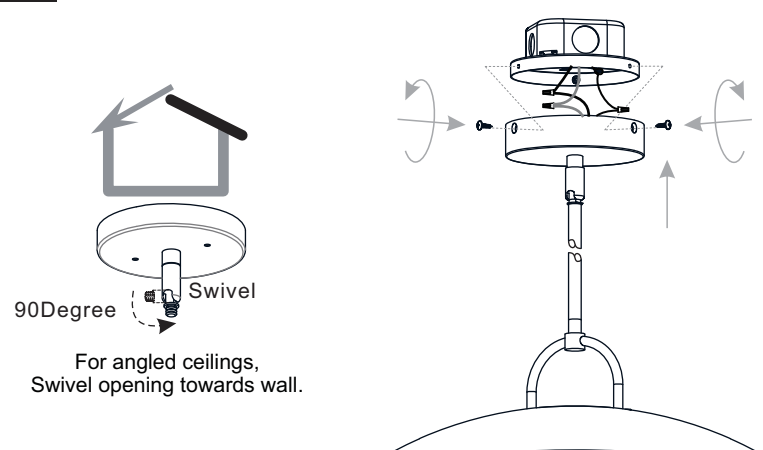

90Degree Swivel


For angled ceilings,
Swivel opening towards wall.

INSTALLATION

IMPORTANT: This CONVERTIBLE fixture can be mounted as pendant light or semi-flush light. **DO NOT CUT SUPPLY WIRES** if you intend to use it as pendant light.

OPTION 2: SEMI-FLUSH - BIN1718MBK, BIN1718BRG

* Set aside (2) 6"L Rods and (2) 12"L Rods since they are not required for the semi-flush installation.



1 Remove Swivel

Set aside swivel

2 Install Shade

3 Install Ceiling Canopy

4 Connect Fixture Wires to Driver

Red wire from driver identified with the label "LED +" Red wire from fixture identified with the label "LED +"

Black wire from driver identified with the label "LED -" Black wire from fixture identified with the label "LED -"

5 Install Inner Backplate

Outlet Box

6 Wiring

White wire from supply White from fixture

Black (or red) wire from supply Black from fixture

Ground wire from supply Ground wire from fixture

Green ground screw

7 Install Fixture to Inner Backplate

Your installation is now complete! Restore electricity and save this sheet for future reference.