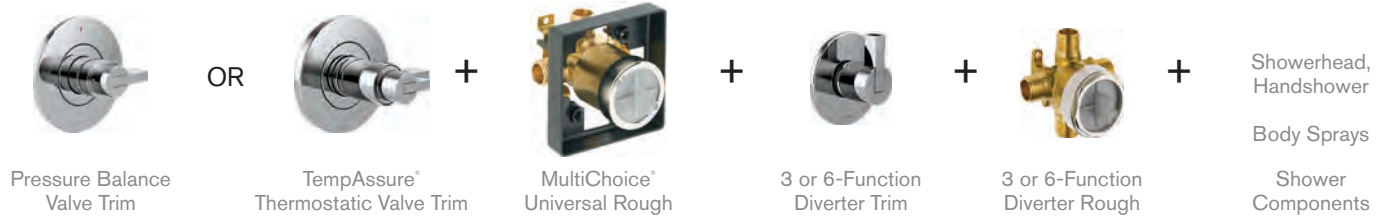


PRESSURE BALANCE AND TEMPASSURE® THERMOSTATIC CUSTOM SHOWERS

For more information about Pressure Balance and TempAssure Thermostatic Custom Showers, see page 333.

The ideal shower experience means something different to everyone. To that end, Brizo® Pressure Balance and TempAssure Thermostatic custom shower systems provide more control, so you can enjoy a completely personal experience.






VALVE TRIMS

ITEM	ITEM NO.	DESCRIPTION
	TRIM ONLY T60P035-PCLHP T60P035-PNLHP T60P035-NKLHP T60P035-GLLHP T60P035-SLLHP	<ul style="list-style-type: none"> Single-function pressure balance cartridge For use with MultiChoice® Universal rough Handle adjusts temperature Red/Blue temperature markings MUST ORDER HANDLES SEPARATELY RP81665 extension kit extends rough installation up to 1 3/4"

PRESSURE BALANCE VALVE ONLY TRIM - LESS HANDLES

HANDLE KITS: PRESSURE BALANCE VALVE ONLY TRIMS

ITEM	ITEM NO.	ITEM	ITEM NO.	ITEM	ITEM NO.	DESCRIPTION
	HL60P32-PC HL60P32-PN HL60P32-NK HL60P32-GL HL60P32-SL		HL60P33-PC HL60P33-PN HL60P33-NK HL60P33-GL HL60P33-SL		HL60P34-PC HL60P34-PN HL60P34-NK HL60P34-GL HL60P34-SL	<ul style="list-style-type: none"> All handles ADA compliant except Wheel Handle Model number = one handle Textural knurling detail on the T-Lever and Wheel Handles "Hot" and "Cold" debossed letters on Industrial Lever Handles
	HL60P39-PC HL60P39-PN HL60P39-NK HL60P39-GL HL60P39-SL		HW60P32-PC HW60P32-PN HW60P32-NK HW60P32-GL HW60P32-SL			




TUB/SHOWERS

ITEM

ITEM NO.

DESCRIPTION




TRIM ONLY
T60235-PCLHP
T60235-PNLHP
T60235-NKLHP
T60235-GLLHP
T60235-SLLHP

- H₂Okinetic® Technology with self-cleaning spray holes
- TempAssure® Thermostatic medium flow valving
- For use with MultiChoice® Universal rough
- Independent temperature and volume control
- 8" H₂Okinetic® multi-function showerhead; 1.75 gpm @ 80 psi, 6.6 L/min @ 550 kPa
- Jointed solid brass shower arm with two locking hinges for positioning
- Maximum flow rate guide available in the Custom Shower section
- **MUST ORDER HANDLES SEPARATELY**



TEMPASSURE® THERMOSTATIC SHOWER ONLY TRIM - LESS HANDLES



TRIM ONLY
T60035-PCLHP
T60035-PNLHP
T60035-NKLHP
T60035-GLLHP
T60035-SLLHP

- TempAssure® Thermostatic medium flow valving
- For use with MultiChoice® Universal rough
- Independent temperature and volume control
- Maximum flow rate guide available in the Custom Shower section
- **MUST ORDER HANDLES SEPARATELY**

TEMPASSURE® THERMOSTATIC VALVE ONLY TRIM - LESS HANDLES

HANDLE KITS: TEMPASSURE® THERMOSTATIC VALVE TRIMS

ITEM


ITEM NO.

ITEM

ITEM NO.


ITEM

ITEM NO.




HL6032-PC
HL6032-PN
HL6032-NK
HL6032-GL
HL6032-SL

LEVER




HL6033-PC
HL6033-PN
HL6033-NK
HL6033-GL
HL6033-SL

T-LEVER




HL6034-PC
HL6034-PN
HL6034-NK
HL6034-GL
HL6034-SL

INDUSTRIAL LEVER



HL6039-PC
HL6039-PN
HL6039-NK
HL6039-GL
HL6039-SL

NOTCH LEVER



HW6032-PC
HW6032-PN
HW6032-NK
HW6032-GL
HW6032-SL

WHEEL

DESCRIPTION

- All handles ADA compliant except Wheel Handle
- Model number = one set of handles
- Textural knurling detail on the T-Lever and Wheel Handles
- "Temp" and "Vol" debossed letters on Industrial Lever Handles




TUB/SHOWER ROUGHS

ITEM

ITEM NO.


DESCRIPTION



R60000-UNBX
R60000-UNWS

- MultiChoice® Universal valve body only. Cartridge ships with trim.
- 1/2" universal inlets accept 1/2" copper, 1/2" iron pipe, PEX or CPVC adapters
- 1/2" universal outlets, inlets/outlets have male threads
- Back-to-back capability
- BX = single box model
- WS = with stops
- Extension kit available. See chart in the Custom Shower section for more details.

MULTICHOICE® UNIVERSAL TUB/SHOWER ROUGH



R60000-UNBXHF
R60000-UNWSHF

- MultiChoice® Universal valve body only. Cartridge ships with trim.
- For use with valve only or shower only models
- No tub outlet
- 1/2" universal inlets accept 1/2" copper, 1/2" iron pipe, PEX or CPVC adapters
- 1/2" universal outlets, inlets/outlets have male threads
- Back-to-back capability
- HF = high flow
- BX = single box model
- WS = with stops
- Extension kit available. See chart in the Custom Shower section for more details.

MULTICHOICE® UNIVERSAL HIGH-FLOW SHOWER ROUGH

Valve rating is 1.2 GPM minimum (4.5 L/min) at 45 psi (310 kPa) for Pressure Balance, TempAssure® Thermostatic and Sensori® Thermostatic trims. Stated flow rate for showerheads @ 80 psi maximum water usage.

LITZE®