


# nVent CADDY Rod Lock Spring Steel Strut Nut



## CONNECT AND PROTECT

The QCN combines the unique properties of Spring Steel and CADDY "push-to-install" technology to create a snap in place strut nut with shockingly quick install of threaded rod or bolts. Use with a hex nut on threaded rod for fast install of prefabricated trapeze systems or with a truss head bolt for unbelievably fast wall mounting of electrical boxes and other services.

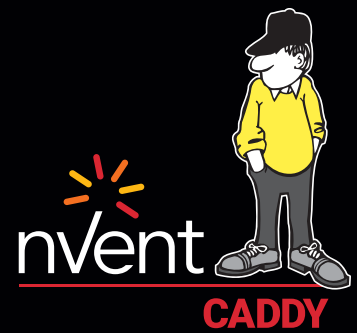


### FEATURES

- Easy "push-to-install" design allows installers to simply push the threaded rod through the mounting hole, instantly holding it in position
- Works with slightly damaged threads and minor burrs on the threaded rod
- Perfect for quickly installing branch runs either at the load with standard strut or at the structure in combination with embedded strut
- Integrated design eliminates the need for finicky spring nuts and loose hardware, simplifying install
- Quickly wall mount enclosures using common threaded bolts
- Designed for use with standard strut widths (1 5/8" or 41 mm) both shallow and deep profiles

Material: Spring Steel  
Finish: nVent CADDY Armour

| Part Number | Rod Size RS | Height H | A      | B      | Static Load 1 F1 | Static Load 2 F2 | Static Load 3 F3 | Torque TQ |
|-------------|-------------|----------|--------|--------|------------------|------------------|------------------|-----------|
| 4QCN        | 1/4"        | 0.72"    | 1 1/2" | 1 1/2" | 75 lb            | 20 lb            | 30 lb            | 10 ft lb  |
| 5QCN        | 5/16"       | 0.72"    | 1 1/2" | 1 1/2" | 100 lb           | 25 lb            | 50 lb            | 10 ft lb  |
| 6QCN        | 3/8"        | 0.72"    | 1 1/2" | 1 1/2" | 110 lb           | 30 lb            | 50 lb            | 20 ft lb  |
| 8QCN        | 1/2"        | 0.67"    | 1 1/2" | 1 1/2" | 125 lb           | 30 lb            | 50 lb            | 25 ft lb  |

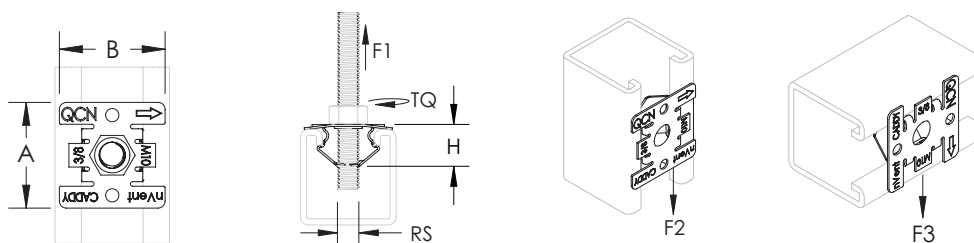

Our powerful portfolio of brands:

**CADDY ERICO HOFFMAN RAYCHEM SCHROFF TRACER**