




1PLD6004, UV Rated Black, 2-sided, 4-ports, #4 AWG-600 kcmil

By Burndy
Catalog # 1PLD6004

UNITAP™ PLD = Multi-Port Double Sided Entry

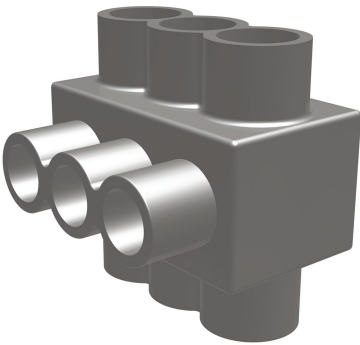

Features

- UV Rated Covering over AL6061-T6 aluminum body saves time, lowering installation costs and eliminates taping
- Oxide inhibitor pre-installed inhibits moisture and contaminants from entering the contact area
- Range-taking capability reduces the number of connectors necessary to carry in inventory

Application

For Indoor Use Only, Copper Or Stranded Aluminum

Specifications

Buy American Compliant	No
Certification - cULus	No
EU RoHS Indicator	Yes
Certification - UL Recognized	No
Certification - ETL	No
Standards - RoHS Compliance Status	CM
Certification - CSA Approved	No
UL Listed	Yes
Certification - UL Listed Direct Burial	No

Conductor

Conductor - Copper Str Size	• 4 AWG
	• 3 AWG
	• 2 AWG
	• 1 AWG
	• 1/0
	• 2/0 AWG
	• 3/0 AWG
	• 4/0 AWG
	• 250 kcmil
	• 300 kcmil
	• 350 kcmil
	• 400 kcmil
Conductor - AL Str Size	• 450 kcmil
	• 500 kcmil
	• 550 kcmil
	• 600 kcmil
	• 4 AWG
	• 3 AWG
	• 2 AWG
	• 1 AWG

- 1/0 AWG
- 2/0 AWG
- 3/0 AWG
- 4/0 AWG
- 250 kcmil
- 266 kcmil
- 300 kcmil
- 336 kcmil
- 350 kcmil
- 397 kcmil
- 400 kcmil
- 450 kcmil
- 477 kcmil
- 500 kcmil
- 550 kcmil
- 556 kcmil
- 600 kcmil

Conductor - AL Str Size Range	4 AWG - 600 kcmil
Conductor Size	4 AWG-600 KCMIL
Conductor - Copper Str Size Range	4 AWG - 600 kcmil
Conductor Type	• AL C Str-Size • CU C Str-Size

Configuration

Physical Attribute - Number of Screws	4
Connector Type	Multi Tap
Number Of Ports	4

Current

Voltage - Maximum	600 V
-------------------	-------

Dimensions

Dimension - L Length Overall mm	134 mm
Dimension - Height fraction	2.75 in
Dimension - Height inch	2.75 in
Dimension - Height mm	69.9 mm
Dimension - Screw Size inch Width	13/16 3 in
Dimension - Width inch	3.00 in
Dimension - Width mm	76 mm
Length	5.28 in
Dimension - Length Overall inch	5.28 in

Height

Dimensions

2.75 in

5.28 in x 3 in x 2.75 in

Force Related

Installation Torque

Recommended in-lb

375 LBS/in

General

Material - Hardware

Insulation Type

Trade Name

Insulation

Sub Brand

Physical Attribute - Screw Type

Plated

Type

UPC 12 Digit

Aluminum

Plastisol

UNITAP™

Y


UNITAP

Allen

N

BIBD, Multi-Port

781810287354



UPC 14 Digit GTIN

Material

Hex Key

Plating Type

UPC

00781810287354

Aluminum

3/8

Unplated

781810287354

Logistics

Minimum Pack Quantity

Carton Quantity

Pallet Quantity

1

40

600

Operational

Temperature Rating

194

Product Assets

[Catalog \[English\]](#)

[Catalog \[English\]](#)