SYMMONS® SafetyMix®

1-25-FSB
HAND SHOWER SYSTEM
Specification Submittal

Location:



Model Numbers

☐	**1-25-FSB**	Hand shower system with 30 inch adjustable slde bar, SafetyMix 3-port pressure balancing mixing valve #4-500

Options/Modifications

☐	**1.5**	*1.5 gpm (5.7 L/min) flow restrictor*
☐	**L2**	*Less hand shower (wand only)*
☐	**L5**	*Less hand shower system (less bar/cradle, hose, wand & elbow)*
☐	**L7**	*Less handle*
☐	**BX**	*Back connection with integral stops*
☐	**G**	*Dial thermometer*
☐	**VP**	*Vandal resistant escutcheon screws in place of standard screws*
☐	**X**	*Integral stops - allows water shut off at valve for service. Recommended for use on all multiple commercial installations*
☐	**X-3/4**	*3/4" valve to increase flow approximately 20%*
☐	**X-CHKS**	*Integral check stops - for use in installations where a positive shut-off device is used downstream of mixing valve*

Note: Append appropriate suffix to model number.

Feature Highlights

- Symmons SafetyMix 3-port pressure balancing mixing valve with lever handle and adjustable stop screw to limit handle turn.
- Open Flow FS hand shower with 5 foot flexible metal hose, dual checks for backflow protection, wall connection and flange
- 30 inch adjustable slide bar for mounting hand shower
- Standard flow rate 2.0 gpm (7.6 L/min)
  Optional lower flow rate restrictor available
- Polished chrome finish
- For optional in-line vacuum breaker order p/n EF-109

Warranty

Limited Lifetime - for residential installations.
10 Years - for commercial/industrial installations.
Refer to www.symmons.com/warranty for complete warranty information.

Compliance

- ASME A112.18.1-2024/CSA B125.1-24

Architectural/Engineering Specification


Symmons _____ HAND SHOWER SYSTEM. Includes SafetyMix 3-port pressure balancing mixing valve with lever handle and adjustable screw stop to limit handle turn, Open Flow FS hand shower with 5 foot flexible metal hose, dual checks for backflow protection, wall connection and flange, 30 inch adjustable slide bar for mounting hand shower, standard flow rate 2.0 gpm (7.6 L/min), and polished chrome finish. 10 Year Commercial Warranty. ASME A112.18.1-2024/CSA B125.1-24 compliant. Available options: "1.5 - 1.5 gpm (5.7 L/min) flow restrictor", "L2 - Less hand shower (wand only)", "L5 - Less hand shower system (less bar/cradle, hose, wand and elbow)", "L7 - Less handle", "BX - back connection with integral stops", "G - Dial thermometer", "VP - Vandal resistant escutcheon screw in place of standard screws", "X - Integral stops", "X-3/4 - 3/4" valve to increase flow approximately 20%", "X-CHKS - Integral check stops".

Symmons Industries, Inc. ▪ 31 Brooks Drive ▪ Braintree, MA 02184 ▪ Phone: (800) 796-6667 ▪ Fax: (800) 961-9621
Copyright © 2026 Symmons Industries, Inc. ▪ symmons.com ▪ gethelp@symmons.com ▪ ZV-1495 REV J ▪ 080626

SYMMONS® SafetyMix®

1-25-FSB

Dimensions

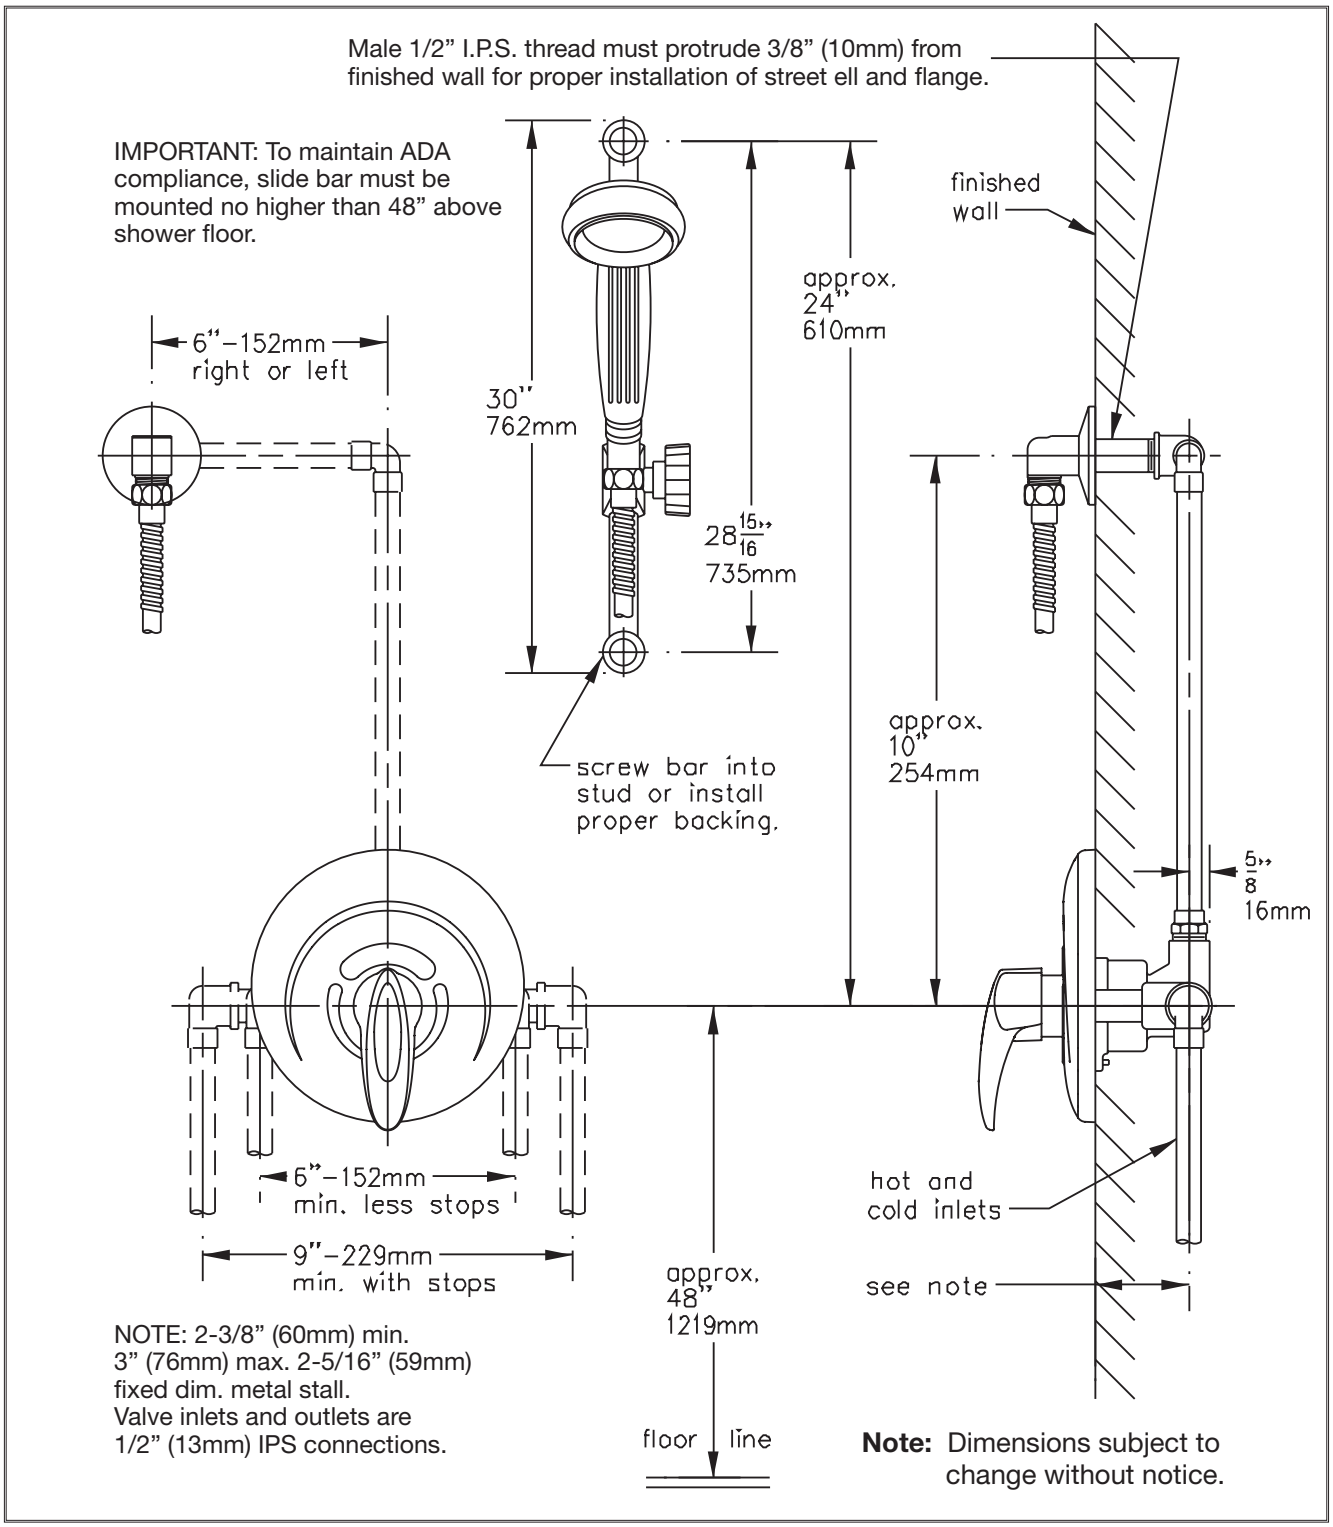

Symmons Industries, Inc. ▪ 31 Brooks Drive ▪ Braintree, MA 02184 ▪ Phone: (800) 796-6667 ▪ Fax: (800) 961-9621
Copyright © 2026 Symmons Industries, Inc. ▪ symmons.com ▪ gethelp@symmons.com ▪ ZV-1495 REV J ▪ 080626