

+3 pezzi speciali

trims - pieces speciales - formteile - piezas especiales - специальные изделия

	Dimensione Size						Fascia di prezzo Price band
	Not. Rett. 7x60 - 2 ^{3/4} "x23 ^{5/8} " Pcs. Box. 14 - LM x Box 8,40	E3C3	E3C4	E3C5	E3C6	E438	● 10
	Not. Rett. 4,6x80 - 1 ^{3/8} "x31 ^{1/2} " Pcs. Box. 12 - LM x Box 9,60	E3T6	E3T7	E3T8	E3T9	E42R	● 17
	Not. Rett. 7x60x60 2 ^{3/4} "x23 ^{5/8} "x23 ^{5/8} " Pcs. Box. 2 - LM x Box 1,20	-	EC6S	EC6T	EC6U	-	● 36
	Not. Rett. 7x60x60 2 ^{3/4} "x23 ^{5/8} "x23 ^{5/8} " Pcs. Box. 2 - LM x Box 1,20	DX -	DX EC6V	DX EC6X	DX EC6Z	DX -	● 36
		SX -	SX EC6W	SX EC6Y	SX EC70	SX -	
	Not. Rett. 33x120x3,2x3,2 12 ^{5/16} "x47 ^{1/4} "x1 ^{1/4} "x1 ^{1/4} " Pcs. Box. 2 - LM x Box 2,40	E9LG	E9LH	E9LJ	E9LK	EAPF	● 96
	Not. Rett. 33x120x3,2x3,2 12 ^{5/16} "x47 ^{1/4} "x1 ^{1/4} "x1 ^{1/4} " Pcs. Box. 1 - LM x Box 1,20	DX E9L2	DX E9L4	DX E9L6	DX E9L8	DX EAPD	● 98
		SX E9L3	SX E9L5	SX E9L7	SX E9L9	SX EAPF	

+3 20MM pezzi speciali

trims - pieces speciales - formteile - piezas especiales - специальные изделия

	Dimensione Size			Fascia di prezzo Price band
	Not. Rett. 33x60x5 12 ^{5/16} "x23 ^{5/8} "x1 ^{5/16} " Pcs. Box. 2 - LM x Box 1,20	EC77	EC7A	● 79B
	Not. Rett. 33x60x5 12 ^{5/16} "x23 ^{5/8} "x1 ^{5/16} " Pcs. Box. 2 - LM x Box 1,20	DX EC78	SX EC79	● 88
			DX EC7C	SX EC7D
	Not. Rett. 33x60x2,5 12 ^{5/16} "x23 ^{5/8} "x5/16" Pcs. Box. 2 - LM x Box 1,20	EC7H	EC7L	● 79B
	Not. Rett. 33x60x2,5 12 ^{5/16} "x23 ^{5/8} "x5/16" Pcs. Box. 2 - LM x Box 1,20	DX EC7J	SX EC7K	● 88
			DX EC7M	SX EC7N
	Not. Rett. 33x60 - 12 ^{5/16} "x23 ^{5/8} " Pcs. Box. 2 - LM x Box 1,20	EC7Q	EC7R	● 71
	Not. Rett. 16,5x60 - 6 ^{1/2} "x23 ^{5/8} " Pcs. Box. 2 - LM x Box 1,20	EC72	EC73	● 36
	 Not. Rett. 7x60x60 2 ^{3/4} "x23 ^{5/8} "x23 ^{5/8} " Pcs. Box. 2 - LM x Box 1,20	EC6T	EC6U	● 36

+3

Dry - Pressed Ceramic Tiles ISO 13006 Annex G - UNI EN 14411 Annex G - Bla UGL e GL



CARATTERISTICHE TECNICHE

Technical Features - Caracteristiques Techniques - Technische Eigenschaften
Technische Eigenschaften - Características Técnicas - Технические Характеристики

	ASSORBIMENTO D'ACQUA (VALORE MEDIO IN %) Water absorption (Average value expressed in %) - Absorption d'eau (Valeur moyenne en %) Wasseraufnahme (Durchschnittswert in %) - Absorción de agua (Valor medio en %) Поглощение воды	UNI EN ISO 10545/3 ASTM C373	CONFORME COMPLIANT																																																
	RESISTENZA ALLA FLESSIONE Modulus of rupture - Resistance a la flexion - Biegefestigkeit Resistencia a la flexion - Прочность на изгиб	SPESORE UNI EN ISO 10545/4	10 mm ≥ 45 N/mm ² 20MM ≥ 45 N/mm ²																																																
	FORZA DI ROTTURA Breaking strength - Résistance à la rupture - Bruchlast - Resistencia a la rotura - Разрывное усилие	UNI EN ISO 10545/4 ASTM C648	≥ 2000 N 400 Lbs ≥ 12000 N 2500 Lbs																																																
	RESISTENZA AL GELO Frost resistance - Résistance au gel - Frostbeständigkeit Resistencia a las heladas - Морозостойкость	UNI EN ISO 10545/12 ASTM C1026	CONFORME UNAFFECTED																																																
	RESISTENZA CHIMICA AD ALTE E BASSE CONCENTRAZIONI DI ACIDI E BASI Chemical resistance to high and low acid and basic concentrations Résistance chimique aux hautes et basses concentrations d'acides et de bases Chemikalienfestigkeit bei hohen und niedrigen Konzentrationen von Säuren und Basen Resistencia química con concentraciones altas y bajas de ácidos y bases Химическая стойкость к высоким и низким концентрациям кислот и щелочей	UNI EN ISO 10545/13 ASTM C-650	A - LA - HA UNAFFECTED																																																
	RESISTENZA ALLE MACCHIE Stain resistance - Résistance aux taches - Fleckenbeständigkeit Resistencia a las manchas - Стойкость к образованию пятен	UNI EN ISO 10545/14	5																																																
	COEFFICIENTE DI ATTRITO Slip resistance Coefficient de glissement Rutschfestigkeit Barfußbereich Coefficiente de atrito medio Коэффициент трения		<table><tr><th></th><th>NAT.</th><th>LAPP.</th><th>BOCC. ANTISLIP 20MM</th></tr><tr><td>DIN 51130</td><td>R10</td><td>-</td><td>R11</td></tr><tr><td>DIN 51097</td><td>B (A+B)</td><td>-</td><td>C (A+B+C)</td></tr><tr><td>ANSI A 137.1- 2012</td><td>WET ≥ 0,50</td><td>-</td><td>WET ≥ 0,65</td></tr><tr><td>DCOF (Section 9.6)</td><td>≥ 0,40</td><td>-</td><td>≥ 0,40</td></tr><tr><td>B.C.R.A.</td><td>P2</td><td>-</td><td>P4</td></tr><tr><td>AS 4586: 2013</td><td>P2</td><td>-</td><td>P4</td></tr><tr><td>Slip resistance classification of new pedestrian surface materials</td><td></td><td></td><td></td></tr><tr><td>BS 7976-2: 2002</td><td>> 36</td><td>-</td><td>> 36</td></tr><tr><td>Pendulum testers</td><td>Low Slip potential</td><td>-</td><td>Low Slip potential</td></tr><tr><td>ENV 12633-2006</td><td>-</td><td>-</td><td>3</td></tr><tr><td>Method of determination of unpolished and polished slip/skid resistance value</td><td></td><td></td><td></td></tr></table>		NAT.	LAPP.	BOCC. ANTISLIP 20MM	DIN 51130	R10	-	R11	DIN 51097	B (A+B)	-	C (A+B+C)	ANSI A 137.1- 2012	WET ≥ 0,50	-	WET ≥ 0,65	DCOF (Section 9.6)	≥ 0,40	-	≥ 0,40	B.C.R.A.	P2	-	P4	AS 4586: 2013	P2	-	P4	Slip resistance classification of new pedestrian surface materials				BS 7976-2: 2002	> 36	-	> 36	Pendulum testers	Low Slip potential	-	Low Slip potential	ENV 12633-2006	-	-	3	Method of determination of unpolished and polished slip/skid resistance value			
	NAT.	LAPP.	BOCC. ANTISLIP 20MM																																																
DIN 51130	R10	-	R11																																																
DIN 51097	B (A+B)	-	C (A+B+C)																																																
ANSI A 137.1- 2012	WET ≥ 0,50	-	WET ≥ 0,65																																																
DCOF (Section 9.6)	≥ 0,40	-	≥ 0,40																																																
B.C.R.A.	P2	-	P4																																																
AS 4586: 2013	P2	-	P4																																																
Slip resistance classification of new pedestrian surface materials																																																			
BS 7976-2: 2002	> 36	-	> 36																																																
Pendulum testers	Low Slip potential	-	Low Slip potential																																																
ENV 12633-2006	-	-	3																																																
Method of determination of unpolished and polished slip/skid resistance value																																																			

Per maggiori chiarimenti sui dati tecnici e sulla garanzia consultare il catalogo generale in vigore. - For further information on technical specifications, please consult our up-dated general catalogue. - Pour toutes informations supplémentaires sur les données techniques et sur les garanties, veuillez consulter le catalogue général en vigueur. - Für weitere Informationen über technische Daten und Garantie beziehen Sie sich bitte auf den aktuellen Gesamtkatalog. - Para ultteriores informaciones sobre los datos técnicos y la garantía, vease el catalogo general en vigor. - Более подробную информацию о технических данных и гарантии смотрите в действующем сборном каталог.



Formato Size Format Format Tamaño формат cm	Spessore Thickness Épaisseur Stärke Espesor Толщина mm	Pz. x Mq. Pieces x Sqm Pcs / M ² Stk. x Qm Pzs x Mc. Шт x Кв.М.	Pz. x Scat. Pieces x Box Pcs / Bte Stk. x Krt. Pzs x Caja Шт x Кор.	Mq. x Scat. Sqm x Box M ² / Bte Qm x Krt. Mc. x Caja Кв.М. x Кор.	Peso x Scat. Weight x Box Poids / Bte Gewicht x Krt. Peso x Caja Bec x Kor. Kg.	Scat. x Pal. Boxes x Pal. Bte / Pal. Krt. x Pal. Cajas x Pal. Kop. x Подд.	Mq. x Pal. Sqm x Pal. M ² / Pal. Qm x Pal. Mc. x Pal. Кв.М x Подд.	Peso x Pal. Weight x Pal. Poids / Pal. Gewicht x Pal. Peso x Pal. Bec x Подд. Kg.
100x100 Naturale - Lappato	10	1	1	1,000	23,28	32	32,00	745
80x80 Nat. - Lapp. - Bocciaurato	10	1,56	2	1,280	30,41	42	53,76	1277
60x120 Naturale - Lappato	10	1,39	2	1,440	33,63	36	51,84	1211
60x60 Naturale - Lappato	10	2,78	3	1,080	24,87	40	43,20	995
60x60 Naturale 20MM	20	2,78	2	0,720	32,49	32	23,04	1040
30x60 Naturale - Lappato	10	5,56	6	1,080	25,07	40	43,20	1003
30x30 Mosaici	10	11,11	5	0,450	10,90	60	27,00	654



BIANCO +3

colours / sizes - couleurs / formats - farben / formate - colores / tamaños - цвета / форматы

colori/formati

Si consiglia la posa con fuga 2 mm.
Laying with a 2 mm-joint is recommended.
Pose recommandée avec joints de 2 mm.
Es wird eine Fugenbreite von 2 mm empfohlen.
Se recomienda la colocación con juntas de 2 mm.
Рекомендуется укладка с швом 2 мм.



100x100 - 39 3/8" x 39 3/8"

E36K Bianco Nat. Rett.
E3DK Sabbia Lapp. Rett.


● 82
● 87



80x80 - 31 1/2" x 31 1/2"

E36X Bianco Nat. Rett. U_PP₄E₃C₂
E3E0 Bianco Lapp. Rett.

● 79B
● 81

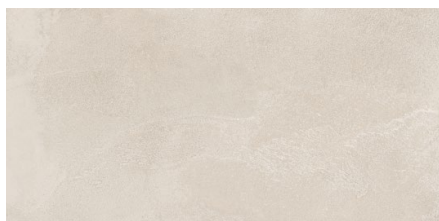

60x120 - 23 5/8" x 47 1/4"

E7R5 Bianco Nat. Rett. U_PP₄E₃C₂
E7T1 Bianco Lapp. Rett.


● 79B
● 83



60x60 - 23 5/8" x 23 5/8"

E36T Bianco
Nat. Rett. U_PP₄E₃C₂
E3J2 Bianco
Lapp. Rett.

● 71
● 77




30x60 - 11 3/8" x 23 5/8"

E3JE Bianco
Nat. Rett. U_PP₄E₃C₂
E3JD Bianco
Lapp. Rett.

● 71
● 77

Antislip



80x80 - 31 1/2" x 31 1/2"

E371 Bianco Boccia data

● 79B

SABBIA +3

colours / sizes - couleurs / formats - farben / formate - colores / tamaños - цвета / форматы

colori/formati

Si consiglia la posa con fuga 2 mm.
Laying with a 2 mm-joint is recommended.
Pose recommandée avec joints de 2 mm.
Es wird eine Fugenbreite von 2 mm empfohlen.
Se recomienda la colocación con juntas de 2 mm.
Рекомендуется укладка с швом 2 мм.



100x100 - 39 3/8" x 39 3/8"

E36L Sabbia Nat. Rett.
E3DK Sabbia Lapp. Rett.


● 82
● 87



80x80 - 31 1/2" x 31 1/2"

E36Y Sabbia Nat. Rett. U_PP₄E₃C₂
E3E1 Sabbia Lapp. Rett.

● 79B
● 81

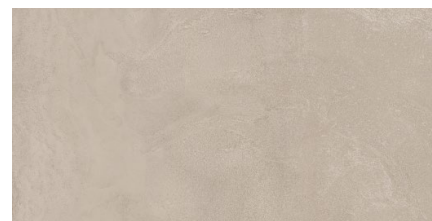

60x120 - 23 5/8" x 47 1/4"

E7R6 Sabbia Nat. Rett. U_PP₄E₃C₂
E7T2 Sabbia Lapp. Rett.

● 79B
● 83



60x60 - 23 5/8" x 23 5/8"

E36U Sabbia
Nat. Rett. U_PP₄E₃C₂
E3J4 Sabbia
Lapp. Rett.

● 71
● 77




30x60 - 11 3/8" x 23 5/8"

E3JG Sabbia
Nat. Rett. U_PP₄E₃C₂
E3JF Sabbia
Lapp. Rett.

● 71
● 77

Antislip



80x80 - 31 1/2" x 31 1/2"

E372 Sabbia Boccia data

● 79B

TORTORA +3

colours / sizes - couleurs / formats - farben / formate - colores / tamaños - цвета / форматы

colori/formati

Si consiglia la posa con fuga 2 mm.
Laying with a 2 mm-joint is recommended.
Pose recommandée avec joints de 2 mm.
Es wird eine Fugenbreite von 2 mm empfohlen.
Se recomienda la colocación con juntas de 2 mm.
Рекомендуется укладка с швом 2 мм.



100x100 - 39^{3/8}"x39^{3/8}"

E36M Tortora Nat. Rett.
E3DL Tortora Lapp. Rett.

● 82
● 87



80x80 - 31^{1/2}"x31^{1/2}"

E36Z Tortora Nat. Rett. U_PE₃C₂
E3E2 Tortora Lapp. Rett.

● 79B
● 81



60x120 - 23^{5/8}"x47^{1/4}"

E7R7 Tortora Nat. Rett. U_PE₃C₂
E7T3 Tortora Lapp. Rett.

● 79B
● 83



60x60 - 23^{5/8}"x23^{5/8}"

E36V Tortora
Nat. Rett. U_PE₄E₃C₂
E3J6 Tortora
Lapp. Rett.


● 71
● 77



30x60 - 11^{3/8}"x23^{5/8}"

E3JJ Tortora
Nat. Rett. U_PE₃C₂
E3JH Tortora
Lapp. Rett.

● 71
● 77



80x80 - 31^{1/2}"x31^{1/2}"

E373 Tortora Bocciaurato

● 79B

20MM



60x60 - 23^{5/8}"x23^{5/8}"

E482 Tortora Nat. Rett.

● 87

GRIGIO +3

colours / sizes - couleurs / formats - farben / formate - colores / tamaños - цвета / форматы

colori/formati

Si consiglia la posa con fuga 2 mm.
Laying with a 2 mm-joint is recommended.
Pose recommandée avec joints de 2 mm.
Es wird eine Fugenbreite von 2 mm empfohlen.
Se recomienda la colocación con juntas de 2 mm.
Рекомендуется укладка с швом 2 мм.



100x100 - 39^{3/8}"x39^{3/8}"

E36N Grigio Nat. Rett.
E3DM Grigio Lapp. Rett.

● 82
● 87



80x80 - 31^{1/2}"x31^{1/2}"

E370 Grigio Nat. Rett. U_PE₃C₂
E3E3 Grigio Lapp. Rett.

● 79B
● 81



60x120 - 23^{5/8}"x47^{1/4}"

E7R8 Grigio Nat. Rett. U_PE₃C₂
E7T4 Grigio Lapp. Rett.

● 79B
● 83



60x60 - 23^{5/8}"x23^{5/8}"

E36W Grigio
Nat. Rett. U_PE₄E₃C₂
E3J8 Grigio
Lapp. Rett.


● 71
● 77



30x60 - 11^{3/8}"x23^{5/8}"

E3JL Grigio
Nat. Rett. U_PE₃C₂
E3JK Grigio
Lapp. Rett.

● 71
● 77



80x80 - 31^{1/2}"x31^{1/2}"

E374 Grigio Bocciaurato

● 79B

20MM



60x60 - 23^{5/8}"x23^{5/8}"

E483 Grigio Nat. Rett.

● 87

ANTRACITE +3

colours / sizes - couleurs / formats - farben / formate - colores / tamaños - цвета / форматы

colori/formati

Si consiglia la posa con fuga 2 mm.
Laying with a 2 mm-joint is recommended.
Pose recommandée avec joints de 2 mm.
Es wird eine Fugenbreite von 2 mm empfohlen.
Se recomienda la colocación con juntas de 2 mm.
Рекомендуется укладка с швом 2 мм.



100x100 - 39 1/8" x 39 3/8"

E42T Antracite Nat. Rett.
E42S Antracite Lapp. Rett.


● 82
● 87



80x80 - 31 1/2" x 31 1/2"

E436 Antracite Nat. Rett.
E435 Antracite Lapp. Rett.


● 79B
● 81

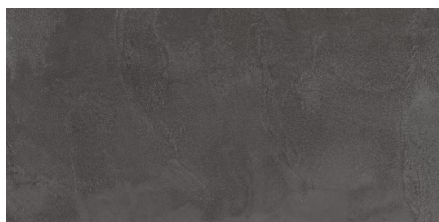

60x120 - 23 5/8" x 47 1/4"

E7W7 Antracite Nat. Rett.
E7W6 Antracite Lapp. Rett.

● 79B
● 83



60x60 - 23 5/8" x 23 5/8"

E430 Antracite Nat. Rett.
E42Z Antracite Lapp. Rett.

● 71
● 77




30x60 - 11 3/8" x 23 5/8"

E434 Antracite Nat. Rett.
E433 Antracite Lapp. Rett.

● 71
● 77

Antislip



80x80 - 31 1/2" x 31 1/2"

E437 Antracite Bocciardato

● 79B


+3

decors - decors - dekore - decorados - декоры

decori


MOSAICO 10X10*

Tessera - Chip 9,8x9,8 - 3 1/8" x 3 1/8"




30x30 - 11 3/8" x 11 3/8"

E3AZ Bianco Nat. ● 92




30x30 - 11 3/8" x 11 3/8"

E3C0 Sabbia Nat. ● 92



30x30 - 11 3/8" x 11 3/8"

E3C1 Tortora Nat. ● 92



30x30 - 11 3/8" x 11 3/8"

E3C2 Grigio Nat. ● 92




30x30 - 11 3/8" x 11 3/8"

E42V Antrac. Nat. ● 92


MOSAICO*

Tessera - Chip 2,8x2,8 - 1 1/8" x 1 1/8"



30x30 - 11 3/8" x 11 3/8"

E3AV Bianco Nat. ● 97



30x30 - 11 3/8" x 11 3/8"

E3AW Sabbia Nat. ● 97



30x30 - 11 3/8" x 11 3/8"

E3AX Tortora Nat. ● 97



30x30 - 11 3/8" x 11 3/8"

E3AY Grigio Nat. ● 97



30x30 - 11 3/8" x 11 3/8"

E42U Antrac. Nat. ● 97

* Su rete in fibra - On fibre mesh backing - Sur filet en fibre de verre - Auf Glasfasernetz - Sobre malla de fibra - На волоконной сетке