
John Richard

Assembly Instructions for Item#AJC-9159

Thank you for purchasing this quality product. Be sure to check all packing materials carefully for small parts that may have come loose inside the carton during shipment.
Carefully unpack and inspect each piece of your new chandelier. Do not discard any contents until after assembly is complete to avoid accidentally discarding small parts or hardware. To Prevent the Risk of Injury do not attempt to install this if any piece is missing or damaged.

IMPORTANT: FOR A SAFE AND SECURE INSTALLATION, THESE FIXTURES MUST BE INSTALLED BY MEANS OF SUPPORTS THAT ARE INDEPENDENT OF THE OUTLET BOX. WARNING: BE SURE THE ELECTRICITY TO THE WIRES YOU ARE WORKING ON IS SHUT OFF; EITHER THE FUSE IS REMOVED OR THE CIRCUIT BREAKER IS SHUT OFF.
This light fixture requires installation by a person familiar with the codes and restrictions in your area. We recommend installation by a licensed electrician.
***Caution: Please carefully read all instructions before starting the assembly process.
For your safety, two people are required for proper assembly and installation.
This fixture has been rated for up to Forty (40) 40-Watt maximum TYPE G9 bulbs (included).

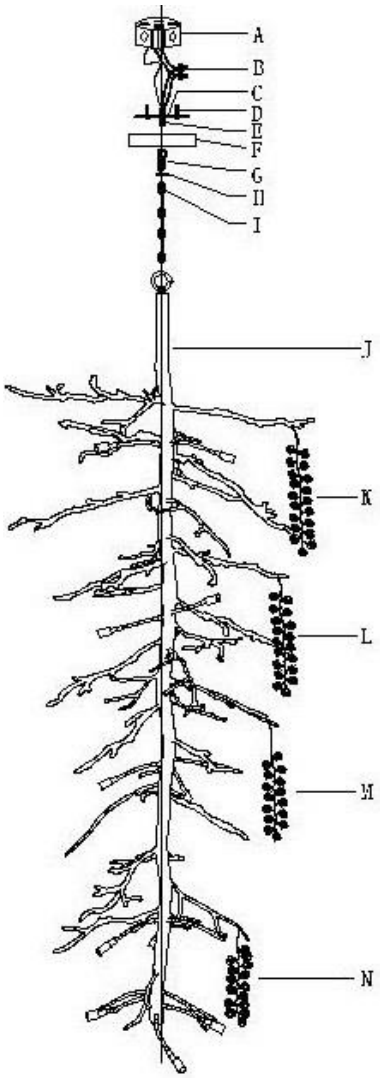

Assembly Steps:

1. Attach the Cross Bar (C) to the Outlet box (A) using the Outlet box Screws (D).
2. Please connect the wires and then cover the tie-in with the Wire nut (B).
3. The screw Collar (G) should be connected to the central Thread (E) of Cross bar, then attach the Canopy (F) underneath the celling with Round Ring (H). The Round Ring (H) must be connected to the Screw Collar (G) very tightly.
4. Please connect the chain (I) to the screw collar (G). Adjust the length of the chain to the link that best matches your desired length.
5. Please attach the body (J) to chain I).
6. Please hang glass droplet\strings (K, L, M) over the branches/body (J) as shown.

NOTE: DO NOT EXCEED RECOMMENDED WATTAGE.

K: 12PCS(28 PCS Beads)
L: 130PCS(26 PCS Beads)
M: 88PCS(22 PCS Beads)
N: 280PCS(18 PCS Beads)