

# 15000

## Universal Housing 5" Line Voltage

### Product Description

Suitable for new construction in residential and commercial applications. NON-IC. Insulation must be kept a minimum of 3" from housing.

#### Housing

Integral thermal protector guards against improper lamping and misuse of insulation materials. 7 1/2" height allows use in 2" x 8" joist construction.

#### Plaster Frame

Housing is secured to plaster frame with screws and can be removed for access to junction box. Housing adjusts from 1/2" to 1 1/2" to accommodate ceiling thickness.

#### Junction Box

Listed for through branch circuit wiring and includes several 3/4" knockouts. Four pry-outs with integral strain relief simplify Romex installation. Supplied with three IDEAL® push-in wire connectors.

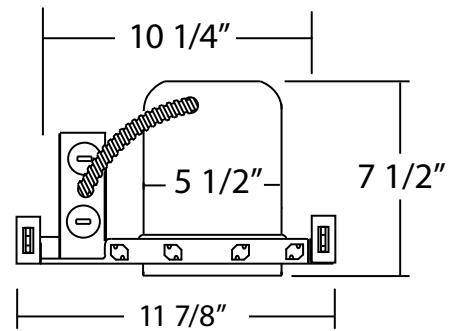
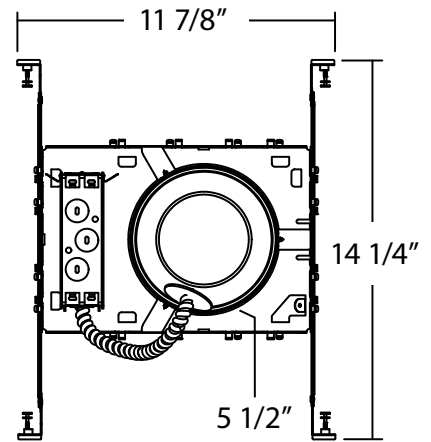
#### Installation

Heavy-gauge NICOR captive hanger bars provide greater stability, allowing housing to be positioned at any point within a 24" joist span, then locked in place with set screws. Unique hanger bar lip design helps align can to joist. Four double-headed captive nails provide for ease of installation. Bars can be repositioned 90° on plaster frame without tools. Bars fit onto T-bar spine for quick alignment and can be permanently secured. Score lines allow bars to be shortened without tools to accommodate a 12" joist span.



Project



Catalog



Type







**15000 | Universal Housing 5" Line Voltage**



<b>Fresnel Shower</b>		<b>Order No</b>	<b>Color</b>	<b>Maximum Lamp Rating</b>
 	15502	White	75W   BR30/PAR30 60W   A19 OD: 6 1/2" Wet Location Rated	

<b>Baffle</b>		<b>Order No</b>	<b>Color</b>	<b>Maximum Lamp Rating</b>
 	15504	Black	75W   BR30/PAR30 OD: 6 1/2"	

<b>Eyeball</b>		<b>Order No</b>	<b>Color</b>	<b>Maximum Lamp Rating</b>
 	15506BK	Black (shown)	75W   BR30/PAR30 OD: 6 1/2"	
	15506PB	Polished Brass		
	15506OB	Oil Rubbed Bronze		
	15506WH	White		

<b>Eyeball</b>		<b>Order No</b>	<b>Color</b>	<b>Maximum Lamp Rating</b>
 	15507BK	Black (shown)	50W   R20/PAR30 OD: 6 1/2"	
	15507PB	Polished Brass		
	15507WH	White		


<b>Shower Trim</b>		<b>Order No</b>	<b>Color</b>	<b>Maximum Lamp Rating</b>
 	15509	White (shown)	40W   A19 1x13W PL OD: 6 1/2" Wet Location Rated	
	15509OB	Oil-Rubbed Bronze		


<b>Splay</b>		<b>Order No</b>	<b>Color</b>	<b>Maximum Lamp Rating</b>
 	15510	White	75W   BR30/PAR30 OD: 6 1/2"	

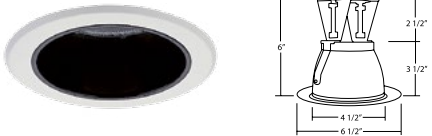
**15000 | Universal Housing 5" Line Voltage**

Baffle	Order No	Color	Maximum Lamp Rating
	15511BK	Black	75W   BR30/PAR30 OD: 6 1/2"
	15511BZ	Bronze (shown)	
	15511WH	White	
	15511NK	Nickel	
	15511OB-ABZ	Oil-Rubbed Bronze (aged bronze ring)	
	15511OB-OB	Oil-Rubbed Bronze (oil-rubbed bronze ring)	



Reflector	Order No	Color	Maximum Lamp Rating
	15518BK	Black	60W   A19 OD: 6 1/2"
	15518CL	Clear	
	15518GD	Gold (shown)	
	15518WH	White	
	15518WHZ-ABZ	Wheat Haze (aged bronze ring)	



Splay	Order No	Color	Maximum Lamp Rating
	15550	White	50W   R20/PAR20 OD: 6 1/2"



Cone	Order No	Color	Maximum Lamp Rating
	15552	White	75W   BR30/PAR30 OD: 6 1/2"

Cone	Order No	Color	Maximum Lamp Rating
	15553	Black	75W   BR30/PAR30 OD: 6 1/2"

**15000 | Universal Housing 5" Line Voltage**

Cone	Order No	Color	Maximum Lamp Rating
 	15554	Clear	75W   BR30/PAR30 OD: 6 1/2"

Cone	Order No	Color	Maximum Lamp Rating
 	15555	Gold	75W   BR30/PAR30 OD: 6 1/2"

Gimbal Ring	Order No	Color	Maximum Lamp Rating
 	15558BK	Black (shown)	75W   PAR30 OD: 6 1/2"
	15558WH	Clear	