



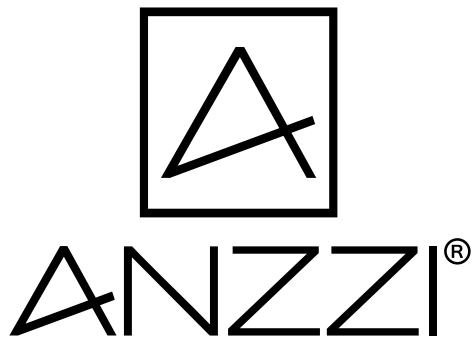

ANZZI STAINLESS STEEL UNDERMOUNT SINK
INSTALL & OPERATION MAUNAL

V1.1
08/25/2026

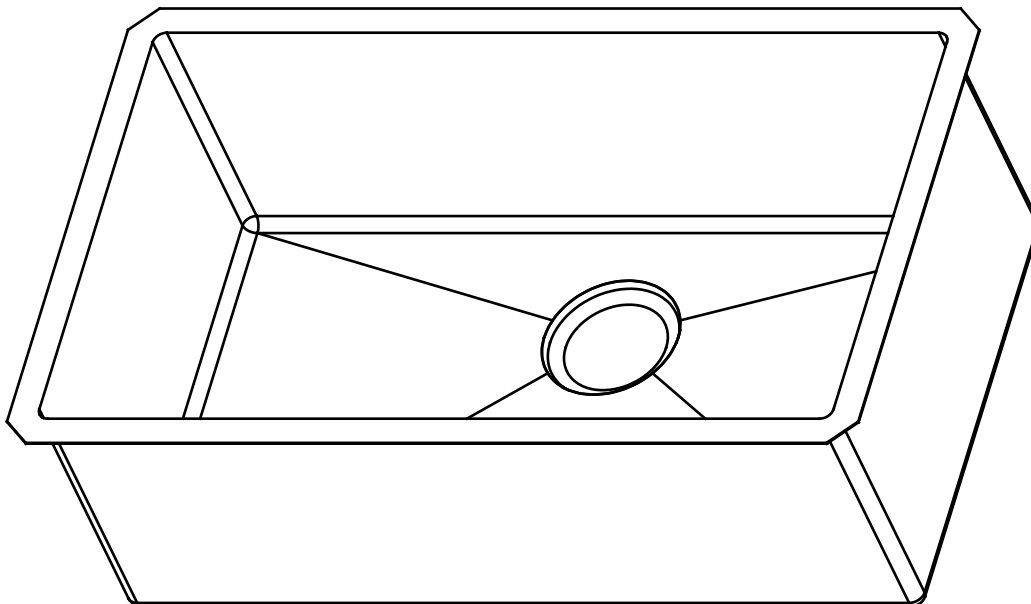

**DON'T WAIT!
REGISTER NOW!**

Register your product within 90 days to ensure it is recognized as a purchase and covered under warranty.

Register online at <https://anzzi.com/pages/register> or scan the QR code on PG. 2.



PRODUCT REGISTRATION*

IMPORTANT: Warranty will not be recognized unless product is registered.

Register online at <https://anzzi.com/pages/register> or Scan the QR code below.

Registering your product maximizes your warranty benefits and ensures prompt service and support.

1

USE YOUR PHONE CAMERA
TO SCAN THE QR CODE



2

FILL IN A QUICK
REGISTRATION FORM

Thank you for your purchase!

Registering your products ensures you maximize your warranty benefits and receive prompt service and support.

Name*

Email*

City*

Order #*

Installer Name

...

Model Purchased*


Installer Phone Number

Customer Age Range

Submit

3

CLICK SUBMIT AND
ENJOY PEACE OF MIND



Need help? For technical support call **305-363-4679** or visit us at www.ANZZI.com



CARE AND MAINTENANCE

ANZZI® products are crafted with superior quality standards and workmanship and are engineered to stand the test of time. However, that does not mean the product can be neglected and will need some care and cleaning.

It is recommended to use regular soap and hot water along with a non-abrasive cloth or sponge to regularly clean the product. This avoids any nasty build up or deposits which would be tougher to remove.

If you feel the use of stronger cleaning solutions or chemicals is necessary always test the cleaning solution or chemical on an inconspicuous area before applying to the entire surface.

Wipe all surfaces clean and rinse completely with water immediately after applying cleaner. Rinse and dry any overspray that lands on nearby surfaces.

DO NOT ALLOW THE CLEANER TO SOAK.

Following these simple principles will ensure you ANZZI® product will remain as lustrous and stunning as the day it was first received. ENJOY!

Sincerely,

La Familia ANZZI®

Perfection is our Tradition®

For more information visit us at www.ANZZI.com

Installation Instructions For Undermount Sink

Please carefully read complete instructions before beginning installation. these instructions are for installation with solid surface, composite material countertops.

ANZZI SINKS recommends professional countertop installers and is not responsible for damage to the countertop or sink during installation.

1. Unpack the new sink and check the contents of the materials supplied: Sink, Mounting Brackets ,strainer and Cutout template (depending on model).
2. Supplied cutout template provides follow options of installation:
 - A. Flush mount: Sink edge is flush with countertop opening.(FIGURE 1)
- 3.Cut out the appropriate template for your sink model and desired installation option. Place template in desired position on countertop , locating center of the bowl over cabinet and faucet holes .
- 4.Trace the outline of the template and cut countertop according to templated outline using appropriate cutting tools. Template is for guide only. Use physical sink to ensure accurate cutout opening .(FIGURE 2)
- 5.Locate the drill holes on the underside of the countertop, approximately 1"from edge of the sink to be installed. Holes should be evenly spaced approximately 6" to 8"apart starting from every corner as shown in(FIGURE 3). It is recommended to install a faucet at this point before installing the sink.

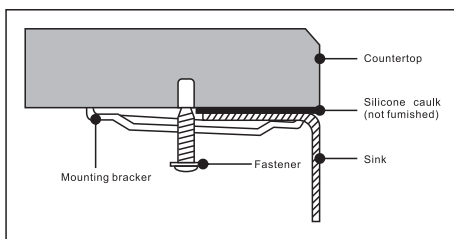


FIGURE 1

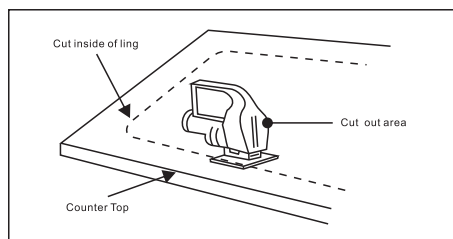


FIGURE 2

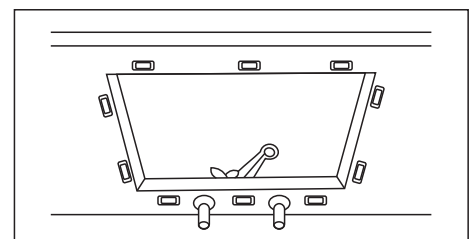


FIGURE 3

Installation Instructions For Undermount Sink

6. Loosely attach mounting brackets to the countertop, parallel to the cutout opening using the supplied mounting screws and nuts. Mounting screws with brass inserts with brass inserts are supplied with the sink, however, countertop material vary and the correct type of fasteners should be recommended by your installer or supplier.

7. Clean sink flange and underside of cutout area of countertop, making sure that the area is smooth and free of grease. Apply continuous bead of silicone caulk evenly on top of sink flange. (FIGURE 4)

8. Position and align sink over the countertop opening and press sink onto countertop. Turn bent end of mounting bracket to snug over the sink rim. (FIGURE 5)

9. Check alignment of sink again and tighten fasteners to secure sink.

10. Wipe away excess silicone caulk with damp cloth. Connect drain and water supply according to manufacturer's instruction. (FIGURE 6)

1. Bucket 2. Metal Strainer 3. Screw 4. Rubber seal 5. Rubber gasket 6. Main body

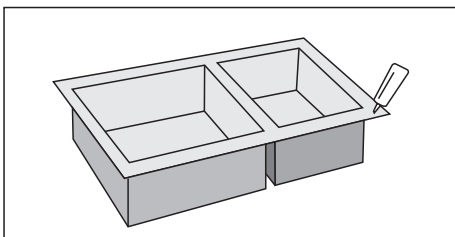


FIGURE 4

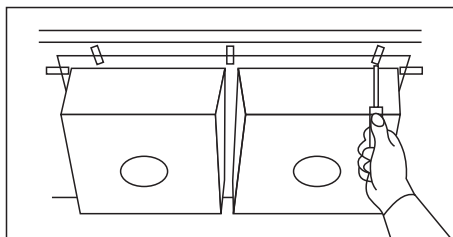


FIGURE 5

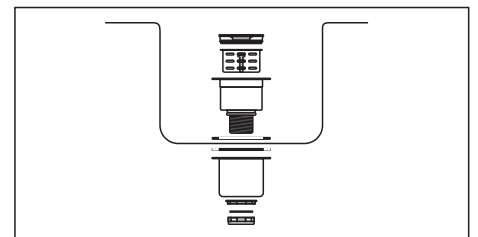


FIGURE 6

Basin Depth: 10 in

