
SYMMONS®

592SH7
7-Mode Round Showerhead
Specification Submittal

Location:



Model Numbers

☐ **592SH7**
7-Mode Round Showerhead

Modifications/Options

☐	**15** CG	1.5 gpm (5.7 L/min) flow rate restictor
☐	**BBZ**	Brushed Bronze Finish
☐	**MB**	Matte Black Finish
☐	**STN**	Satin Nickel Finish

Note: Append appropriate suffix to model number.

Feature Highlights

- Standard on the Elm collection.
- HydroMersion technology channels water for increased pressure and force.
- 7 modes, including Full, Massage, Waterfall, Spa, and Pause.
- Full mode offers firm, invigorating sprays.
- Massage mode provides pulse for muscle relief.
- Waterfall mode delivers a rich, unrestricted flow.
- Spa mode uses atomizing nozzles for an invigorating, restorative shower.
- Pause mode reduces flow to a trickle.
- Easy-shift thumb lever changes modes.
- Non-corrosive EverFlow rubber nozzles are easy to clean.
- Durable solid brass ball joint.
- 2.0 gpm (7.6 L/min) flow rate.

Compliance

- ASME® A112.18.1/CSA® B125.1.
- WaterSense® 2.0 gpm (7.6 L/min) and 1.5 gpm (5.7 L/min).
- 1.5 gpm option meets CALGreen requirements.


Warranty

Limited Lifetime - for residential installations.
10 Years - for commercial/industrial installations.
Refer to www.symmons.com/warranty for complete warranty information.

Architectural/Engineering Specification

Symmons 7-Mode Round Showerhead _____ Features include standard on the Elm collection, HydroMersion technology channels water for increased pressure and force, 7 modes, including Full, Massage, Waterfall, Spa, and Pause, full mode offers firm, invigorating sprays, massage mode provides pulse for muscle relief, waterfall mode delivers a rich, unrestricted flow, spa mode uses atomizing nozzles for an invigorating, restorative shower, pause mode reduces flow to a trickle, easy-shift thumb lever changes modes, non-corrosive EverFlow rubber nozzles are easy to clean, durable solid brass ball joint, 2.0 gpm (7.6 L/min) flow rate 10-Year Commercial Warranty. ASME A112.18.1/CSA B125.1 compliant. WaterSense 2.0 gpm (7.6 L/min) and 1.5 gpm (5.7 L/min). 1.5 gpm option meets CALGreen requirements. Available options: 15 = 1.5 gpm (5.7 L/min) flow restrictor, BBZ = Brushed Bronze finish, MB = Matte Black finish, and STN = Satin Nickel finish.

Dimensions

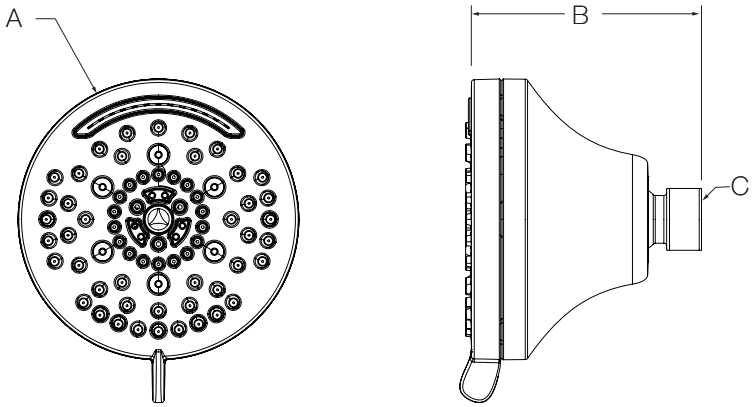

Measurements	
A	Ø 3-15/16", 100 mm
B	3-1/4", 82 mm
C	1/2" - 14 NPT

Note: Dimensions subject to change without notice.

Symmons Industries, Inc. ▪ 31 Brooks Drive ▪ Braintree, MA 02184 ▪ Phone: (800) 796-6667 ▪ Fax: (800) 961-9621
Copyright © 2026 Symmons Industries, Inc. ▪ symmons.com ▪ gethelp@symmons.com ▪ ZV-3946 REV B ▪ 081326