



Cursive

Wall Tile

Available Colors

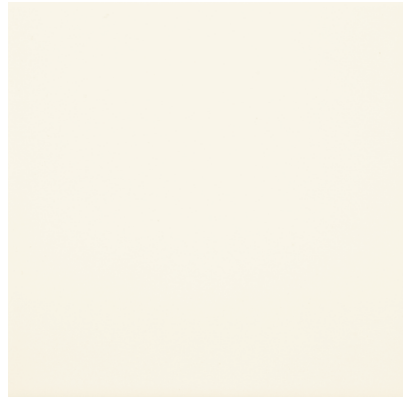

CRV01 ▶ Ghost

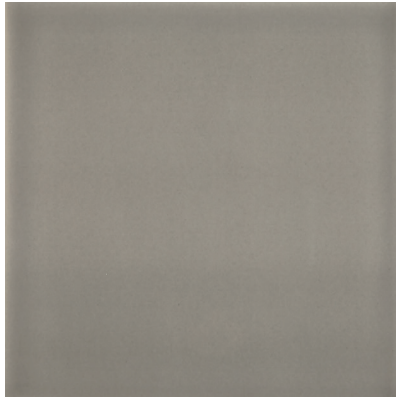

CRV02 ▶ Smoke



CRV03 ▶ Charcoal



CRV04 ▶ Soft Teal



CRV05 ▶ Old Denim



CRV06 ▶ Iris



CRV07 ▶ Rose Gold



CRV08 ▶ Goldenrod



CRV09 ▶ Oxblood

Features and Benefits


- Each tile has a handmade appearance with a watercolor effect around the edges. Nine trending colors
- Cursive is offered in 3"x6" and 3"x12" rectangles, 6" squares, 6" triangles, as well 4" circles, 2" demilunes and coordinating corner options
- A 1 ½" x 6" trim piece with finished edges on short and long sides complete the offering.
- Globally sourced



Cursive

Wall Tile

Sizes *shown in CRV07*

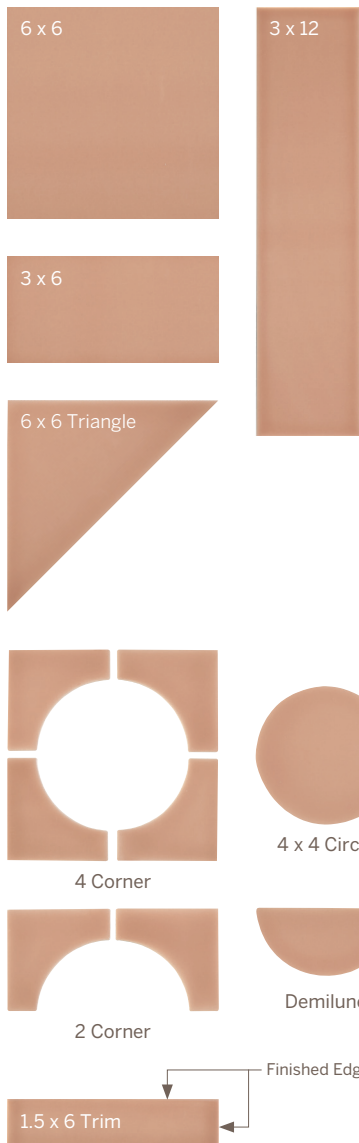

* Has finished edges on one 6" and 1-1/2" side

CRV04 ▶ Soft Teal 4-Corner, Triangle, 4 x 4 Circle and 3 x 6

CRV05 ▶ Old Denim 4-Corner, Triangle and 4 x 4 Circle,

Sizes* Field Tile

	Nominal Size (in)	Actual Size (in)	Thickness (in)	Finish
3 x 6	3 x 6	3 x 6	3/8	Gloss
3 x 12	3 x 12	3 x 12	3/8	Gloss
6 x 6	6 x 6	6 x 6	3/8	Gloss
Circle	4 x 4	4 x 4	3/8	Gloss
Demilune	2 x 4	2 x 4	3/8	Gloss
4-Corner	6 x 6	6 x 6	3/8	Gloss
2-Corner	3 x 6	3 x 6	3/8	Gloss
Triangle	6 x 6	6 x 6	3/8	Gloss

Crossville recommends an 1/8 inch - 1/4 inch grout joint.

Coordinating Trim*

Nominal (in)	Actual Size (in)	Thickness (in)	Finish
1-1/2 x 6*	1-3/8 x 6	3/8	Gloss

Crossville recommends an 1/8 inch - 1/4 inch grout joint.


* Has finished edges on one 6" and 1-1/2" side

Product Performance

Breaking Strength	>500 lbf	ASTM C648
Chemical Resistance	Unaffected	ASTM C650
Water Absorption	10-15%	ASTM C373
Scratch Hardness	6	Mohs Scale

Shade & Texture Index

Cursive has a shade variation of V3.

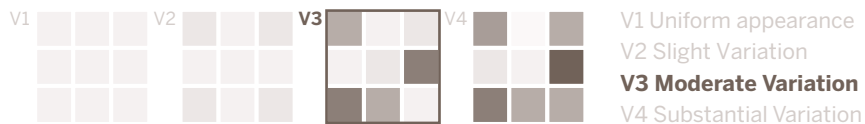

This tile product is produced with a V3 variation. Expect that the amount of color and texture on each piece may vary significantly. Inspect the product upon delivery and for best results, blend tile from several cartons during installation.



Cursive

Crossville, Inc.

PO Box 1168
Crossville, TN
38557

Phone 931.484.2110
Fax 931.456.2956
E-Mail Crossc@CrossvilleInc.com
Web CrossvilleInc.com

Recommended Use

Cursive tile is recommended for interior vertical surfaces in residential and commercial applications.

Care and Maintenance

Regular cleaning is the best way to keep Cursive tile looking good for years to come. Use clean, hot water (combined with a household cleaner for more aggressive cleaning). Rinse thoroughly and dry with a soft cloth to prevent water spots. No waxes or sealers are needed. More information regarding the care and maintenance of Crossville® products is available at CrossvilleInc.com.

Handcrafted Variations

Cursive tiles are manufactured to appear handmade. Due to this handmade appearance, variations in size, thickness, flatness and color are to be expected. Therefore, blending the tile before and during installation is recommended.

Our Warranty

Crossville Inc. guarantees that its products will meet or exceed the performance specifications outlined in ANSI A137.1- 2012 and in the performance data section of the Crossville, Inc. general product catalog. For complete details check our website at CrossvilleInc.com.

National Accounts

For over 20 years we have been offering Porcelain tile to commercial customers at National Accounts pricing programs with special discounts. The National Accounts department provides materials forecasting, sales support and samples.

Exterior Cladding

Crossville's Porcelain Stone® Exterior Cladding Systems are suitable for virtually any conventional masonry application. When used in conjunction with our exterior cladding systems, Crossville's Porcelain Stone offers clear advantages: decreased construction costs, less site disturbance, low-to-zero maintenance after installation, accelerated construction schedules and greater strength than traditional masonry.

►► Crossville® Sample Express

Complimentary Samples are available at CrossvilleInc.com/products/Cursive

Samples may also be ordered through customer service by email or phone.

Sample Fulfillment & Help Line

Samples@CrossvilleInc.com
1 800 221.9093

Loose Tile Samples for Architects & Designers

Loose Tile Samples

Sizes may vary depending on product series
Max. of 4 large field tile per order

Replacement Chips for PSS Rack

Max. of 5, 2 x 2 chips per color

Standard Shipping

UPS Ground

CRV02 ▶ Smoke 4 x 4 Circle

CRV03 ▶ Charcoal 4-Corner

CRV08 ▶ Goldenrod 4 x 4 Circle



Trade Organizations



Environmentally Aware

