


Hekman 79257B Office Chair

Tilt Mechanism Installation Instructions

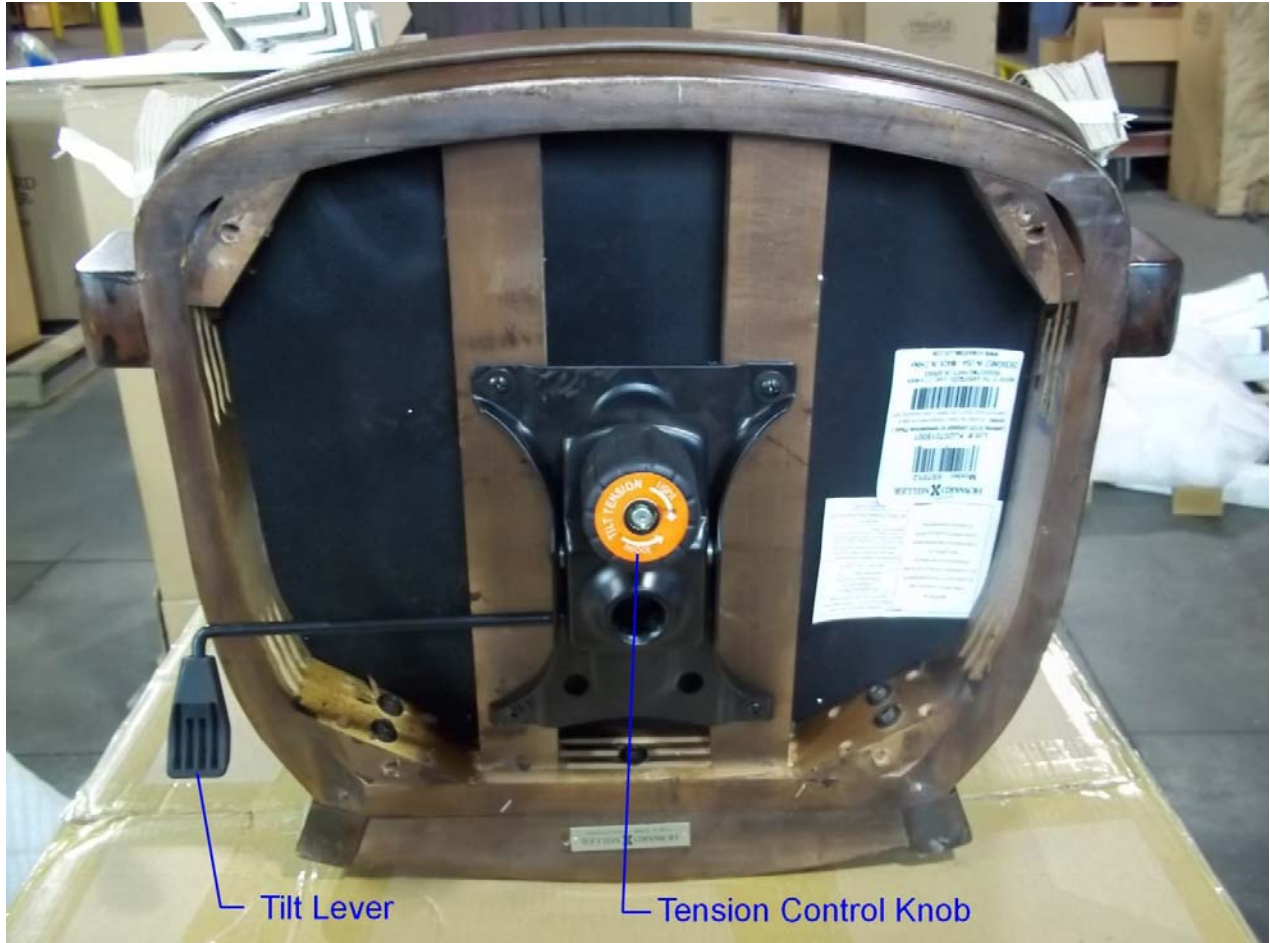

1. Locate the tilt mechanism which is packed underneath the seat in the carton.
2. Use the 4 bolts and 4 washers provided in the red hardware bag to install the mechanism to the bottom of the chair as shown.
3. Note that the tension control knob must be located towards the front of the chair as shown. The tilt lever will be on the right hand side when seated.