



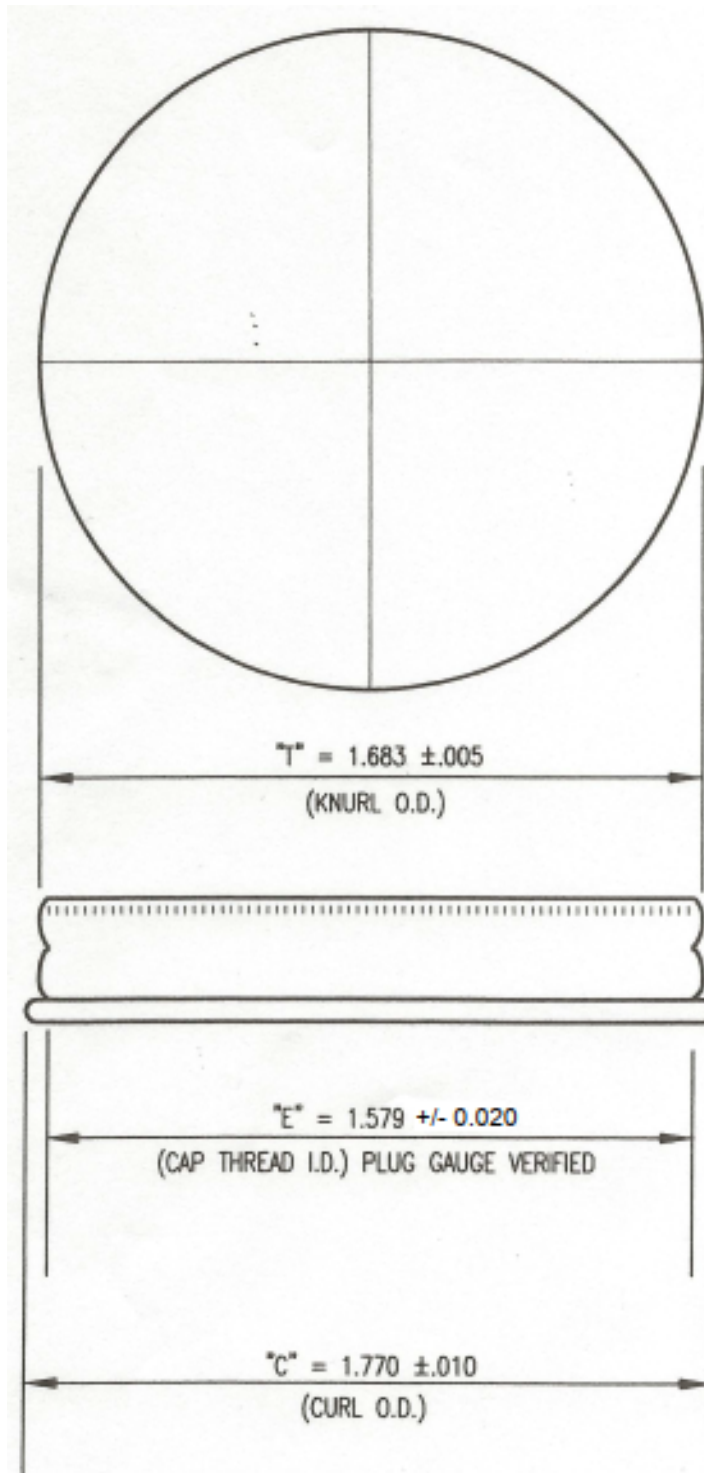

SIZE **43** MM CT SCREW CAP

METAL CLOSURE
CONTINUOUS THREAD DIMENSIONS

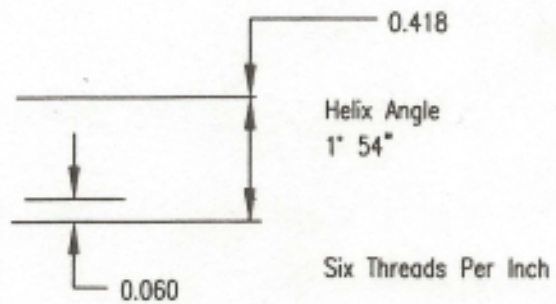

DISCLAIMER

THIS INFORMATION IS PROVIDED AS A GENERAL GUIDE, INCLUDING DIMENSIONS. IT IS THE CUSTOMER'S RESPONSIBILITIES TO SELECT THE PROPER CONTAINER FOR PRODUCT AND APPLICATION COMPATIBILITY.

DISTRIBUTED BY:



REF NO.:

DWG31434

DESCRIPTION:

43-400 Metal Screw Cap with HDPE 35P Liner


PRODUCT DATA SHEET

HDPE 35P

- Liner with a construction of pulp board, white paper and white pigmented High-Density Polyethylene (HDPE).
- Provides leak resistance, reseal and oxygen and moisture barrier.

Typical Product Attributes

Construction

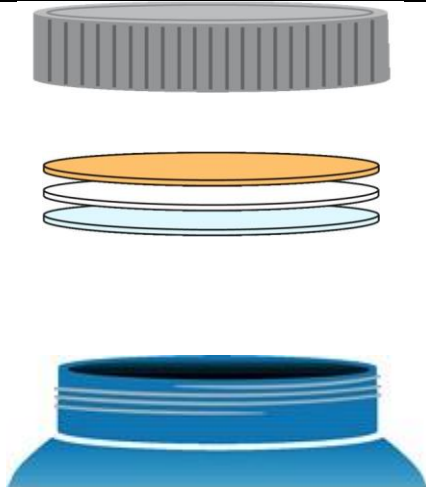Pulp Board White Paper		SI (µm)	US (Mils)
		889,0	35.0
White HDPE		63,5	2.5
		25,4	1.0
Thickness Tolerance		± 10%	± 10%
Minimum Width		25,4 mm	1.0 in
Width Tolerance		± 1,6 mm	± 0.0625 in

Properties

Oxygen Transmission (O ₂ TR)	350.0 cc / 100 in ² / 24 h @ 75°F, 50% RH
Water Vapor Transmission (WVTR)	1.0 g / 100 in ² / 24 h @ 100°F, 90% RH

Regulatory Compliance

FDA Compliance	21 CFR 177.1520 Olefin polymers.
	21 CFR 177.1210 Closures with sealing gaskets for food containers.
	21 CFR 176.180 Components of paper and paperboard in contact with dry foods.
	21 CFR 176.170 Components of paper and paperboard in contact with aqueous and fatty foods.
Drug Master File (DMF)	14762
Other Compliances	USFDA Food Allergen Guidelines California Proposition 65 Labeling Requirements Limitations of Heavy Metals in Packaging per CONEG & EU 94/62/EC, Article 11
Safety Data Sheet (SDS) Statement	Safety Data Sheets (SDS) are not required for articles as defined in 29 CFR 1910.1200, the OSHA Hazard Communication Standard (HazCom). This product is an article as defined by HazCom and is not considered to be, or to contain, a hazardous chemical based on evaluations made by our supplier.

Please note that construction does not reflect adhesive or resin bonding layers, if present.

DISCLAIMER

THIS INFORMATION IS PROVIDED AS A GENERAL GUIDE, INCLUDING DIMENSIONS. IT IS THE CUSTOMER'S RESPONSIBILITIES TO SELECT THE PROPER CONTAINER FOR PRODUCT AND APPLICATION COMPATIBILITY.