
Adelaide



Colors

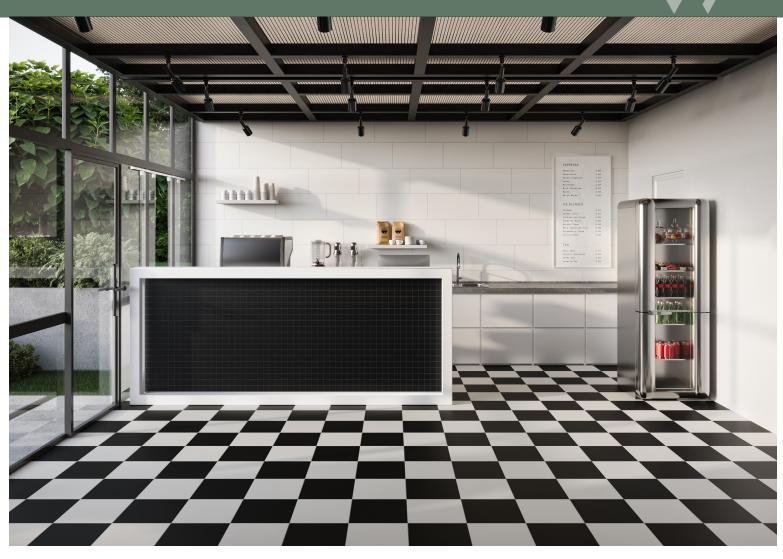

White VTL ADWH

Cream VTL ADCR



Light Gray VTL ADLG




Dark Gray VTL ADDG



VTL ADBL

Sizes



24" x 48" x 9.5mm Rectified



24" x 24" x 9.0mm and 8.5mm Rectified



12" x 24" x 9.0mm and 8.5mm Rectified



12" x 12" x 9.0mm and 8.5mm Rectified

<u>A D E L A I D E</u>

Field Tiles*

SIZE	ACTUAL	THICKNESS	FINISH
24" x 48" Rectified	23.62" x 47.24"	9.50mm	Matte & Polished
24" x 24" Rectified	23.62" x 23.62"	9.00mm	Matte & Polished
24" x 24" Rectified	23.62" x 23.62"	8.50mm	Polished
12" x 24" Rectified	11.73" x 23.62"	9.00mm	Matte & Polished
12" x 24" Rectified	11.73" x 23.62"	8.50mm	Polished
12" x 12" Rectified	11.73" x 11.73"	9.00mm	Matte
12" x 12" Rectified	11.73" x 11.73"	8.50mm	Polished

* Not all sizes/trims are available in all colors and finishes, scan QR code for product details.

Mosaics & Coordinating Trims*

SIZE	ACTUAL	FINISH
2" x 2" Mosaic	11.77" x 11.77"	Matte
3" x 24" Bullnose	2.91" x 23.62"	Matte & Polished

Recommended Grout Joint: 1/8" - Rectified 3/16" - Non Rectified

Product Characteristics

	MATTE	POLISHED
Breaking Strength (ASTM C648 or ISO 10545-4)	≥ 2200	≥ 2000
Chemical Resistance (ASTM C650 or ISO 10545-13)	N/A	N/A
DCOF	< 0.42	< 0.42
Deep Scratch Resistance - Unglazed (ISO 10545-6)	136	135
Frost Resistance (ASTM C1026 or ISO 10545-12)	Resistant	Resistant
Mohs Hardness - EN101	6	9
Water Absorption (ASTM C373 or ISO 10545-3)	N/A	N/A
Certifications	N/A	N/A
Country of Origin	India	India
Shade Variation Code	V1	V1

Application**

		WALL	FLOOR
Interior	Residential	•	•
Interior	Commercial	•	•
Interior	Heavy Commercial	•	
Exterior	Residential/Commercial		

^{**} These recommendations are not defined by ANSI Standards

Material

Glazed Porcelain (White only) Unglazed Through-Body Porcelain







Ready Ship





Request samples.









