


G 6334 BF Tile

OD: 63" x 34" x 78.75" ID: 60" x 30" Center Point Weight: 200 Load Factor: 2 Handed By: Center Drain or Seat L/R

This unit complies with ANSI Z124.2, ICC/ ANSI A117.1, ASTM F462, ASTM E84, UPC, HUD, ADA, ABA, SBCCI, NAHB, UFAS.

Warranty: Gelcoat models have a 3 year limited warranty. Acrylic models have a 5 year limited warranty. Pumps, parts, and accessories 1 year limited warranty. For further details please refer to the complete warranty section.

Due to the nature of the materials, dimensions may vary +/- 1/2".

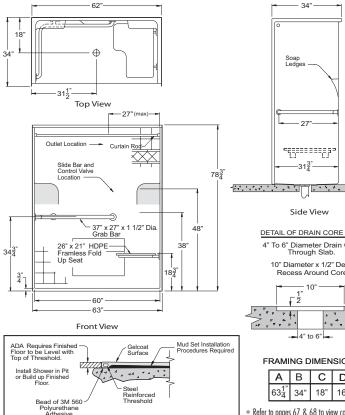

Photograph Illustrates Package One - Handed by Seat Left

 10" Diameter x .5" deep recess around drain core • Unit must be installed into a recessed pit or build up

finished floor to comply with ADA threshold guidelines.

PKG ONE - ADA/ANSI: G 6334 BF Tile • .75" No Recess BF Threshold • Mudset Handed by Seat L/R White Polyester Gelcoat Finish

Factory Installed Accessories (Valve not included):

- L-Bar 37" x 27" x 1.5" Smooth SS
 26" X 21" Frameless White HDPE Fold Up Seat
- 1" OD 18 Gauge SS Curtain Rod with Rod Cups

For ADA compliance with seat, installed accessories must include L-Bar, L-Seat, pressure balancing mixing valve, hand-held shower with slide bar (back wall, with in reach of seated user), vacuum breaker and 60" hose. Unit and accessories installed per ADA/ ANSI and Praxis Installation and warranty guidelines.

PKG TWO - ADA/ANSI: G 6334 BF Tile Mudset

- .75" No Recess BF Threshold
- Handed by Center Drain

White Polyester Gelcoat Finish

- Factory Installed Accessories (Valve not included): U-Bar 33.5" x 60.5" x 33.5" x 1.5" Smooth SS w/ Center Flange 1" OD 18 Gauge SS Grommet Style Curtain Rod

For ADA compliance less seat, installed accessories must include U-Bar, pressure balancing mixing valve, hand-held shower with slide bar (on any wall), vacuum breaker and 60" hose. Unit and accessories installed per ADA/ANSI and Praxis Installation and warranty quidelines.

14

BUILD TO ORDER BASE PLUS ACCESSORIES BASE UNIT 1: G 6334 BF Tile

- Specify Threshold Height Mudset
- Handed by Center Drain or Seat L/R
 Reinforced for Standard Accessories

BASE UNIT 2: G 6334 BF Tile EB

- .75" No Recess BF Threshold EasyBase[™]
- Handed by Center Drain or Seat L/R
 Reinforced for Standard Accessories

BASE UNIT OPTIONAL ACCESSORIES

Standard Finish - Polyester Gelcoat: White Bone Biscuit

Premium Finish - CenturyStone™ Solid Surface:

 Solid - White, Bone or Biscuit Natural - Granite Finishes

Grab Bars

Inside Curtain Line Seats (Revised ADA-ABA 2004)

- 26" x 21" Frameless White HDPE Seat
 26" x 21" Frameless White Padded Seat
- 26" x 21" Frameless Woodgrain Phenolic Seat

- 28.5" x 21" Frameless Woodgrain Phenolic Fold Up Seat

- ArmorShield P3 Protection
 Install 30" Slide Bar / HS Kit

- Nurse Call Box Drilling Specify Location
 1" OD 18 Gauge SS Curtain Rod with Rod Cups
- 1" OD 18 Gauge White Curtain Rod with Rod Cups
 Curtain Rod U-Cup Holder Pair

Field Installed Accessories (Shipped Loose)

- No Caulk Drain Chrome
- Semi-Permanent Threshold
- Collapsible Dam White 66"
- Caps for Collapsible Dam Pair
 Curtain Premium 66" x 72" White Nylon Weighted
 Curtain Heavy Duty 66" x 72" White Vinyl Weighted

rev 120811

DETAIL OF DRAIN CORE AREA 4" To 6" Diameter Drain Core Through Slab. 10" Diameter x 1/2" Deep Recess Around Core ١., FRAMING DIMENSIONS D 16 Bead of 3M 560 Polyurethane Adhesive Refer to pages 67 & 68 to view corresponding framing (or equal) Threshold Detail detail

HDPE (high density polyethylene) seats used by Praxis Companies, LLC contain recycled materials.

- Grab Bars S-Bar 24" x 1.5" Smooth SS S-Bar 24" x 1.25" Smooth White CC S-Bar 24" x 1.25" Peened SS L-Bar 37" x 27" x 1.5" Smooth SS L-Bar 37" x 27" x 1.25" Smooth White L-Bar 37" x 27" x 1.25" Peened SS U-Bar 27" x 60" x 27" x 1.5" Smooth SS w/ Center Flange U-Bar 27" x 60" x 27" x 1.25" Smooth White w/ Center Flange

- *Full Depth of Stall Seats (ADAAG 1991-2002)* 28.5" x 21" Frameless White HDPE Fold Up Seat 28.5" x 21" Frameless White Padded Fold Up Seat

Factory Modifications

- Valve Drilling Specify Hole Size
 .75" No Recess BF Threshold
- 2" BF Threshold
- Wood Reinforcement for HUD
- Full Wood Reinforcement

- Install SS Soap Dish Recessed
- Install Standard Symmons Valve Package