



XOU24BCGOA

24" ADA COMPLIANT UNDERCOUNTER REFRIGERATION

LIFESTYLE REFRIGERATION



XOU24BCGOA

- Fits US / European / ADA
- Articulating Hinge
- Handleless
- Adapts for European Toe Kicks/ Plinth


ACCOMMODATES: ADA HEIGHT | US STANDARD HEIGHT | EUROPEAN

Finally, a Beverage Center that fits virtually any 24" wide location. Whether ADA height or US Standard – American or European style cabinetry, XO has just the right unit. Frame the door to expose the Low-E glass window (optional Stainless Steel Door Kit available) And, your XO Beverage Center comes with clear glass shelves that fully extend while fully loaded enabling you to see everything.

Store up to 118 (12oz) cans – Ready to serve at 34° to 50° F and still find just what you are looking for.

WORLD CLASS SERVICE | COMPREHENSIVE WARRANTIES

OUR LASTING COMMITMENT TO YOU

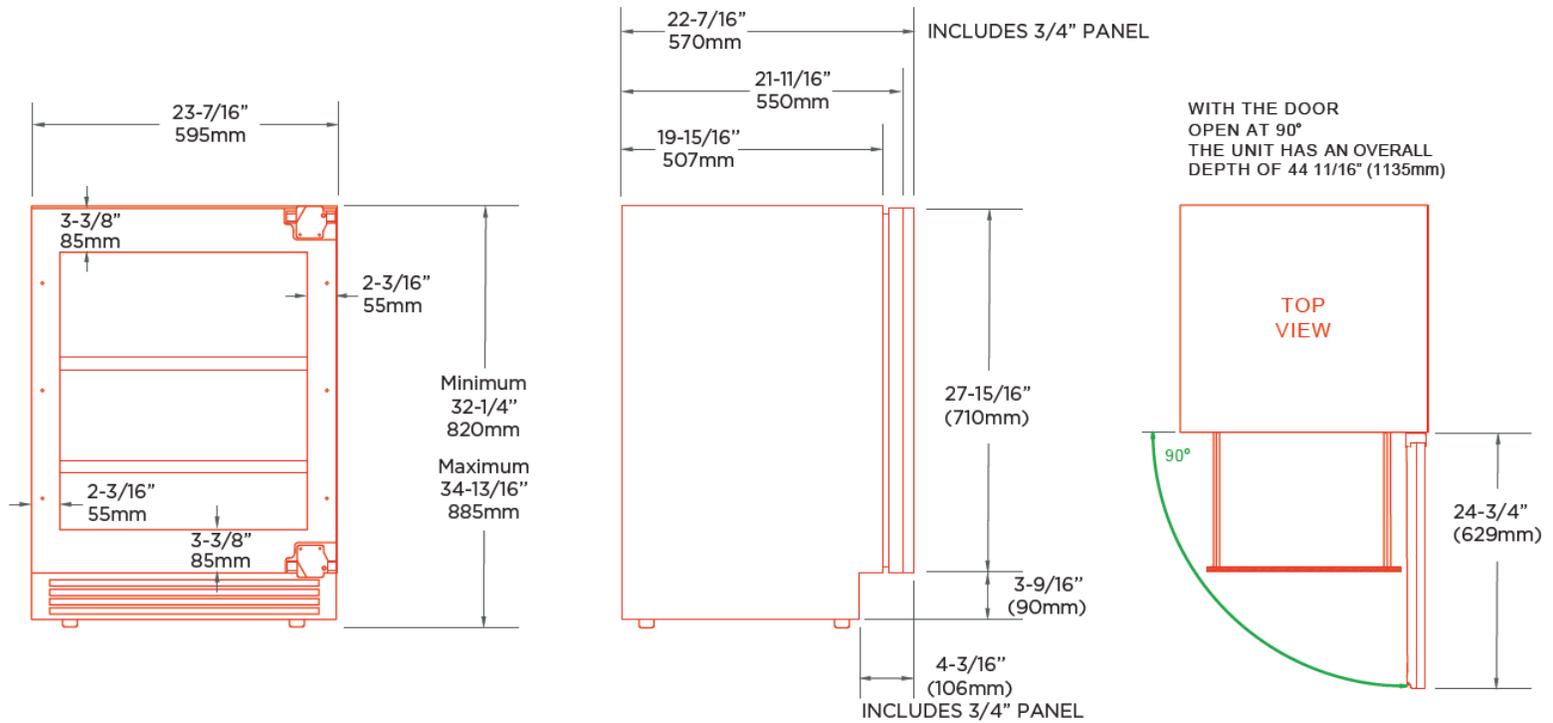

ROUGH IN

SPECIFICATIONS

CAPACITY

Full extension clear glass shelves hold 118 (12oz) cans at 41° to 50° F

FEATURES

- Fits US / European / ADA
- Articulating Hinge
- Handleless
- Adapts for European Toe Kicks/ Plinth
- Optional SS Panel for ADA Installations
- Shelves extend fully while loaded
- Tri-color LED interior lighting
- Holds up to 118 (12oz) cans
- Shelves adjust to 12 different positions
- Intuitive digital temperature control from 41° to 50°F
- Display as Framed Glass
- Flush installation design
- Energy-efficient Low-E Glass
- X-Active circulation removes odors and circulates air
- ENERGY STAR Certified Residential
- Designed for residential or commercial settings

ELECTRICAL

120V 60HZ 4.35 AMP*

DIMENSIONS

H 32 1/4" min - 34 13/16" max
W 23 7/8"
D 21 11/16" (w/o finish panel)

ROUGH IN

H 32 1/2" min
W 24"
D 24"

REFRIGERANT


R600A

OPTIONS


SS Door Panel for ADA Installs (includes 2 different style handles)
P/N: XOU24ADASG



ROUGH IN DIMENSIONS

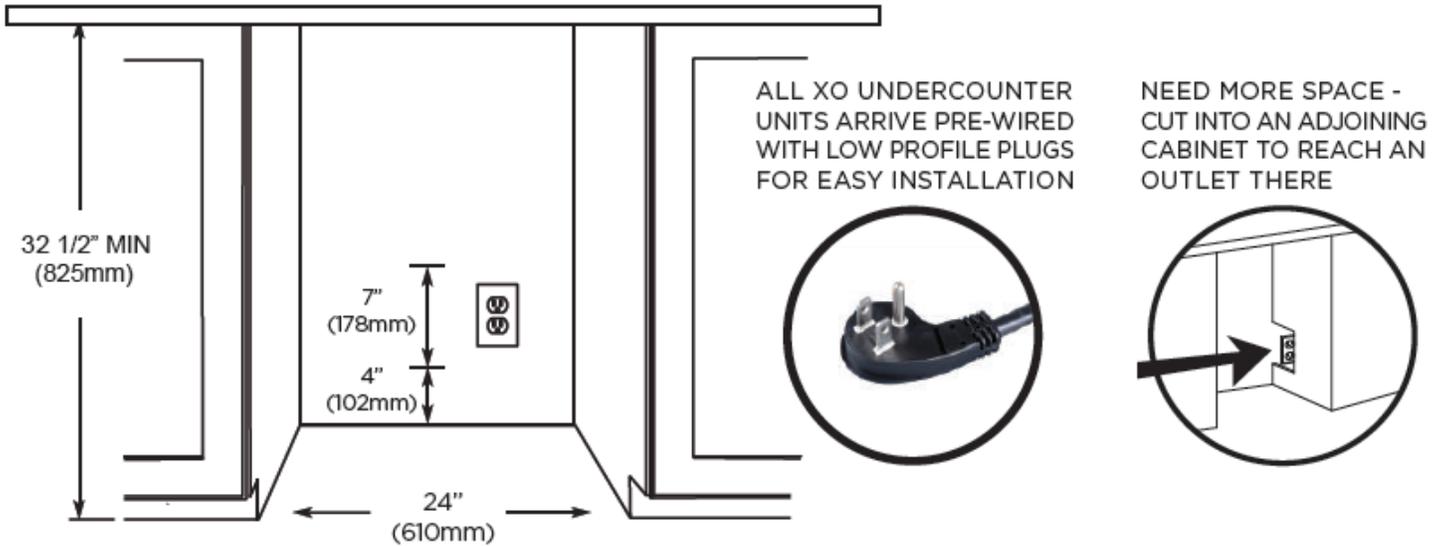


OVERLAY FRAME DIMENSIONS

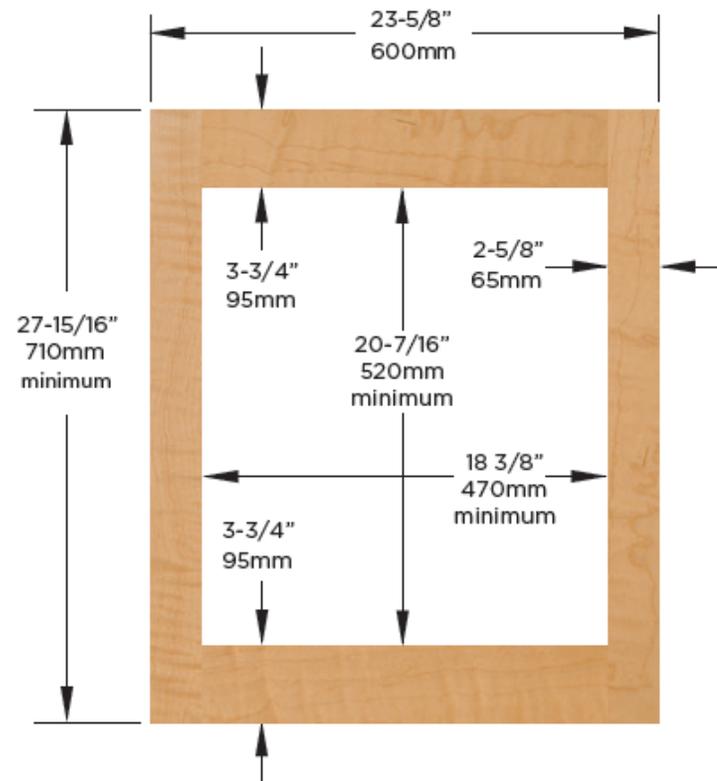

To conceal door completely observe the frame dimensions as minimums.

You can extend panel height but the gap between the bottom of the door and the floor must be at least 3" for ventilation.

To reduce possibility of warping - overlay frame should be finished on all sides.

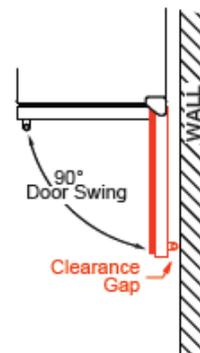

WHEN INSTALLING WITH THE HINGE SIDE NEXT TO A WALL - LEAVE ADEQUATE SPACE FOR CABINET HANDLES

DOOR MUST BE ABLE TO OPEN A MINIMUM OF 90°.


XO the next level in luxury appliances

xoappliance.com | 800.966.8300

THE DOOR STOP IS SET AT 110° BUT CAN BE RESET TO 90° OR 140°.

IF THE DOOR CANNOT OPEN FULLY YOU CANNOT EXTEND THE RACKS.


ROUGH IN DIMENSIONS

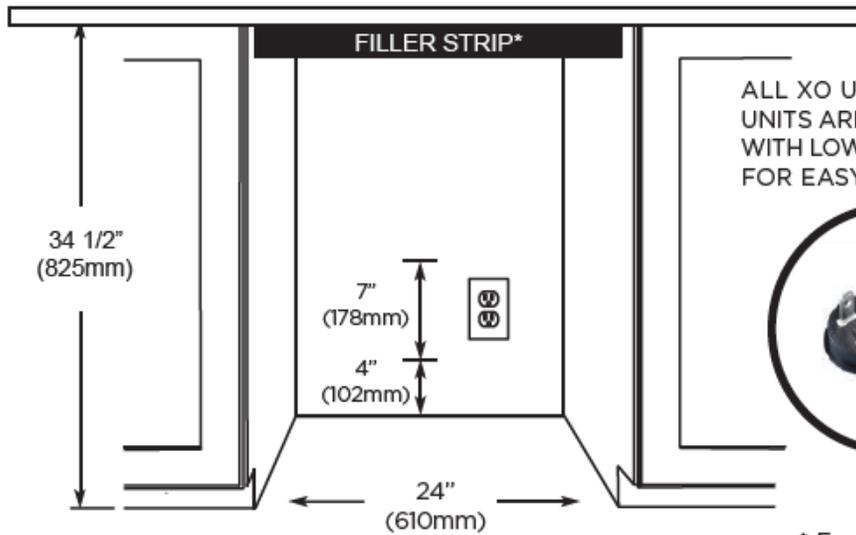

ALL XO UNDERCOUNTER UNITS ARRIVE PRE-WIRED WITH LOW PROFILE PLUGS FOR EASY INSTALLATION




NEED MORE SPACE - CUT INTO AN ADJOINING CABINET TO REACH AN OUTLET THERE

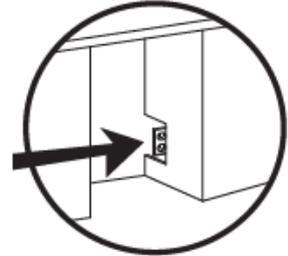

* For US cabinets, use a filler strip to close the gap above the unit behind the door (an ell bracket is included) For European cabinets with a 6" toekick, raise the unit by 2" using the leveling legs and install a custom plinth leaving an open space for ventilation (consult manual)

OVERLAY FRAME DIMENSIONS

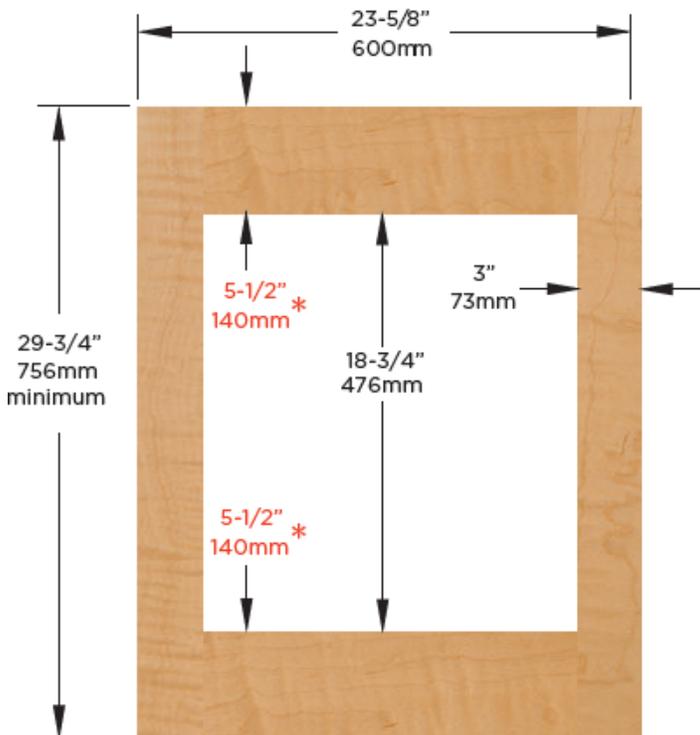


* Increase panel height by adding half the increase to both top and bottom. EX: for a 30" panel, increase 5-1/2" to 5-5/8"

To conceal door completely observe the frame dimensions as minimums.

You can change panel height but the gap between the bottom of the door and the floor must be at least 3" for ventilation.

To reduce possibility of warping - overlay frame should be finished on all sides.



WHEN INSTALLING WITH THE HINGE SIDE NEXT TO A WALL - LEAVE ADEQUATE SPACE FOR CABINET HANDLES

DOOR MUST BE ABLE TO OPEN A MINIMUM OF 90°.

XO the next level in luxury appliances

xoappliance.com | 800.966.8300

THE DOOR STOP IS SET AT 110° BUT CAN BE RESET TO 90° OR 140°.

IF THE DOOR CANNOT OPEN FULLY YOU CANNOT EXTEND THE RACKS.