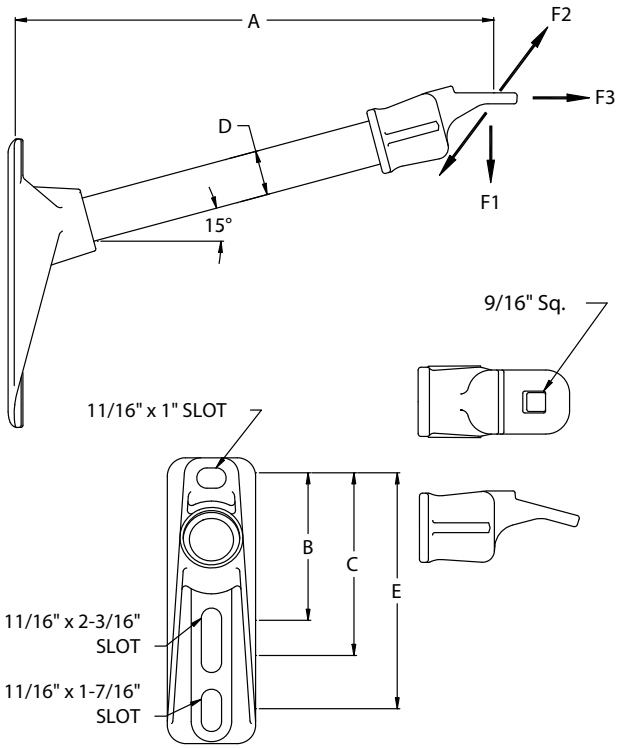


Single Phase Single Position

Features


- Accepts 5/8" mounting hardware
- Cleats to prevent bracket rotation on wood poles

Material

Base:	Ductile iron hot dip galvanized ASTM A-153
End Fitting:	Ductile iron hot dip galvanized ASTM A-153
Rod:	Fiberglass gray ultraviolet (UV) protective coating

Catalog Number	Dimensions (In)		Min Ultimate Load (Lbs)			Bolt Spacing (In)			Weight (Lbs)
	A	D	F1 Vert	F2 Long	F3 Trans	B	C	E	
G1MDA112DC	12	1.5	1800	1400	1500	5	6	8	6.8
G1MDA115DC	15	1.5	1500	1150	1500	5	6	8	7.2
G1MDA118DC	18	1.5	1200	900	1500	5	6	8	7.6
G1MDA124DC	24	1.5	900	700	1500	5	6	8	8.4

Notes:
1) Lengths shown are considered standard; for other lengths, consult factory
2) Add "SC" for silicone coated rod (harsh environments)
3) Add "B" for standard hardware (1/2" x 2" carriage bolt; 1/2" hex nut; 1/2" lock washer)
4) For other options, thread sizes, and optional base and end fittings, reference Fiberglass Catalog Numbering System Matrix

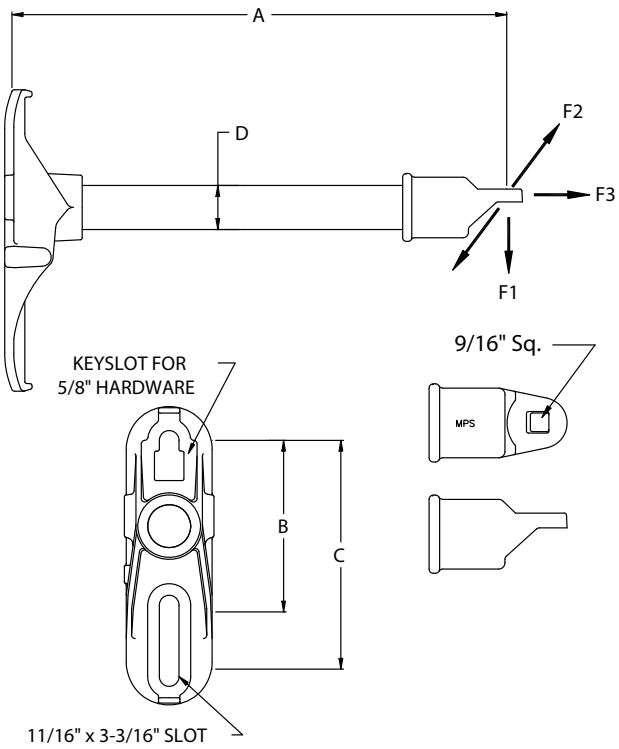

Single Phase Single Position

Features

- Accepts 5/8" mounting hardware
- Tab retainers for banding previsions
- Keyhole of installation ease on top bolt

Material


Base:	Aluminum A356-T6
End Fitting:	Ductile iron hot dip galvanized ASTM A-153
Rod:	Fiberglass gray ultraviolet (UV) protective coating

Catalog Number	Dimensions (In)		Min Ultimate Load (Lbs)			Bolt Spacing (In)		Weight (Lbs)
	A	D	F1 Vert	F2 Long	F3 Trans	B	C	
G1MA0112DC	12	1.5	1800	1500	1500	6	8	3.4
G1MA0115DC	15	1.5	1500	1350	1500	6	8	3.7
G1MA0118DC	18	1.5	1200	1150	1500	6	8	4.1

Notes:
1) Lengths shown are considered standard; for other lengths, consult factory
2) Add "SC" for silicone coated rod (harsh environments)
3) Add "B" for standard hardware (1/2" x 2" carriage bolt; 1/2" hex nut; 1/2" lock washer)
4) For other options, thread sizes, and optional base and end fittings, reference Fiberglass Catalog Numbering System Matrix

© Copyright 2010 MacLean Power Systems
Issued: May 2010
Supercedes: n/a

11411 Addison Avenue, Franklin Park, IL 60131
T: 847.455.0014 F: 847.455.0029
www.macleanpower.com

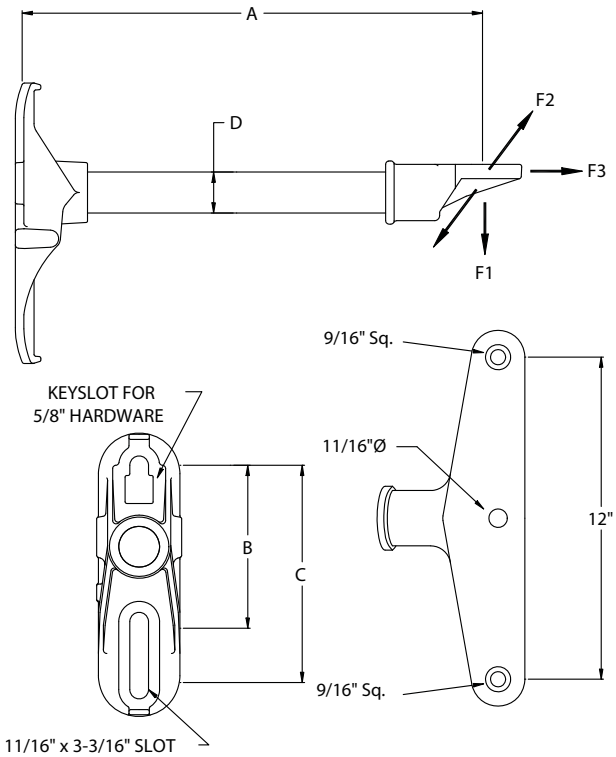

Single Phase Double Position

Features


- Accepts 5/8" mounting hardware
- Tab retainers for banding previsions
- Keyhole for installation ease on top bolt

Material

Base:	Aluminum A356-T6
End Fitting:	Ductile iron hot dip galvanized ASTM A-153
Rod:	Fiberglass gray ultraviolet (UV) protective coating

Catalog Number	Dimensions (In)		Min Ultimate Load (Lbs)			Bolt Spacing (In)		Weight (Lbs)
	A	D	F1 Vert	F2 Long	F3 Trans	B	C	
G1MA0112DD	12	1.5	1800	1400	10000	6	8	4.5
G1MA0115DD	15	1.5	1500	1150	10000	6	8	4.9
G1MA0118DD	18	1.5	1200	900	10000	6	8	5.3
G1MA0124DD	24	1.5	900	700	10000	6	8	6.0

Notes:
1) Lengths shown are considered standard; for other lengths, consult factory
2) Add "SC" for silicone coated rod (harsh environments)
3) Add "B" for standard hardware (1/2" x 2" carriage bolt; 1/2" hex nut; 1/2" lock washer)
4) For other options, thread sizes, and optional base and end fittings, reference Fiberglass Catalog Numbering System Matrix

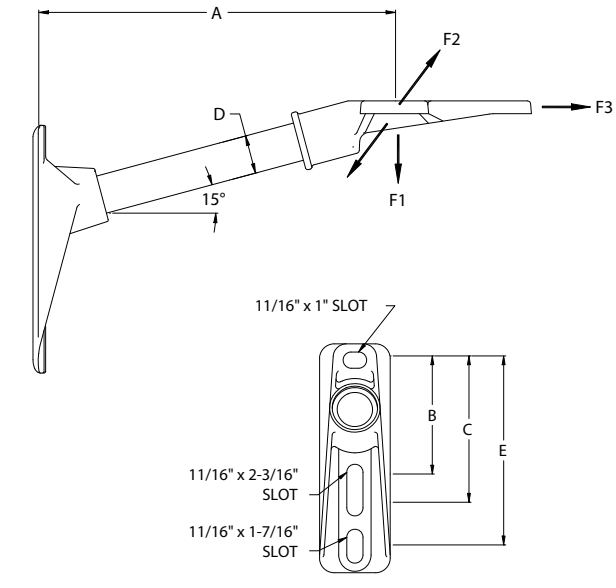

Single Phase Triple Position

Features

- Accepts 5/8" mounting hardware
- Cleats to prevent backet rotation on wood poles (1.5" only)
- Tab retainers for banding previsions (2" only)
- Recessed cavity in base to allow double nutting for back to back mounting (2" only)


Material

Base:	Ductile iron hot dip galvanized ASTM A-153
End Fitting:	Aluminum A356-T6
Rod:	Fiberglass gray ultraviolet (UV) protective coating

Catalog Number	Dimensions (In)		Min Ultimate Load (Lbs)			Bolt Spacing (In)			Weight (Lbs)
	A	D	F1 Vert	F2 Long	F3 Trans	B	C	E	
G1MDA112AT	12	1.5	1800	1400	10000	5	6	8	6.9
G1MDA118AT	18	1.5	1200	900	10000	5	6	8	7.6
G1MDA124AT	24	1.5	900	700	10000	5	6	8	8.4
G1HDA512AT	12	2.0	3000	1800	10000	8	10		12.2
G1HDA518AT	18	2.0	2250	1500	10000	8	10		13.6
G1HDA524AT	24	2.0	1750	1100	10000	8	10		15.0


Notes:
1) Lengths shown are considered standard; for other lengths, consult factory
2) Add "SC" for silicone coated rod (harsh environments)
3) Add "B" for standard hardware (1/2" x 2" carriage bolt; 1/2" hex nut; 1/2" lock washer)
4) For other options, thread sizes, and optional base and end fittings, reference Fiberglass Catalog Numbering System Matrix
5) For end fitting style "G", replace fitting specification "T" (e.g. G1MDA112AG) - available for 1.5" diameter only

STYLE - T




STYLE - G

SEE NOTE 5.



© Copyright 2010 MacLean Power Systems
Issued: May 2010
Supercedes: n/a

11411 Addison Avenue, Franklin Park, IL 60131
T: 847.455.0014 F: 847.455.0029
www.macleanpower.com

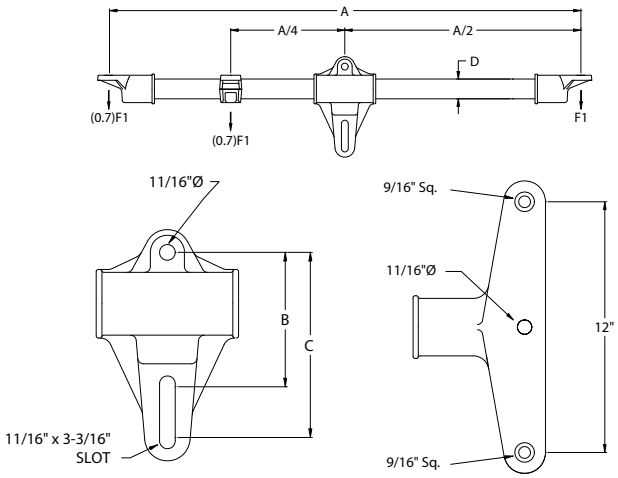

Two Phase Double Position

Features


- Accepts 5/8" mounting hardware

Material

Base:	Aluminum A356-T6
End Fitting:	Ductile iron hot dip galvanized ASTM A-153
Rod:	Fiberglass gray ultraviolet (UV) protective coating

Catalog Number	Dimensions (In)		Min Ultimate Load (Lbs)			Bolt Spacing (In)		Weight (Lbs)
	A	D	F1 Vert	F2 Long	F3 Trans	B	C	
G2HA0160AD	60	2.0	1300			6	8	20.2
G2HA0172AD	72	2.0	1100			6	8	22.9

Notes:
1) Lengths shown are considered standard; for other lengths, consult factory
2) Add "SC" for silicone coated rod (harsh environments)
3) Add "B" for standard hardware (1/2" x 2" carriage bolt; 1/2" hex nut; 1/2" lock washer)
4) For other options, thread sizes, and optional base and end fittings, reference Fiberglass Catalog Numbering System Matrix

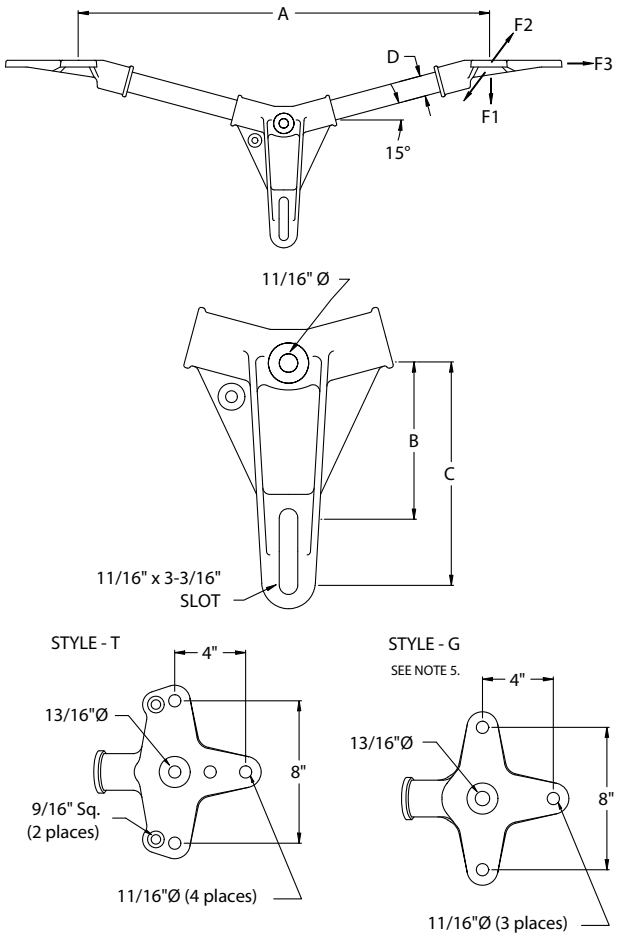

Two Phase Triple Position

Features

- Accepts 5/8" mounting hardware
- Recessed cavity in base to allow double nutting for back to back mounting

Material


Base:	Aluminum A356-T6
End Fitting:	Aluminum A356-T6
Rod:	Fiberglass gray ultraviolet (UV) protective coating

Catalog Number	Dimensions (In)		Min Ultimate Load (Lbs)			Bolt Spacing (In)		Weight (Lbs)
	A	D	F1 Vert	F2 Long	F3 Trans	B	C	
G2MAA148AT	48	1.5	900	700	10000	6	8	11.7
G2HAA348AT	48	2.0	1650	1100	10000	8	10	18.7

Notes:
1) Lengths shown are considered standard; for other lengths, consult factory
2) Add "SC" for silicone coated rod (harsh environments)
3) Add "B" for standard hardware (1/2" x 2" carriage bolt; 1/2" hex nut; 1/2" lock washer)
4) For other options, thread sizes, and optional base and end fittings, reference Fiberglass Catalog Numbering System Matrix
5) For end fitting style "G", replace fitting specification "T" (e.g. G2MAA148AG) - available for 1.5" diameter only

© Copyright 2010 MacLean Power Systems
Issued: May 2010
Supercedes: n/a

11411 Addison Avenue, Franklin Park, IL 60131
T: 847.455.0014 F: 847.455.0029
www.macleanpower.com

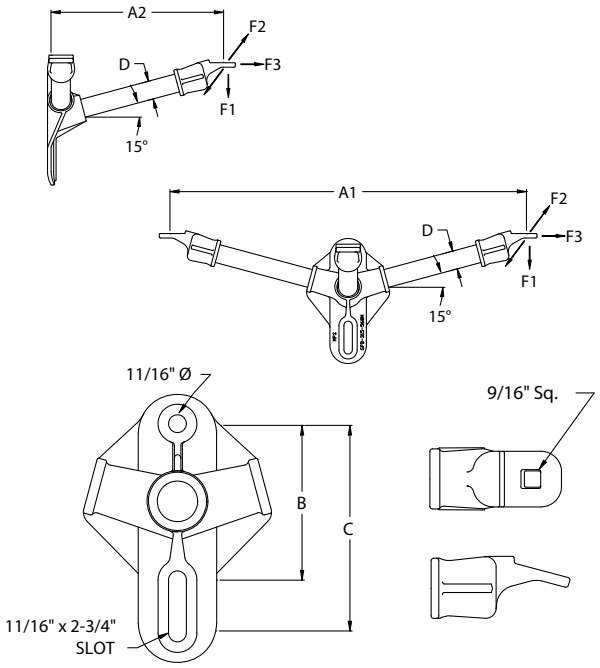

Three Phase Single Position

Features


• Accepts 5/8" mounting hardware

Material

Base:	Aluminum A356-T6
End Fitting:	Ductile iron hot dip galvanized ASTM A-153
Rod:	Fiberglass gray ultraviolet (UV) protective coating

Catalog Number	Dimensions (In)			Min Ultimate Load (Lbs)			Bolt Spacing (In)		Weight (Lbs)
	A1	A2	D	F1 Vert	F2 Long	F3 Trans	B	C	
G3MAA13613DC	36	13	1.5	1200	900	1500	6	8	13.2
G3MAA14813DC	48	13	1.5	900	700	1500	6	8	14.7

Notes:
1) Lengths shown are considered standard; for other lengths, consult factory
2) Add "SC" for silicone coated rod (harsh environments)
3) Add "B" for standard hardware (1/2" x 2" carriage bolt; 1/2" hex nut; 1/2" lock washer)
4) For other options, thread sizes, and optional base and end fittings, reference Fiberglass Catalog Numbering System Matrix

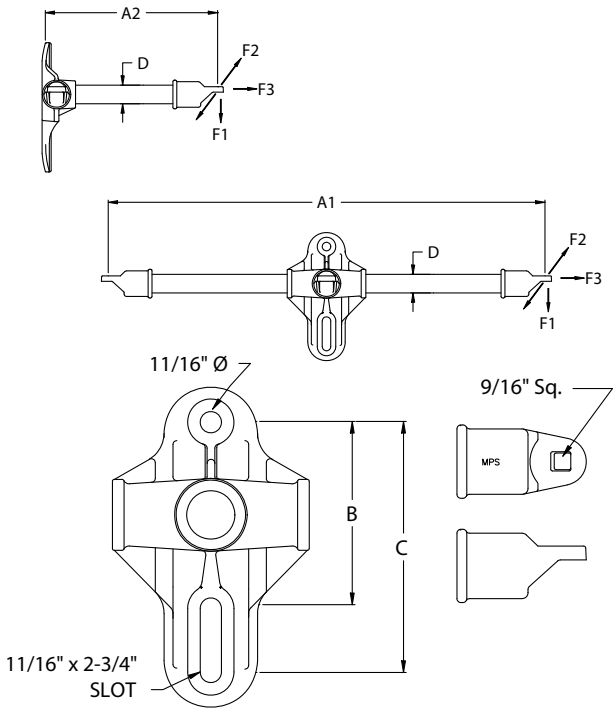

Three Phase Single Position

Features

• Accepts 5/8" mounting hardware

Material


Base:	Aluminum A356-T6
End Fitting:	Ductile iron hot dip galvanized ASTM A-153
Rod:	Fiberglass gray ultraviolet (UV) protective coating

Catalog Number	Dimensions (In)			Min Ultimate Load (Lbs)			Bolt Spacing (In)		Weight (Lbs)
	A1	A2	D	F1 Vert	F2 Long	F3 Trans	B	C	
G3MA013613DC	36	13	1.5	1200	900	1500	6	8	8.9
G3MA014813DC	48	13	1.5	900	700	1500	6	8	10.3
G3MA014818DC	48	18	1.5	900	700	1500	6	8	11.0

Notes:
1) Lengths shown are considered standard; for other lengths, consult factory
2) Add "SC" for silicone coated rod (harsh environments)
3) Add "B" for standard hardware (1/2" x 2" carriage bolt; 1/2" hex nut; 1/2" lock washer)
4) For other options, thread sizes, and optional base and end fittings, reference Fiberglass Catalog Numbering System Matrix

© Copyright 2010 MacLean Power Systems
Issued: May 2010
Supercedes: n/a

11411 Addison Avenue, Franklin Park, IL 60131
T: 847.455.0014 F: 847.455.0029
www.macleanpower.com

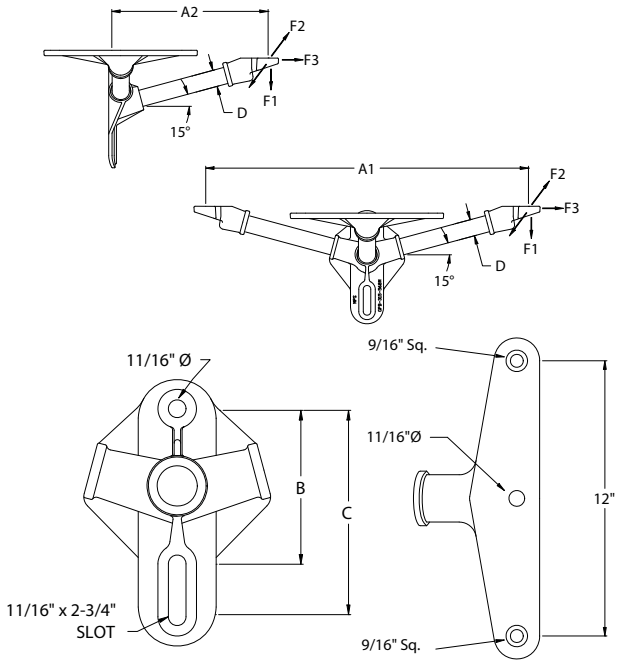

Three Phase Double Position

Features


- Accepts 5/8" mounting hardware
- Recessed cavity in base to allow double nutting for back to back mounting (2" only)
- Keyhole for installation ease on top bolt (2" only)

Material

Base:	Aluminum A356-T6
End Fitting:	Aluminum A356-T6
Rod:	Fiberglass gray ultraviolet (UV) protective coating

Catalog Number	Dimensions (In)			Min Ultimate Load (Lbs)			Bolt Spacing (In)		Weight (Lbs)
	A1	A2	D	F1 Vert	F2 Long	F3 Trans	B	C	
G3MAA13013AD	30	13	1.5	1350	1000	10000	6	8	12.4
G3MAA14813AD	48	13	1.5	900	700	10000	6	8	14.7
G3MAA14818AD	48	18	1.5	900	700	10000	6	8	15.4
G3MAA14824AD	48	24	1.5	900	700	10000	6	8	16.1
G3HAA14813AD	48	13	2.0	1650	1100	10000	8		20.8
G3HAA14818AD	48	18	2.0	1650	1100	10000	8		22.0
G3HAA14824AD	48	24	2.0	1650	1100	10000	8		23.3

Notes:
1) Lengths shown are considered standard; for other lengths, consult factory
2) Add "SC" for silicone coated rod (harsh environments)
3) Add "B" for standard hardware (1/2" x 2" carriage bolt; 1/2" hex nut; 1/2" lock washer)
4) For other options, thread sizes, and optional base and end fittings, reference Fiberglass Catalog Numbering System Matrix

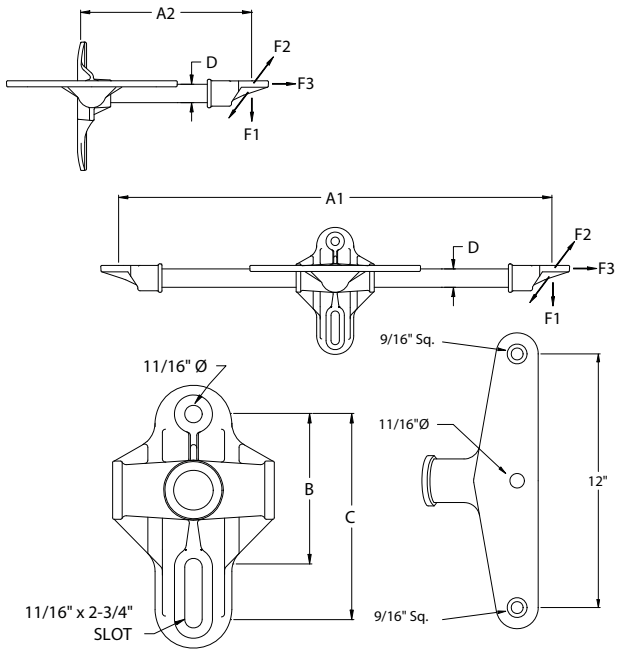

Three Phase Double Position

Features

- Accepts 5/8" mounting hardware

Material

Base:	Aluminum A356-T6
End Fitting:	Ductile iron hot dip galvanized ASTM A-153
Rod:	Fiberglass gray ultraviolet (UV) protective coating

Catalog Number	Dimensions (In)			Min Ultimate Load (Lbs)			Bolt Spacing (In)		Weight (Lbs)
	A1	A2	D	F1 Vert	F2 Long	F3 Trans	B	C	
G3MA013613DD	36	13	1.5	1200	900	10000	6	8	12.3
G3MA014813DD	48	13	1.5	900	700	10000	6	8	13.8
G3MA014824DD	48	24	1.5	900	700	10000	6	8	15.2

Notes:
1) Lengths shown are considered standard; for other lengths, consult factory
2) Add "SC" for silicone coated rod (harsh environments)
3) Add "B" for standard hardware (1/2" x 2" carriage bolt; 1/2" hex nut; 1/2" lock washer)
4) For other options, thread sizes, and optional base and end fittings, reference Fiberglass Catalog Numbering System Matrix

© Copyright 2010 MacLean Power Systems
Issued: May 2010
Supercedes: n/a

11411 Addison Avenue, Franklin Park, IL 60131
T: 847.455.0014 F: 847.455.0029
www.macleanpower.com