



Location:



4-485


Commercial Showerhead

Specification Submittal

Model Numbers	Specification
☐ 4-485 <i>Commercial Showerhead</i>	1 mode commercial showerhead with female ball joint connection includes standard 2.5 gpm (9.5 L/min) flow restrictor. Components made from metal, plated in standard polished chrome finish. 
Modifications	Compliance
☐ -1.5  1.5 gpm (5.7 L/min) flow restrictor ☐ -2.0 2.0 gpm (7.6 L/min) flow restrictor ☐ -A Anchor plate for use with ceramic tile ☐ -B Back plate and bolts for 6" thick wall	-ASME A112.18.1/CSA B125.1 
Warranty Limited Lifetime - to the original end purchaser in consumer/residential installations. 5 Years - for industrial/commercial installations. Refer to www.symmons.com/warranty for complete warranty information.	

Note: Append appropriate -suffix to model number.

Dimensions

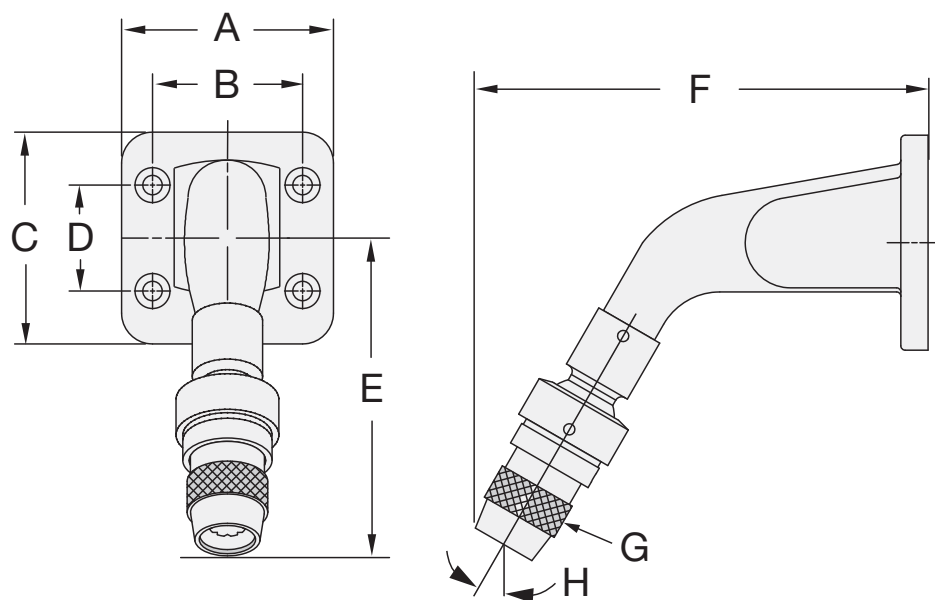

Measurements	
A	3-1/8", 79 mm
B	2-1/8", 54 mm
C	3", 76
D	1-1/2", 38 mm
E	4-5/8", 117 mm
F	6-3/8", 162 mm
G	Turn knurled cylinder for spray adjustment
H	30°

Note: Dimensions subject to change without notice.