


SSPEX-MA SERIES STAINLESS STEEL PEX x MPT ADAPTER

SPECIFICATION:

- For use with ASTM F2769, ASTM F2023, (PE-RT) SDR9 pipe
- For use with ASTM F876 PEX pipe
- Fittings are made to ASTM F1807 standard
- Maximum Pressure Rating: 200 PSI
- Temperature Range: Up to 400°F (204°C)

CERTIFICATION:

- cUPC Listed
- NSF/ANSI 61 & 372 Certified
- Threads to ASME B1.20.1

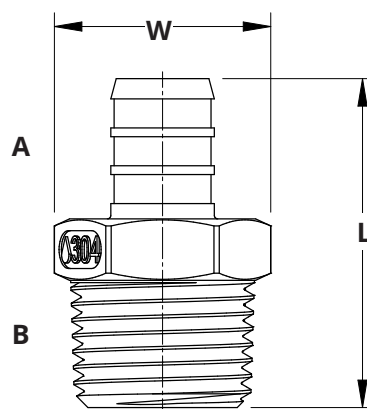

MATERIAL LIST	
Name	Percent of Composition
304 Stainless Steel	
Iron (Fe)	64.0 - 72.0
Carbon (C)	0.08 max
Silicone (Si)	1.00 max
Manganese (Mn)	2.00 max
Phosphorus (P)	0.04 max
Sulfur (S)	0.04 max
Chromium (Cr)	18.0 - 21.0
Nickel (Ni)	8.0 - 11.0

DIMENSIONS								
Part No.	Nominal Pipe Size		L		W		Weight	
	A	B	inches	mm	inches	mm	lbs	grams
SSPEX-MA05	1/2"	1/2"	1.45	36.85	0.85	21.59	0.07	31.75
SSPEX-MA0507	1/2"	3/4"	1.45	36.85	1.00	25.40	0.12	54.43
SSPEX-MA0705	3/4"	1/2"	1.55	39.37	1.00	25.40	0.12	54.43
SSPEX-MA07	3/4"	3/4"	1.55	39.37	1.00	25.40	0.12	54.43
SSPEX-MA0710	3/4"	1"	1.70	43.18	1.35	34.29	0.19	86.18
SSPEX-MA1007	1"	3/4"	1.75	44.45	1.00	25.40	0.12	54.43
SSPEX-MA10	1"	1"	1.90	48.26	1.35	34.29	0.21	95.25

BOSHART
INDUSTRIES

25 Whaley Avenue, PO Box 310, Milverton, ON CANADA N0K 1M0
Tel: 800-561-3164

boshart.com ♦ blog.boshart.com