

Claytone™ embraces the warmth of the terracotta trend with the refined, modern touch. Offered in a range of soft, earthy hues, this versatile collection comes in multiple sizes and finishes. Perfect for indoor to outdoor transitions, creating cozy grounded spaces with natural charm and timeless appeal.

# CLAYTONE™

*Glazed Porcelain*





LARGE FORMAT

FLOOR / WALL

RESIDENTIAL

COMMERCIAL

INDOOR

OUTDOOR



Ivory\*



Groove Ivory



Black



Groove Black



Gray\*



Groove Gray



Sand\*



Groove Sand



Terra\*




Groove Terra




Coral\*



Groove Coral

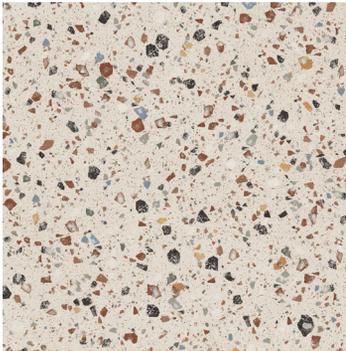


Blend Pure

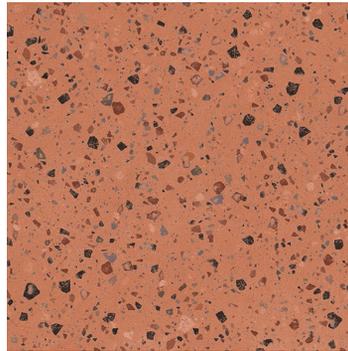

Blend Coral



Blend Sand

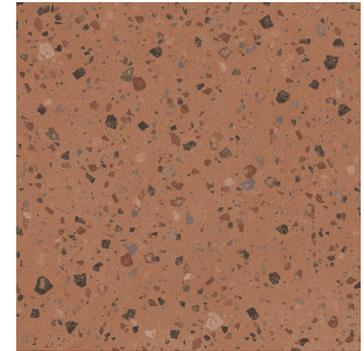

Blend Terra

**EXPRESS**  
IN STOCK

Sand 12x24 & Blend Pure 12x12

\*R11 Finish Available in Coral, Gray, Ivory, Sand, and Terra Colors.



Sizes	Sand 12x24					Blend Pure 12x12		
	47" x 47" 47.24" x 47.24"	24" x 47" 23.62" x 47.24"	24" x 24" 23.62" x 23.62"	12" x 24" 11.81" x 23.62"	4" x 47" Floor SBN	47" x 47" 47.24" x 47.24"	24" x 24" 23.62" x 23.62"	12" x 12" 11.81" x 11.81"
Thickness	9.7mm	9.8mm	9.9mm	9.5mm	9.8mm	9.7mm	9.9mm	9.5mm
Faces	4	4	4	4	N/A	4	4	4
Finish	Matte	Matte	Matte	Matte	Matte	Matte	Matte	Matte
Edge	Rectified	Rectified	Rectified	Rectified	Cut/Rounded	Rectified	Rectified	Rectified
Grout Joint Recommendation	Check Website	Check Website	Check Website	Check Website	Check Website	Check Website	Check Website	Check Website
Testing	Abrasion Resistance C1027	Breaking Strength C648	Chemical Resistance C650	Water Absorption C373	DCOF ANSI A1371	Scratch Hardness MOHS	Shade Variation Rating	
	Check Website	Check Website	Check Website	Check Website	Check Website	Check Website	V2	

**Sustainability Attributes**

- Red List Free
- Health Product Declaration (HPD) provided upon request
- Product Packaging is 100% recyclable

\*For more information visit [www.emser.com](http://www.emser.com).  
Always consult a professional for proper usage and installation.



Product and Installation Details | ANSI A108.02 Section 4.3.8.2 - For running bond/brick joining patterns utilizing tiles (square or rectangular) where the side being offset is greater than 18" (nominal dimension), the running bond offset will be a maximum of 33% unless otherwise specified by the tile manufacturer. If an offset greater than 33% is specified, specifier and owner must approve mock-up and lippage.

