

c UL us LISTED

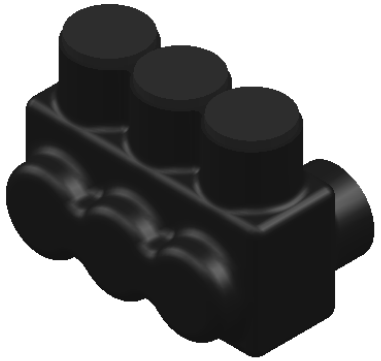

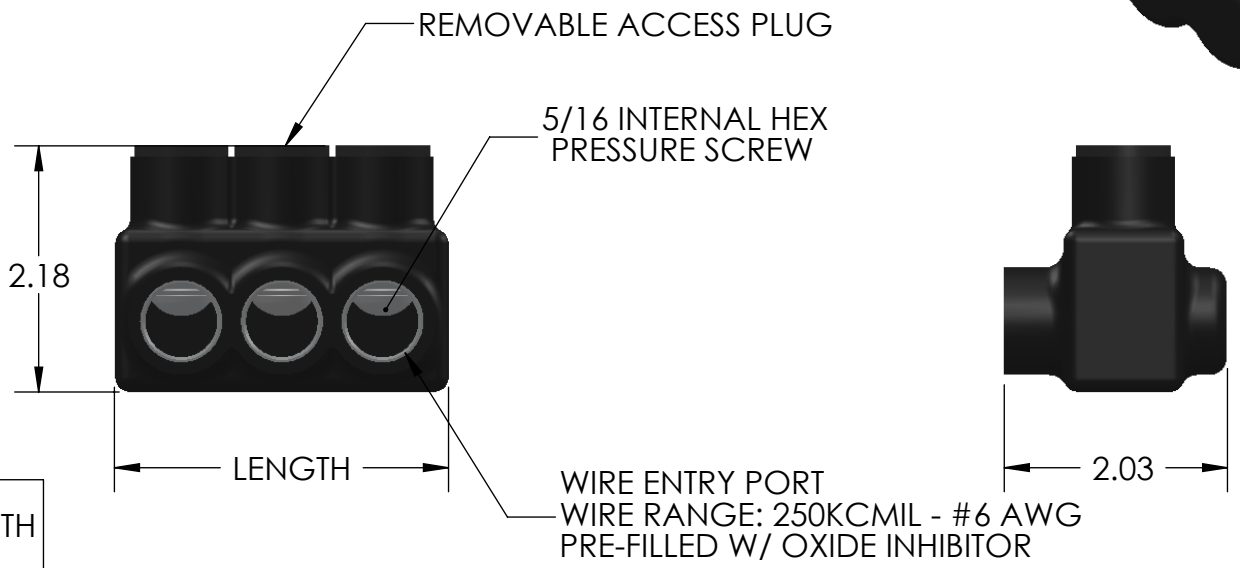

IPL250-3 SHOWN

PART NUMBER	NO. OF PORTS	LENGTH
IPL250-3	3	2.93
IPL250-4	4	3.80
IPL250-5	5	4.66
IPL250-6	6	5.22
IPL250-8	8	7.24
IPL250-10	10	8.97

CONTACT NSi FOR SALES @ 800.321.5847

NOTES:
1. CONNECTOR MANUFACTURED FROM 6061-T6 ALUMINUM ALLOY.
2. UL LISTED PER UL486A/B SPECIFICATIONS FOR 600V.
3. DUAL RATED FOR 90˚C COPPER AND/OR ALUMINUM CONDUCTOR.
4. COLD TEMPERATURE RATED TO -45˚C.
5. HIGH DIELECTRIC STRENGTH INSULATION IS ABRASION, CHEMICAL AND UV RESISTANT.

POLARIS SALES . CO . INC

PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF POLARIS SALES CO. INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF POLARIS SALES CO. INC. IS PROHIBITED.

11625 PROSPEROUS DRIVE ODESSA, FL 33556

TITLE: INSULATED 250 CONNECTOR

	NAME	DATE
DRAWN BY	S.PARRY	06/2012

DWG. NO. IPL250-

MATERIAL: N/A | SCALE: *N/A* | SHEET: 1 OF 1