FXLuminaire

Runa™ RP-32 and RP-33 Path Lights

PATH LIGHT




PROJECT

CATALOG #

TYPE

NOTES

Bring precise illumination to any pathway with the Runa RP-32 and RP-33 Path Lights! Boasting a sleek tubular design, these innovative fixtures include an easily adjustable, rotational head that delivers light exactly where it's needed. The RP-32 also offers compatibility with Luxor® technology, balancing quality, performance, and functionality to ensure optimal lighting control from every angle.

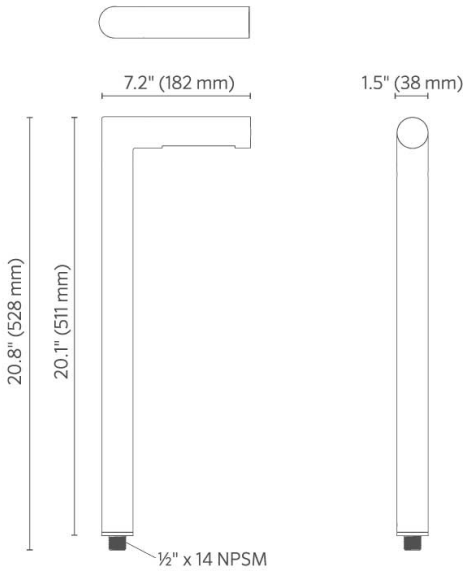

Quick Facts

- Sleek, contemporary design and small footprint
- Conduit stabilizer and standard ¾" conduit provide extra stability
- Sturdy die-cast, extruded aluminum and an IP67 rating for resilience and added peace of mind
- Adjustable, rotational head for precise lighting control
- Compatible with Luxor technology for powerline zoning, smooth PWM dimming, and RGBW color-changing options
- Two-part anodization and TGIC powder-coat finish for added corrosion resistance

	RP-32	RP-32	RP-33
Light Source	Powerboard™ Integrated LEDs	Powerboard™ Integrated LEDs	G4 LED Lamp
Power	1 LED	ZDC	E2
Total Lumens (lm)	55	50-60	50-55
Power Consumption (VA)	2.2	4.3	1.3
Efficacy (lm/W)	28	21	41
Color Temperature (CCT)	2700K (Warm) 3000K (Soft) Wildlife-Friendly (Amber)	RGBW	2700K (Warm) 3000K (Soft)
Color Rendering Index (CRI)	85+	-	84+
Maximum Candela (cd)	24	25	N/A
Input Voltage (V)	10-15	11-15	10-15
Luxor Compatibility			
Powerline Zoning (Z)	Default	Default	-
Smooth PWM Dimming (D)	ZD	ZDC	-
RGBW Color-Changing (C)	-	ZDC	-
Minimum Rated Life (L90/B10)	72,000 Hrs	55,000 Hrs	33,000 Hrs

About FX Luminaire

As a leading manufacturer of landscape and architectural lighting, FX Luminaire provides innovative products, resources, and support to help customers bring their visions to life. The company offers a range of specification-driven solutions, including fixtures, controls, and accessories, to enhance residential and commercial landscapes.

Threads

½"–14 NPSM (with included adapter)

Dimming

Primary: Consult transformer specifications Secondary: Luxor® control or a trailing-edge (reverse phase-cut) dimmer

Adjustability

Adjustable fixture head rotates 270° to direct light upward/downward as needed.

Finish

Two-layer protection of sulfuric acid anodization and polyester, TGIC powder-coat finish provide superior outdoor weathering in all conditions. Tested to ASTM standards.

Hardware

Standard North American ¾" Schedule 40 conduit and composite stabilizing stake mount

Wiring

18 AWG (1 mm); SPT-1W; 220°F (105°C); 300 V; 10' (3 m) length, measured from the light aperture

Sockets

Socket contains MoistureBlock™ Technology to prevent moisture from wicking up into sealed areas of the fixture

Power

Input 10–15 VAC/DC, 50/60 Hz. for white, and 11–15 VAC, 50/60 Hz. for RGBW (ZDC). Remote transformer required (specify separately).

Housing

Die-cast aluminum housing with capacity for Powerboard rectangular 1 LED or G4 LED lamp.

Weight

3 lbs (1.4 kg)

Lens

Frosted polycarbonate lens with high tolerance for thermal expansion, stress, and abuse

International Compliance

Compliant per IEC 60598-1 and EIC 60598-2-4 by selecting the “E” version (RP-32 only)

Ambient Operating Temperature

0°F to 140°F (-18°C to 60°C)

Sustainability

Innovation meets conservation in the design and manufacturing of our products. Where we can, we use recycled materials while maintaining superior functionality. Our LED products provide high quality light at optimal energy efficiency, lifespan, and durability.

Control

ZD or ZDC options utilize Luxor® Technology to zone fixtures in up to 250 groups, dim each group in 1% increments between 0% and 100%, or change to one of 30,000 colors with RGBW LEDs. Select the ZD option for zoning/dimming or ZDC for zoning/dimming/color. Standard fixture is zoneable with Luxor (RP-32 only).

Manufacturing

ISO 9001:2015 certified facility

Bug Rating

B0-U0-G0 with housing facing directly downward

Warranty

Physical product: 10-year limited. Electronics: 10-year limited (RP-32) or 5-year limited (RP-33).


Listings

Fixture	Control	Power	Color Temp	Compliance	Riser Height	Finish
RP-32	**[Default]** Zone with Luxor, On/Off, Phase Dimmable	**1LED** 2.2 VA, 45 lm	**[Default]** No color, "No Lamp" Option Specified	**[default]** North America (UL Listed)	18R	**BZ** Bronze Metallic
RP-33	**ZD** Zone/Dim with Luxor	**[Default]** 2.2 VA, 45 lm, ZD Option Required	**W** Warm (2700K)	**E** International (CE Certified)		**FB** Black
	ZDC Zone/Dim/Color with Luxor	**[Default]** 4.3 VA, 35-45 lm, ZDC Option Required	**S** Soft (3000K)			**DG** Desert Granite
	[Default] G4	**E2** 1.3 VA, G4 Eco LED Lamp, 30 lm	**T** Wildlife-Friendly (585 to 595 nm)			**WI** Weathered Iron
		NL Lamp not included	**[Default]** RGBW, ZDC Option Required			**SB** Sedona Brown
						FW Flat White
						SV Silver

[ ] – [ ] – [ ] – [ ] – [ ] – [ ] – [ ]

EXAMPLE FIXTURE CONFIGURATION: *RP-32*-XX-XXXX-XX


Isofootcandle Plot
RP-32 (1 LED)

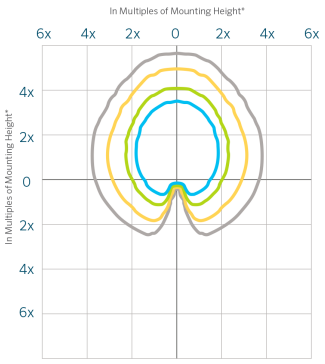

Mounting height: 1.5' (0.5 m)
Total LLF: 1.0

**Mounting height refers to the distance between the workplane and the bottom of the fixture's aperture.*


Isofootcandle Plot
RP-32 (ZDC)

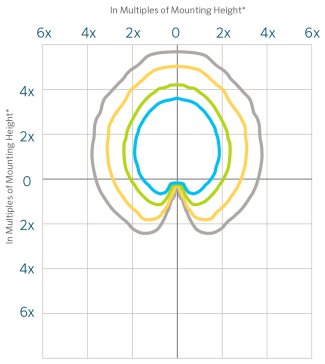

Mounting height: 1.5' (0.5 m)
Total LLF: 1.0

**Mounting height refers to the distance between the workplane and the bottom of the fixture's aperture.*

Isofootcandle Plot
RP-33 (G4 Eco 1.3 VA)

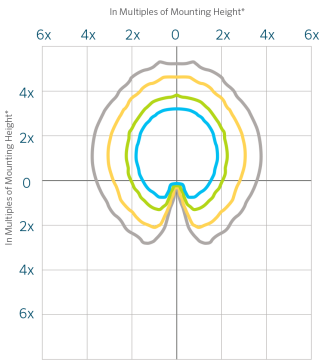

Mounting height: 1.5' (0.5 m)
Total LLF: 1.0

**Mounting height refers to the distance between the workplane and the bottom of the fixture's aperture.*

MOUNTING OPTIONS: Specify Separately

Mounts	Catalog No.	
Long Slot Spike	250015840000	
Adapter, ¾" Schedule 40 to ½"-14 NPSM	250035490000SP	
CE Certified Spike	eKitSpike	
ProAim® Ratcheting Spike	PARS	
Variable Height Riser for Up Lights	VHR-UL	

Mounts	Catalog No.	
Three-Prong Spike	250020020000	
Conduit Stabilizer for MP-J (with ¾" conduit)	CSKIT-MPJ	
2.5'' Post Mount with Stabilizer	LS6054	
Deck Mount for Runa RP-32 and RP-33 Path Lights	RP-32-DM-XX	