


010-2200 / 010-2201

Americast Shower Base
LH or RH Round Drain

60 x 34 x 3 inches

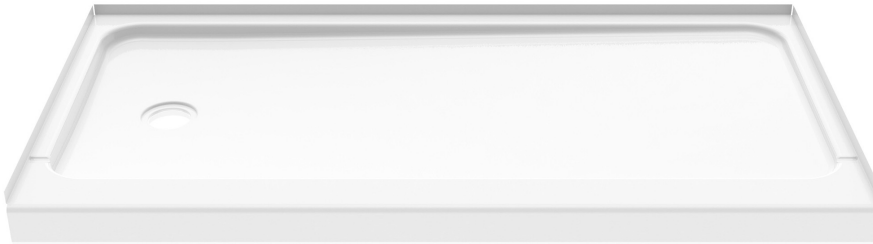

COLOR & TRIM OPTIONS

Stock	Code
White	00

FEATURES

- Low Profile Curb Height: 3"
- Americast® engineered insulated backing
- Full textured slip-resistant floor surface
- Integrated weep channels for optimal drainage
- Integral 3-sided tile flange for leak prevention
- Pre-leveled support pad for easier installation
- Easy to clean, resistant to: bacteria, mold, mildew and stains
- Square and trench drain options available
- Suggested drains: Solvent Weld type fitting similar to Oatey Part No. 42097 or Compression type "No-Caulk" fitting similar to Oatey Part No. 42099
- Limited lifetime residential warranty/3-Year commercial warranty

CODES

- National Plumbing Code of Canada, International Residential Code, International Plumbing Code, Uniform Plumbing Code, ASME A112.19.1, ICC/ANSI A117.1, ASTM C282, ASTM C448, ASTM E162, ASTM E662, ASTM F462, ASTM E303-22, CSA B45.2, WWP-541, UL -969, LEED Credits Applicable, HUD, VA, BAA/BABA



Material to be stacked on pallets







TECHNICAL SPECIFICATIONS

010-2200 / 010-2201

60 x 34 x 3 inches

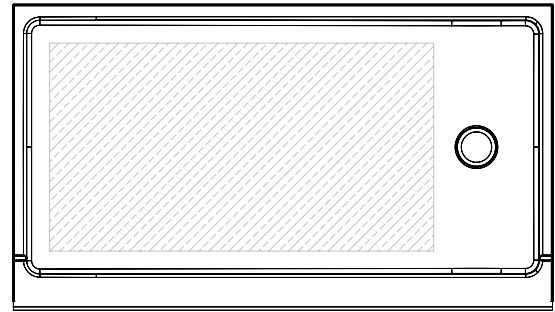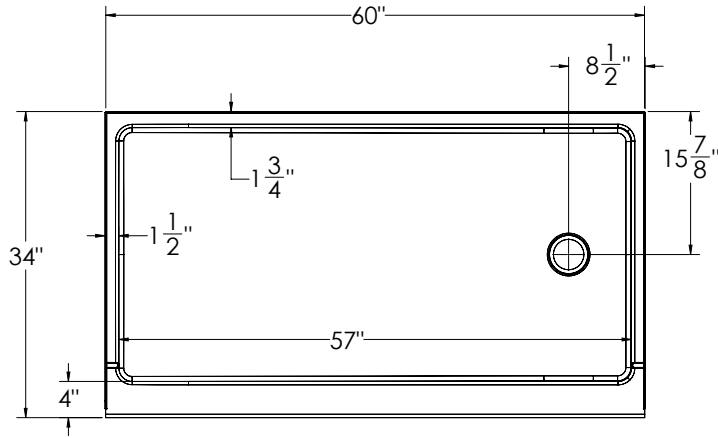

Shaded area represents anti-slip coverage



FEATURES

lbs Dimensional Tolerance $\pm \frac{1}{4}$ ". Dimensions needed for site preparation should be measured from the unit. Manufacturer assumes no responsibility for preparatory work.


Model #	Material	Drain	Surface	Pkg. Wt.
Bathtub #010-2200-00	Americast®	RH	Porcelain Enamel w/ Anti-slip	62
Bathtub #010-2201-00	Americast®	LH	Porcelain Enamel w/ Anti-slip	62

DIMENSIONS

Specifications	inches
Width	60
Depth	34
Height	4
Skirt Height	3
Step-over Depth	4
Shower Door Mountable Surface Depth:*	4
Drain Rough-In (from Back Wall)	15 ⁷ / ₈
Drain Rough-In (from Side Wall)	8 ¹ / ₂
Drain Diameter	3 ¹ / ₄

FRAMING DIMENSIONS inches

Type	D Depth	W Width	H Height	A	B	C
Alcove	34	60	–	Box Out	8 ¹ / ₂	15 ⁷ / ₈

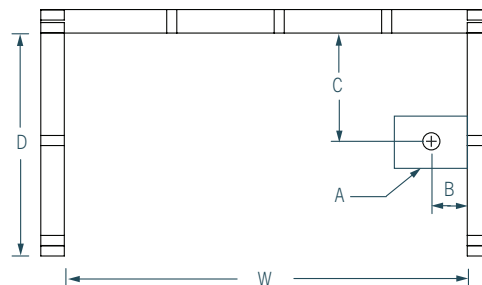

Shower doors can only be attached to the shower base surface via adhesive, and cannot be drilled/nailed to the shower base surface