




BE MKII DATA SHEET

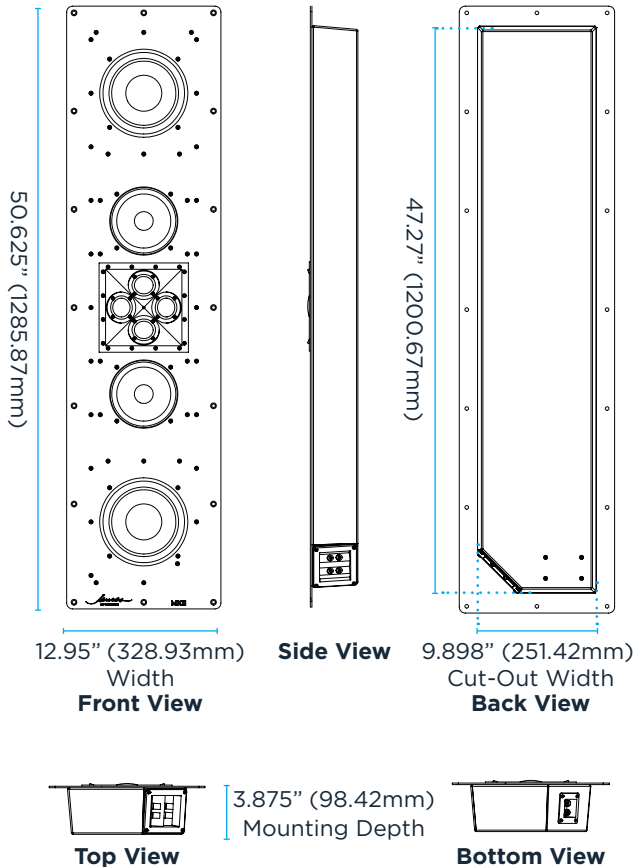

BE808 MKII TECHNICAL SPECIFICATIONS

SKU	BE808 MKII 60642 - Each
Tweeter	(4) 1" (25mm) Beryllium
Mid	(2) 6.5" (165) Neodymium
Woofer	(2) 8" (203mm) Aluminum
Frequency Response	45Hz-40kHz +/-3dB
Nominal Impedance	4 ohms
Recommended Power Range	50 watts minimum; 200 watts maximum
Sensitivity (2.83V/1m)	98dB SPL
Crossover	3-way
Average Coverage Angle	105 Degrees Horizontal; 50 Degrees Vertical
Enclosure	Aircraft Marine Grade Aluminum
Grille Finishes	Black, White Cloth, or White Paintable Grille
Cut-Out Dims (WxH)	9.898" x 47.27" (251.42mm x 1200.67mm)
Required Mounting Depth (D)	3.875" (98.42mm)
Overall Dimensions (WxHxD)	12.95" x 50.625" x 4.01" (328.93mm x 1285.87mm x 101.62mm)
Grille Dimensions (WxH)	13.26" x 50.935" (336.8mm x 1293.75mm)
Accessories	Requires Preconstruction Board (PCB)

BE808 MKII IN-WALL ACCESSORIES

BE808 PB
Pre Construction Board (PCB) | 60426

James by Sonance warrants this product to the original purchaser to be free from defects in materials and workmanship under normal use. **Limited Lifetime Warranty** applies to indoor installations. **Limited Five (5) Year Warranty** applies to outdoor or moisture-dense environments (e.g., spas, showers, saunas). **Grille is warranted for five (5) years for both indoor and outdoor use.** Warranty valid only for products purchased from authorized dealers and installed per manufacturer guidelines. Excludes damage from misuse, accidents, modifications, improper installation, or normal wear. For details or claims, visit [sonance.com/company/contact](https://www.sonance.com/company/contact)

©2025 Sonance. All rights reserved. Sonance is a registered trademarks of Dana Innovations. Due to continuous product improvement, all features and specifications are subject to change without notice. For the latest Sonance product specification information visit our website at www.sonance.com.

JAMES by SONANCE • 2185 Park Place • Minden, NV 89423 • USA • PHONE: (775) 461-7500 • www.sonance.com

11.11.2025