
GE Appliances

DVLR223EE – GE® 5.8 Cu. Ft. Extra-Large Capacity Electric Dryer

Dryer Dimensions (in inches)

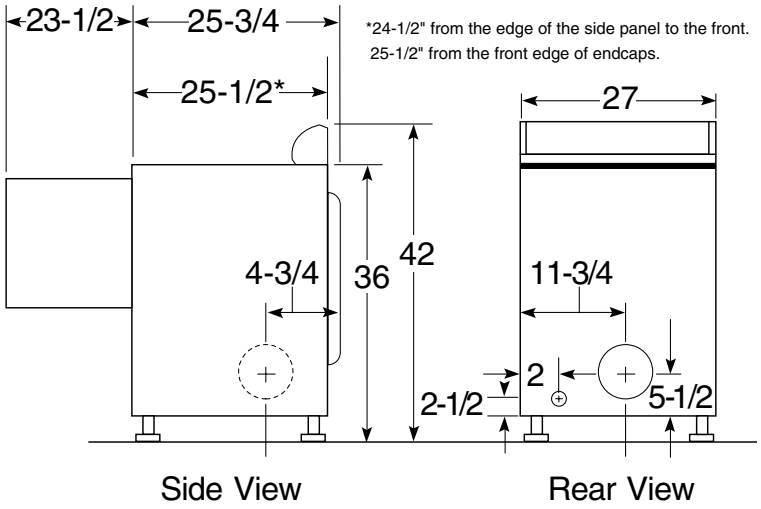

Exhaust Options:
Electric – 4-way via rear, right, left and bottom.

Circuit Requirements:
Electric – An individual, properly-grounded branch circuit, protected by a 30-amp circuit breaker or a time-delay fuse, is required.

Electric Dryer Rating:
240V, 5600W, 24A, 60 Hz
208V, 4400W, 22A, 60 Hz

Note: Dryer wall outlet must be located within 36" of service cord entry and accessible when dryer is mounted in position.


Installation Information: For complete information, see installation instructions packed with your dryer.

Listed by Underwriters Laboratories

For answers to your Monogram,® GE Profile™ or GE® appliance questions, visit our website at GEAppliances.com or call GE Answer Center® service, 800.626.2000.

Specification Created 2/04
370274

Dryer Exhausting Information – Use Metal Duct Only
Vertical and Horizontal Ducting



Domestic Dryer Models	Number of 90° Turns	Best Performance: Maximum Length of 4" Dia. **Rigid Metal** Duct, Exhaust Hood Type **A** 4" Opening	Best Performance: Maximum Length of 4" Dia. **Rigid Metal** Duct, Exhaust Hood Type **B** 2-1/2" Opening	Maximum Length of 4" Dia. **Flexible Metal** Duct, Exhaust Hood Type **A** 4" Opening	Maximum Length of 4" Dia. **Flexible Metal** Duct, Exhaust Hood Type **B** 2-1/2" Opening
7.0, 6.0 and 5.8 Capacity Models all Electric Dryers	0	90 ft.	127 ft.	75 ft.	52 ft.
	1	60 ft.	117 ft.	65 ft.	42 ft.
	2	45 ft.	107 ft.	55 ft.	32 ft.
	3	35 ft.	97 ft.	45 ft.	22 ft.
	4	25 ft.	87 ft.	35 ft.	12 ft.
7.0, 6.0 and 5.8 Capacity Models all Electric Dryers	0	90 ft.	60 ft.	55 ft.	45 ft.
	1	60 ft.	45 ft.	40 ft.	30 ft.
	2	45 ft.	35 ft.	30 ft.	20 ft.
	3	35 ft.	25 ft.	20 ft.	15 ft.
7.0, 6.0 and 5.8.0 Capacity Models all Gas Dryers	0	90 ft.	60 ft.	55 ft.	45 ft.
	1	60 ft.	45 ft.	40 ft.	30 ft.
	2	45 ft.	35 ft.	30 ft.	20 ft.
	3	35 ft.	25 ft.	20 ft.	15 ft.

Special Installation Requirements


Alcove or Closet Installation:
- If your dryer is approved for installation in an alcove or closet, it will be stated on a label on the dryer back.
- The dryer MUST be exhausted to the outside.
- Minimum clearances between dryer cabinet and adjacent walls or other surfaces are:
  0" either side
  3" front and rear
- Minimum vertical space from floor to overhead cabinets, ceilings, etc. is 52".
- Closet doors must be louvered or otherwise ventilated and must contain a minimum of 60 sq. in. of open area equally distributed. If this closet contains both a washer and a dryer, doors must contain a minimum of 120 sq. in. of open area equally distributed.
- No other fuel-burning appliance shall be installed in the same closet with a gas dryer.

Bathroom or Bedroom Installation:
- The dryer MUST be exhausted to the outdoors.
- The installation must conform with the local codes, or in the absence of local codes, with the National Fuel Gas Code, ANSI Z223.

Minimum Clearances other than Alcove or Closet Installation:
- Minimum clearances to combustible surfaces
  0" both sides
  3" rear

GE Appliances

DVLR223EE – GE® 5.8 Cu. Ft. Extra-Large Capacity Electric Dryer

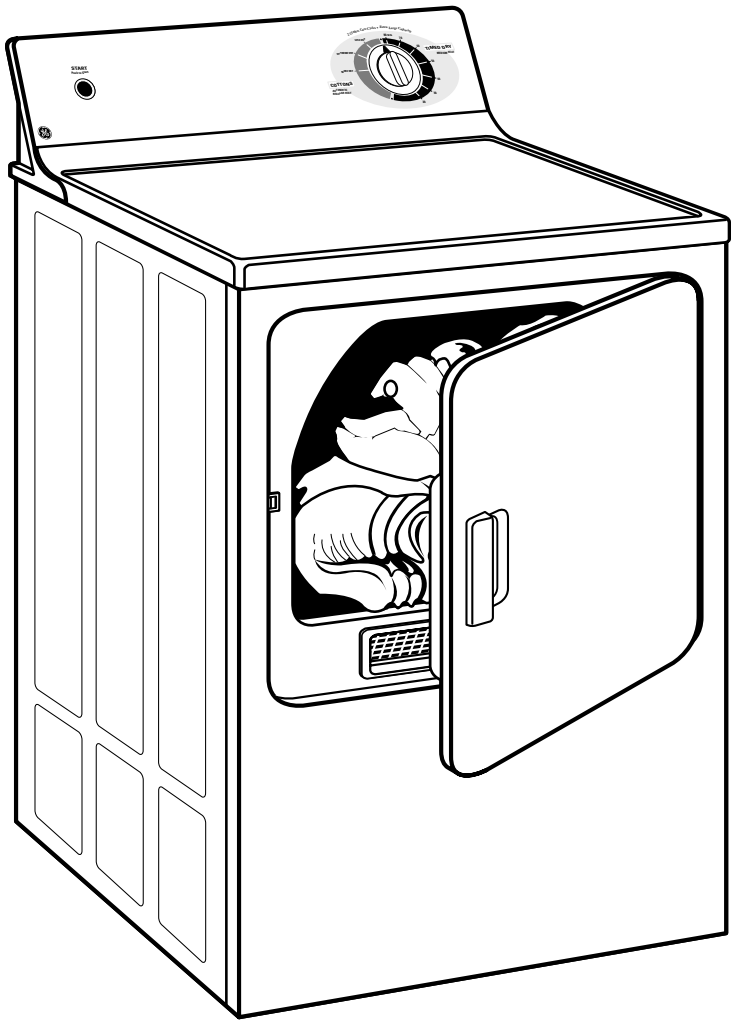

Features and Benefits

- Auto Dry – Uses thermostats to monitor air temperature and reduce fabric ware
- DuraDrum™ – Provides long-lasting dependability and durability
- Two heat selections – Provide the right drying temperatures for regular and delicate clothes
- Two dry cycles – Convenient, preprogrammed settings for regular and delicate clothes
- Quiet-By-Design™ – Engineered for quiet operation
- Reverse-A-Door – Offers added installation flexibility
- Upfront Lint Filter – Easy to reach and clean
- Model DVLR223EEWW – White on white

Specification Created 2/04
370274