

# Hanford 3, 5, 9, and 15 Light Chandelier

3124503, 3124505,  
3124509, 3124515 1.2

## GENERATION LIGHTING

### CAUTION - RISK OF FIRE

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

Use minimum 90°C supply conductors.

### GENERAL PRODUCT INFORMATION:

These fixtures are intended to be installed utilizing NEC compliant junction boxes.

This product is safety listed for damp locations.

Incandescent version may be dimmed with a standard incandescent dimmer. LED version may be dimmed with a LED dimmer. Consult lamp manufacturer for additional information.

This instruction shows a typical installation.


### GENERATION LIGHTING

7400 Linder Ave, Skokie, IL 160077

800.969.3347


[www.visualcomfort.com](http://www.visualcomfort.com)

©2023 Visual Comfort & Co.. All rights reserved. The Visual Comfort & Co. logo is a registered trademark of Visual Comfort & Co. Visual Comfort & Co. reserves the right to change specifications for product improvements without notification

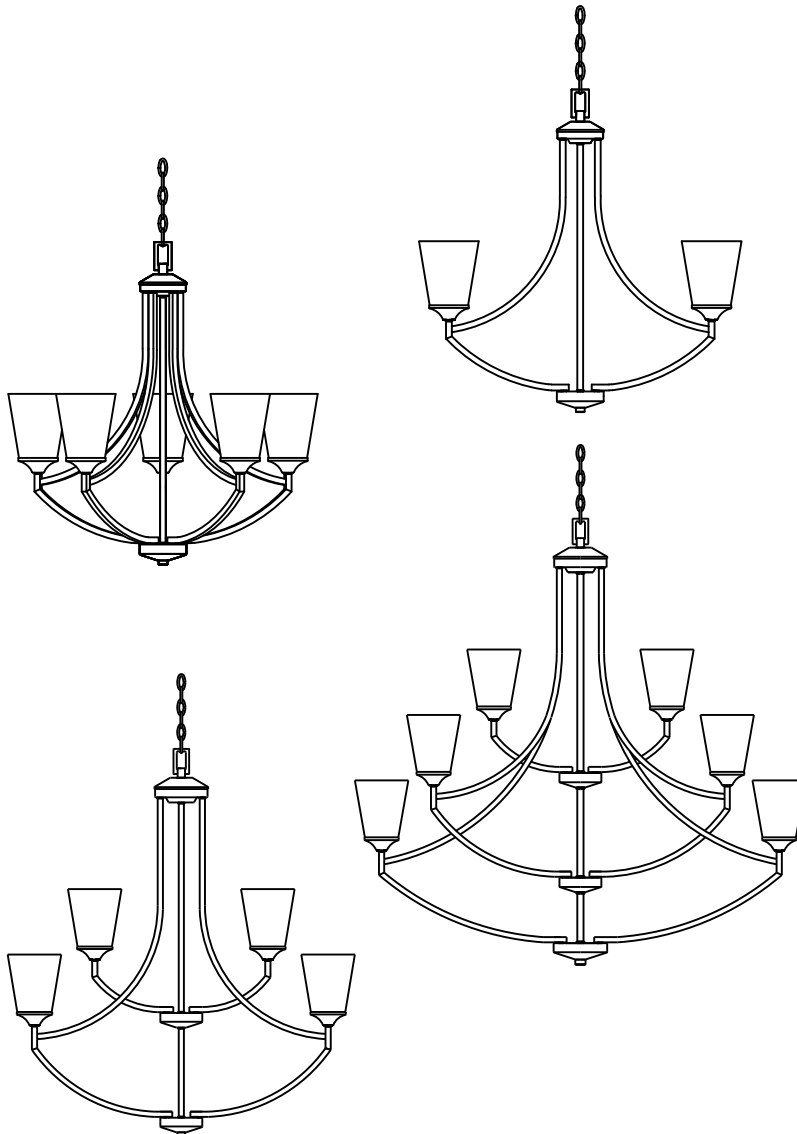

**SAVE THESE INSTRUCTIONS!**

## Install the Fixture

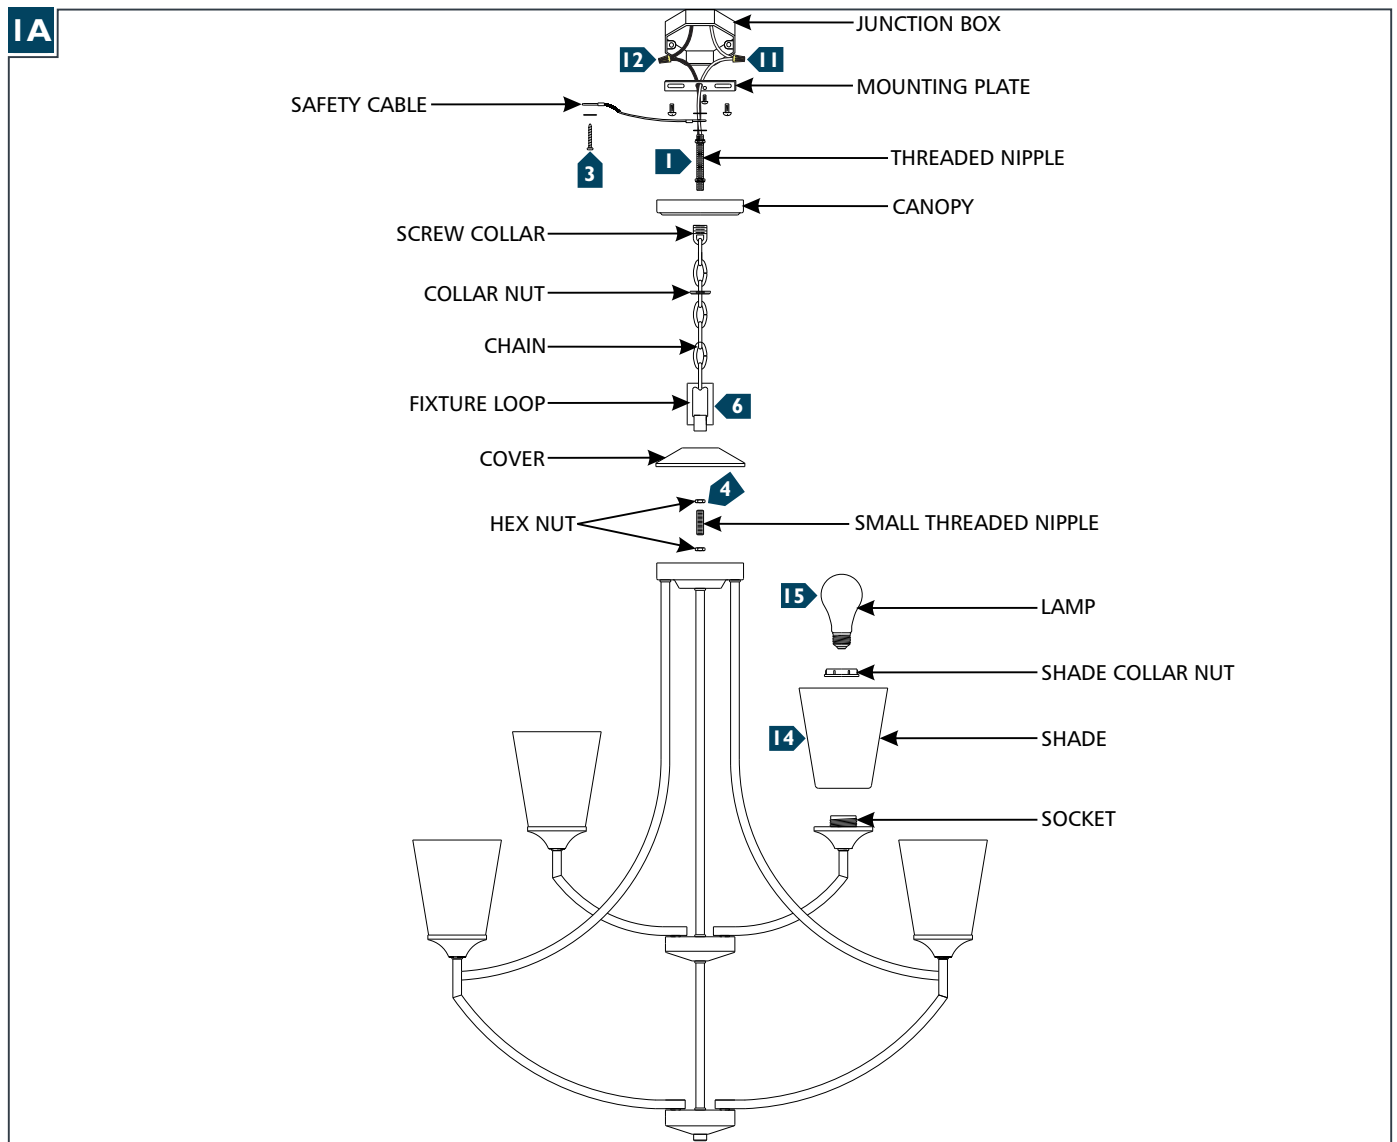

- 1** For fixtures with safety cable: Place the safety cable with washers on each side to the shorter end of the threaded nipple and screw it tightly onto the mounting plate, then screw the screw collar onto the threaded nipple. For fixtures without safety cable: Screw the threaded nipple directly to the mounting plate and screw the screw collar onto the threaded nipple.
- 2** Secure the mounting plate to the junction box.
- 3** For fixtures with safety cable: Secure the safety cable to a secure solid structure in accordance with local building code.
- 4** Install a hex nut onto each end of the small threaded nipple and screw it to the top of the fixture.
- 5** Determine the wanted height of the fixture and remove a portion of the chain by opening a link with pliers.
- 6** Place the cover onto the small threaded nipple and screw the fixture loop onto the fixture. Open the chain link with pliers and install the chain on the fixture loop, then re-close the chain link.
- 7** Unscrew the collar nut from the screw collar, install the collar nut and the canopy onto the chain (in that order).
- 8** Open a link on the other end of the chain with pliers and install the chain onto the screw collar to secure the fixture, re-close the link.
- 9** Weave the cord through the chain, canopy, collar nut, screw collar, threaded nipple, and out of the junction box. Trim the cord leaving enough to make electrical connections.
- 10** Connect the fixture to a suitable ground in accordance to local electrical codes.
- 11** Connect the white fixture wire (square and/or rigid) to the neutral power line wire with a wire nut.
- 12** Connect the black fixture wire (round and/or smooth) to the hot power line wire with a wire nut.
- 13** Neatly place all the wires into the junction box, place the canopy onto the ceiling, and secure it in place by screwing the collar nut tightly onto the screw collar.
- 14** Place the shade onto the socket and secure it in place by screwing the shade collar nut onto the socket. Repeat for all shades.
- 15** Screw the lamps into the sockets. Refer to the label on the socket for Max Wattage information.