


# Communication & Low Voltage



- Supports low voltage communication cables from beams or rods when used with other fasteners.
- *Ultimate Static Load Capacity:* 50 Lbs.
- Finish: Zinc Plated

## Threaded Bridle Rings

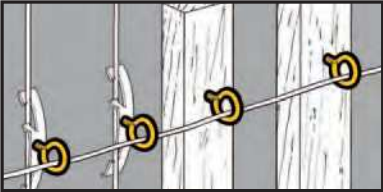

| UPC/Part Number | Catalog Number | Ring Size | Thread Size x Thread Length | Box Qty. |
|-----------------|----------------|-----------|-----------------------------|----------|
| 781011 19550    | BR-8-T         | 1/2"      | #10-24 x 9/16"              | 100      |
| 781011 19555    | BR-12-T        | 3/4"      | #10-24 x 9/16"              | 100      |
| 781011 19560    | BR-20-T        | 1 1/4"    | #10-24 x 9/16"              | 100      |
| 781011 19570    | BR-32-T        | 2"        | #10-24 x 9/16"              | 100      |
| 781011 19565    | BR-20-4T       | 1 1/4"    | 1/4"-20 x 9/16"             | 100      |
| 781011 19575    | BR-32-4T       | 2"        | 1/4"-20 x 9/16"             | 100      |
| 781011 19889    | BR-64-4T       | 4"        | 1/4"-20 x 9/16"             | 50       |



Lag Screw  
for Wood  
Beams

| UPC/Part Number | Catalog Number | Ring Size | Thread Size x Thread Length | Box Qty. |
|-----------------|----------------|-----------|-----------------------------|----------|
| 781011 19875    | BR-16-3W       | 1"        | 9/16" x 9/16"               | 100      |
| 781011 19886    | BR-24-4W       | 1 1/2"    | 1/4" x 27/32"               | 100      |
| 781011 19876    | BR-32-4W       | 2"        | 1/4" x 7/8"                 | 100      |

Read safety/installation instruction sheets in packages before use.