

Design that shapes living.




**GLAZED PORCELAIN TILE** 





# **COLORS**

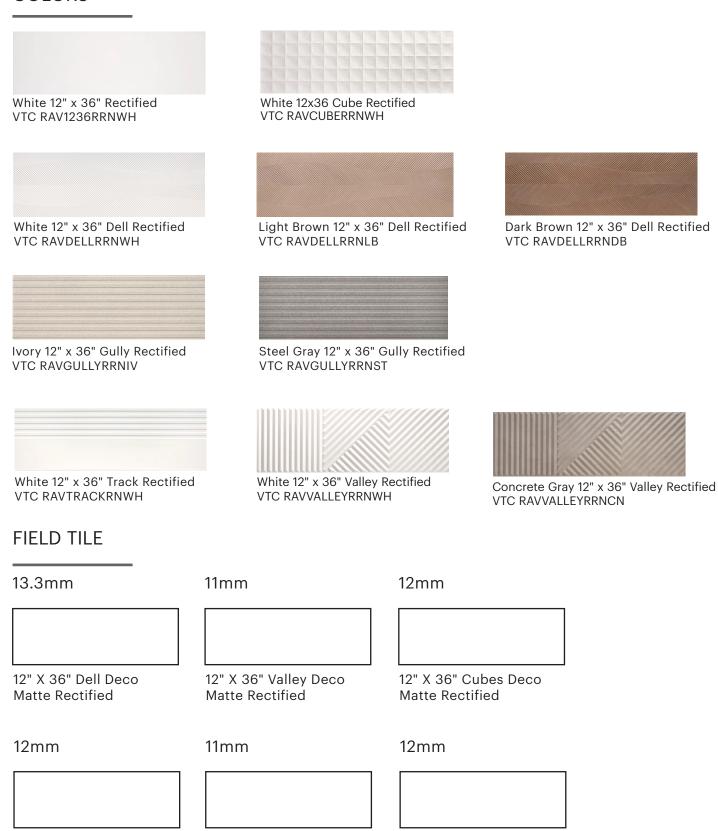

12" X 36" Gully Matte

Rectified

12" X 36" Track Matte

Rectified

12" X 36" Matte Rectified





# **TECHNICAL INFORMATION**







V2 Slight Variation



V3 Moderate Variation



Frost Resistant





Water Absorption: Recommend offset ≥10% pattern ≤33%



Ready Ship

# **Product Characteristics**

TEST	MATTE
Breaking Strength	Not Applicable
Chemical Resistance	Resistant
DCOF	Not Applicable
Deep Scratch Resistance - Unglazed	Not Applicable
Frost Resistance	Resistant
Mohs Hardness - EN101	Not Applicable
Water Absorption	≥10%
Certifications	Not Applicable
Country of Origin	Brazil
Shade Variation Code	v1. v2. v3

# Field Tiles\*

SIZE	ACTUAL	THICKNESS	FINISH
12" x 36" Rectified	11.75" x 35.375"	12mm	Matte
12" x 36" Cube Deco Rectified	11.75" x 35.375"	12mm	Matte
12" x 36" Dell Deco Rectified	11.75" x 35.375	13.3mm	Matte
12" x 36" Gully Deco Rectified	11.75" x 35.375"	11mm	Matte
12" x 36" Track Deco Rectified	11.75" x 35.375"	12mm	Matte
12" x 36" Valley Deco Rectified	11.75" x 35.375"	11mm	Matte

<sup>\*</sup> Not all sizes are available in all colors and finish

# CARE AND MAINTENANCE / APPLICATION

# PORCELAIN CARE & MAINTENANCE

#### INITIAL CLEANING

Proper cleaning after installation is essential for future maintenance. Remove excess grout using clean water and a sponge. If grout leaves behind a white haze, it can be wiped off using a clean cloth after grout has cured. Stubborn residue may require the use of a grout haze remover solution or neutral detergent. Thoroughly rinse the area with clean water and dry with a clean towel or wet vacuum.

#### ROUTINE MAINTENANCE

Immediately wipe up any spills and clean the area using a damp cloth or sponge. Remove loose soil using a broom or vacuum. To remove stubborn surface debris, use a scraper or putty knife. Wipe the area with a PH-neutral and soapless cleaner. Rinse with clear water and wipe dry to prevent residue. Do not use cleaning wax, oil-based cleaners, ammonia, sealants, or products containing acid or bleach for routine maintenance. Avoid using abrasive cleaning products such as steel wool.

# Application\*\*

		WALL	FLOOR
Interior	Residential	•	
Interior	Commercial	•	
Interior	Heavy Commercial		
Exterior	Residential/Commercial	•	

<sup>\*\*</sup> These recommendations are not defined by ANSI Standards

### **ILLINOIS**

Chicago 345 N Wells St, Suite 200 Chicago IL 60654

Elk Grove Village 1601 Estes Ave Elk Grove Village IL 60007

### **IOWA**

Clive 2001 NW 92nd Court Clive IA 50325

#### **KANSAS**

Kansas City Dist Center 5100 Kansas Ave Kansas City KS 66106

Wichita 2140 W Harry Court Wichita KS 67213

## **MICHIGAN**

Farmington Hills 24404 Indoplex Circle Farmington Hills MI 48335

Grand Rapids 3440 Broadmoor Ave SE Grand Rapids MI 49512

Livonia Dist Center 28320 Plymouth Road Livonia MI 48150

Troy 900 W Maple Road Troy MI 48084

### **MINNESOTA**

Plymouth 1820 Berkshire Lane North Plymouth MN 55441

### **MISSOURI**

Springfield 2727 N LeCompte Road Springfield MO 65803

St. Louis 9215 and 9245 Dielman Industrial Dr St. Louis MO 63132

### **NEBRASKA**

Omaha 10501 | Street Omaha NE 68127

### OHIO

Brooklyn Heights 4749 Spring Road Brooklyn Heights OH 44131

Warrensville Heights 4670 Richmond Road Warrensville Heights OH 44128

## **OKLAHOMA**

Oklahoma City 5600 SW 36th St, Suite C Oklahoma City, OK 73179

Tulsa 11915 East 51st St Tulsa OK 74146

### **WISCONSIN**

Menomonee Falls W135 N5511 Campbell Drive Menomonee Falls WI 53051



Good design is born of creativity and imagination, as we build and renovate, update and expand, the materials we select will define the quality of the spaces we live in beyond what meets the eye.

