



## EMMONS 2 LIGHT FLUSH MOUNT

7739002

### General Product Information



### Tools Required




### Safety Information

**CAUTION-RISK OF FIRE**


This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

**USE MINIMUM 90°C SUPPLY CONDUCTORS.**



Turn off electrical current at the source before working with any lighting fixture or portable lamp.

Install and use this product in adherence with local electrical codes and regulations.

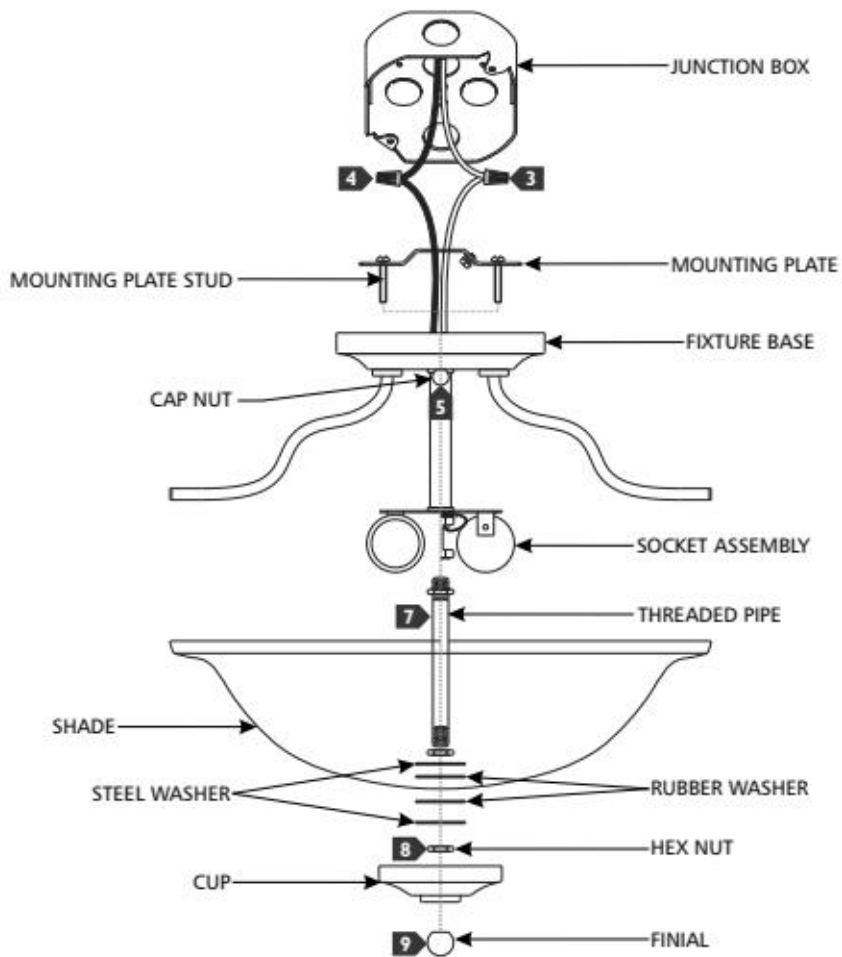

## INSTRUCTIONS

### I. Preparing the Fixture

1. Secure the mounting plate to the junction box.

### II. Wiring the Fixture

1. Safety first! Locate the circuit breaker and switch it off to cut off the power supply to the relevant circuits to ensure there's no electricity running through the wiring.
2. In accordance with local electrical codes, connect the fixture ground wire (bare copper or silver wire) to suitable ground. This may be a green ground screw on the mounting plate, which the ground wire should be tightly wrapped around, or a house wire (green or bare copper wire without insulation).
3. Twist the bare ends of the following pairs of wires together using a wire nut to secure a connection:
  - a) White fixture wire to neutral power line wire
  - b) Black fixture wire to hot power line wire
4. Place the fixture base onto the mounting plate studs and secure in place by screwing the cap nuts onto the mounting plate studs.
5. Screw the lamps into the sockets. Refer to the label on the socket for Max Wattage Information.
6. Install a hex nut onto each end of the threaded pipe, then screw the threaded pipe to the bottom of the socket assembly.
7. Place a steel washer, rubber washer, shade, rubber washer, and steel washer in that order onto the threaded pipe and secure in place by screwing a hex nut onto the threaded pipe.
8. Place the cup onto the threaded pipe and secure it by screwing the finial onto the threaded pipe.