

TECHNICAL INFORMATION



V1 Uniform
Appearance



Stock



DCOF: ≥ 0.42



Frost Resistant



Water Absorption:
< 0.5%



Made in Spain


Accent



Black VTC FEBK



Gray VTC FEGY



Green VTC FEGN



Ivory VTC FEIV



Navy VTC FENV



Pink VTC FEPN



Sky VTC FESK



White VTC FEWH


Cross



Ash VTC FEAS




Buff VTC FEBF



Chalk VTC FECH



Loam VTC FELM




Terracotta VTC FETR

Star



Ash VTC FEAS




Buff VTC FEBF



Chalk VTC FECH



Loam VTC FELM



Terracotta VTC FETR

TECHNICAL INFORMATION



V1 Uniform
Appearance



Stock



DCOF: ≥ 0.42



Frost Resistant











Water Absorption:
 $< 0.5\%$



Made in Spain

STAR, CROSS AND DOT PATTERNS

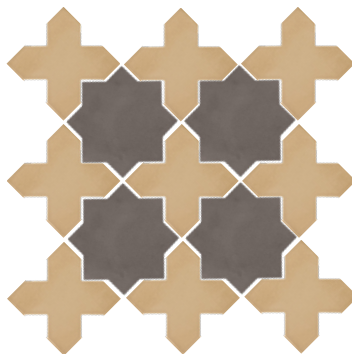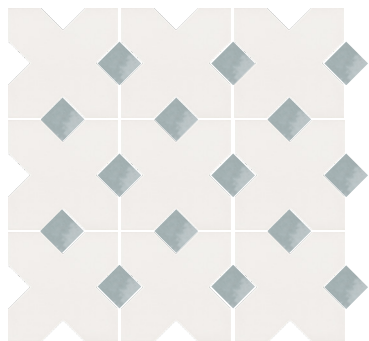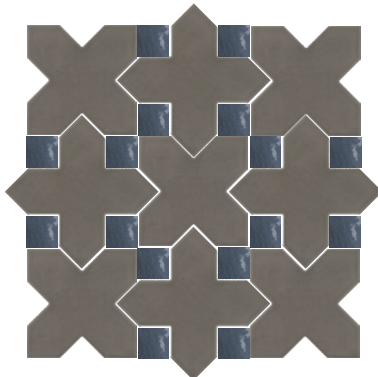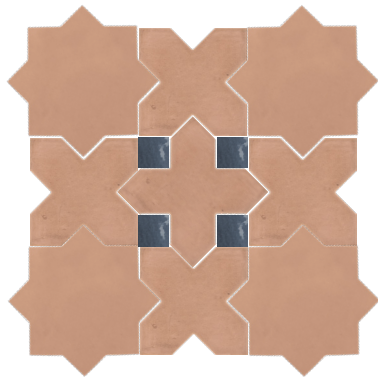



Tiles, Mosaic and Trim*

SIZE	ACTUAL	THICKNESS	FINISH
1" x 1" Accent Glossy Rectified	1.34" x 1.34"	9mm	Gloss
5" x 5" Cross	4.72" x 4.72"	9mm	Matte/Natural
1" x 1" Accent Rectified	1.34" x 1.34"	9mm	Matte/Natural
7" x 7" Star	6.61" x 6.61"	9mm	Matte/Natural

* Not all sizes are available in all colors and finishes.

Performance Characteristics

Breaking Strength	> 1300N
Chemical Resistance	GA/GLA/GHA
DCOF	≥ 0.42
Deep Scratch Resistance - Unglazed	N/A
Frost Resistance	Resistant
Mohs Hardness - EN101	N/A
Water Absorption	< 0.5%
Certifications	N/A
Country of Origin	Spain
Shade Variation Code	V3

Application**

		WALL	FLOOR
Interior	Residential	•	•
Interior	Commercial	•	•
Interior	Heavy Commercial	•	
Exterior	Residential/Commercial	•	

** These recommendations are not defined by ANSI Standards

