



Tresham®

60" x 36" alcove shower base, right drain
K-1978

Features

- Low-threshold design for easy entry and exit
- Single threshold for three-wall installation
- Integral 18" (457 mm) undercut seat at left
- Coordinates with other products in the Tresham collection

Material

- Acrylic

Installation

- Right drain

Recommended Products/Accessories

- K-706009-D3 Frameless Sliding Shower Door
- K-706009-L Frameless Sliding Shower Door
- K-706015-D3 Frameless Sliding Shower Door
- K-706015-L 74" H sliding shower door with 1/4"-thick glass
- K-9132 Shower Drain
- K-23726 Drain treatment

Codes/Standards

CSA B45.5/IAPMO Z124
ASTM E162
ASTM E662


KOHLER® Plastic Baths and Shower Bases Lifetime Limited Warranty


See website for detailed warranty information.

Available Colors/Finishes

Color tiles intended for reference only.

| Color | Code | Description |
|-------|------|-------------|
|-------|------|-------------|

| | | |
|---|---|-------|
|  | 0 | White |
|---|---|-------|

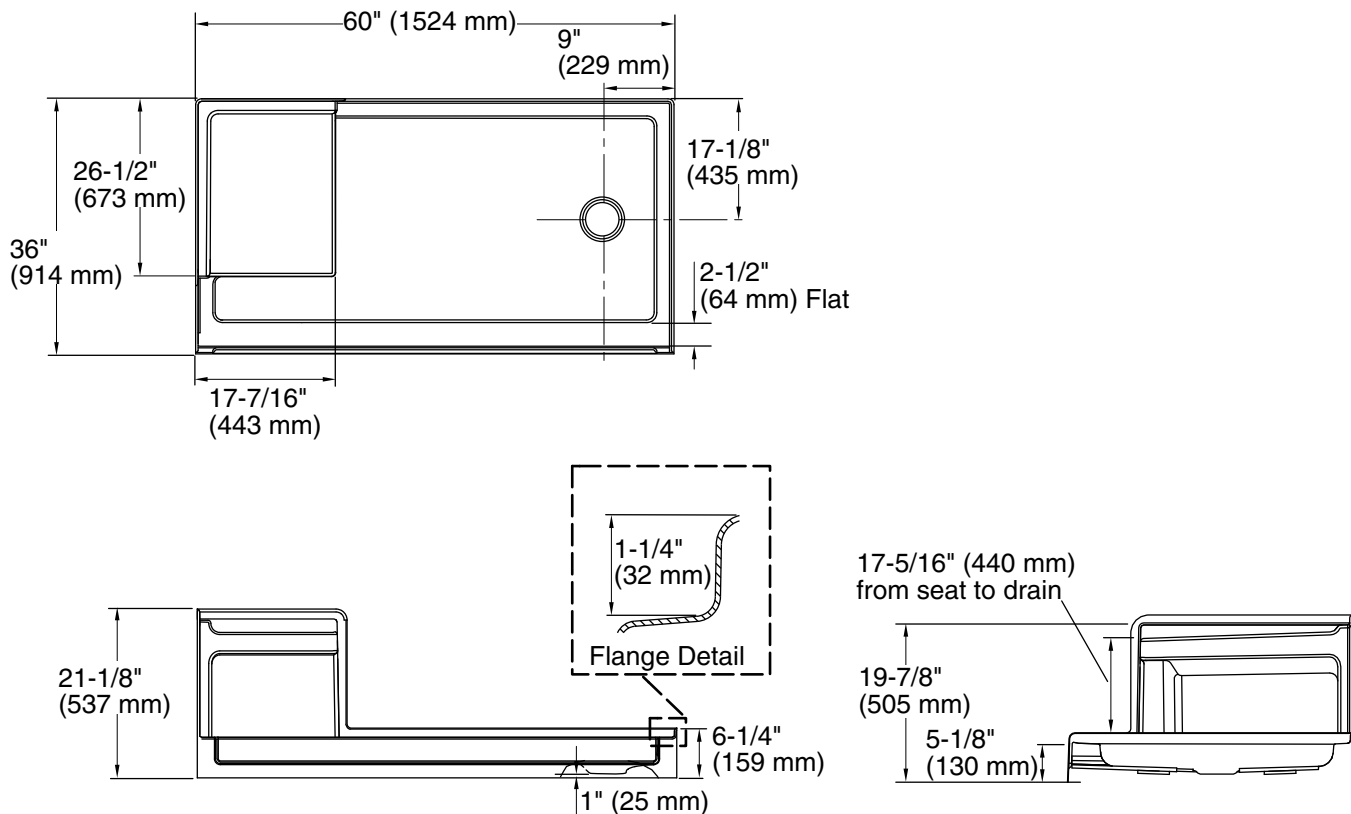

Technical Information

All product dimensions are nominal.

| | |
|------------------------|--|
| Drain location: | Right |
| Weight: | 79.5 lbs (36.1 kg) |
| Minimum floor load: | 20 lbs/ft ² (97.6 kg/m ²) |
| Minimum flat for door: | 2-1/2" (64 mm) |

Notes

Measure your actual product for rough-in details.

Install this product according to the installation instructions.

Shimming may be required between the stud frame and the fixture.

Stud opening tolerance is +1/4" (6 mm), -0" (0 mm).

KOHLER steam generator/control kit are designed for use with this product. Kohler Co. shall not be responsible for problems encountered due to the installation and use of other manufacturer's steam generators.