

Product data sheet

Specifications



Fixing base, Harmony XVB, for modular tower lights, plastic, 70mm, 80mm aluminium support tube + black fixing plate

XVBZ02A

! Discontinued

! Discontinued on: Jun 30, 2025

Product availability: Stock - Normally stocked in distribution facility

Important message: XVB is being substituted by XVB7 as complete range; XVB and XVB7 modules are not interoperable with one another.

Main

Range of Product	Harmony XVB
Accessory / separate part designation	Fixing base
Product or Component Type	Fixing base
Accessory / separate part category	Mounting and fixing accessories
Accessory / separate part destination	Beacons and indicator banks Ø 70 mm

Complementary

Accessory / Separate Part Type	Fixing base
Product Compatibility	XVBL. XVBC.
Kit composition	Ø 25 mm aluminium support tube Black plastic fixing plate
Height under base unit	3.1 in (80 mm)
Color	Aluminum
Product Weight	0.24 lb(US) (0.11 kg)

Ordering and shipping details

Category	US100XV22616
Discount Schedule	00XV
GTIN	3389110673524
Returnability	Yes
Country of origin	CZ

Packing Units

Unit Type of Package 1	PCE
Nbr. of units in pkg.	1
Package 1 Height	2.756 in (7.000 cm)
Package 1 Width	2.756 in (7.000 cm)

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

Package 1 Length	5.118 in (13.000 cm)
Package weight(Lbs)	3.034 oz (86.000 g)
Unit Type of Package 2	S04
Number of Units in Package 2	100
Package 2 Height	11.811 in (30.000 cm)
Package 2 Width	15.748 in (40.000 cm)
Package 2 Length	23.622 in (60.000 cm)
Package 2 Weight	20.607 lb(US) (9.347 kg)

Contractual warranty

Warranty (in months)	18
----------------------	----



Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)



Environmental footprint

Total lifecycle Carbon footprint	1 kg CO2 eq.
Carbon footprint of the manufacturing phase [A1 to A3]	0.9 kg CO2 eq.
Carbon footprint of the distribution phase [A4]	0 kg CO2 eq.
Carbon footprint of the installation phase [A5]	0 kg CO2 eq.
Carbon footprint of the use phase [B2, B3, B4, B6]	0 kg CO2 eq.
Carbon footprint of the end-of-life phase [C1 to C4]	0.2 kg CO2 eq.
Environmental Disclosure	Product Environmental Profile

Use Better



Materials and Substances

Packaging made with recycled cardboard	Yes
Packaging without single use plastic	Yes
SCIP Number	124e2d7a-5b1e-45ca-b93c-220dd91b55b6
EU RoHS Directive	Compliant By Exemption
REACH Regulation	Reference contains Substances of Very High Concern above the threshold
California proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov

Use Longer



Lifetime extension

Repair	No
--------	----

Use Again




Repack and remanufacture

Recyclability potential, in %	9
Circularity Profile	No need of specific recycling operations
Take-back	No

Dimensions Drawings


Dimensions and Mounting

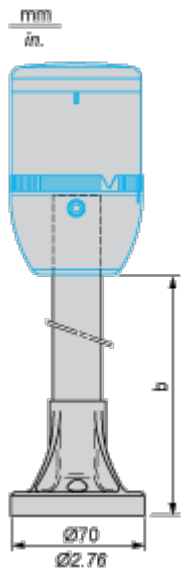

Height under base unit	
b in mm	b in in.
80	3.15


Mounting and Clearance

Panel Cut-Out



Technical Illustration


Dimensions

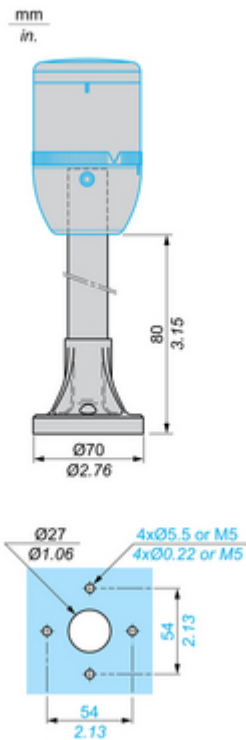

Offer Marketing Illustration

Product benefits / Features

Technical Benefits
Harmony XVB

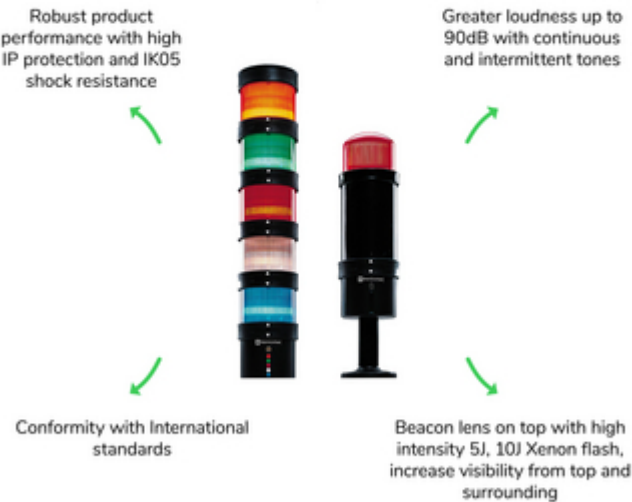

Offer Marketing Illustration

Product benefits / Features

Features

Harmony XVB



3 types of light source:
10-Watt incandescent bulb,
built-in high-efficiency
LEDs, 5 and 10-joule
discharge tube



100,000 hours of
maintenance-free lighting
thanks to "LED Protected"
technology



Connector with
removable base, axial,
or side cable entry,
immediate assembly, and
fixing using a locking ring



High degree of protection
(IP66) and Shock
resistance (IK05)





Fully flexible and interchangeable
construction of up to 5 lens units
(six colors of light lens unit)

Image of product / Alternate images

Alternative





