



GE APPLIANCES

VARIABLE REFRIGERANT FLOW HEAT PUMP SYSTEM INDOOR UNIT

MWAX054NE2AA

54K
BTH/h

SUBMITTAL

Job Name:

Approval:

Purchaser:

Date:

Submitted To:

Submitted By:


Construction:

Unit:

Reference:

Drawing #:

MULTI-POSITION AIR HANDLER

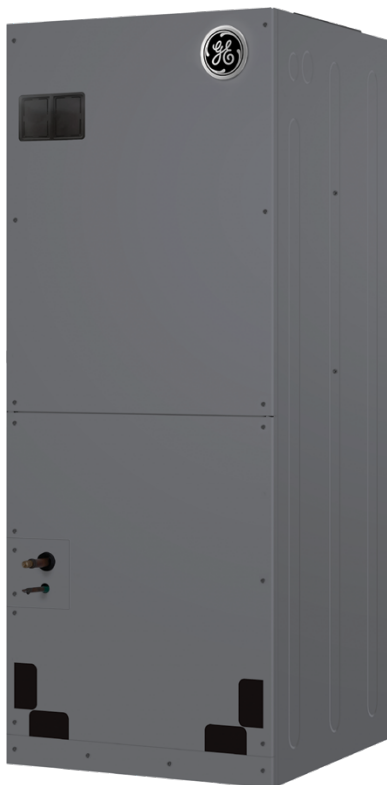

Specifications

ODU	Marketing Model Name	MWAX054NE2AA
	Nominal Capacity (Btu/h)	54,000
	Dimension: H x W x D (in.)	57 x 24 3/4 x 21
	Net Weight (lbs)	192
	Sound Level (dBA)	76/74/72/69/67
	Heating Capacity (Btu/h)	60,000
Electrical	Voltage (V / Ø / Hz)	208-230/1/60
	Minimum Circuit Ampacity (MCA)	6.9
	Maximum Overcurrent Protection	15
	Running Current, Cooling	4.5
	Running Current, Heating	4.5
Fan	Type	Forward Curved Fan
	Motor Type	DC
	Motor Output	735 W
	Number of Speeds	3
	Airflow Rate, CFM (H/M/L)	1800/1588/1258
	Airflow Rate, m ³ /h (H/M/L)	3060/2700/2140
	Ext. Static Pressure Max	0.9"
Refrigerant and Piping	Refrigerant Type/Charge (oz.)	R32 / -
	Liquid Pipe O.D. (in)	3/8
	Gas Pipe O.D. (in)	5/8

For more information visit us:

GEAppliancesAirAndWater.com

©Copyright 2026 GE Appliances, a Haier Company. GE is a trademark of the General Electric Company. Manufactured under trademark license. GE Appliances has a policy of continuous improvement of its products and reserves the right to change materials and specifications without notice.




GE APPLIANCES
a Haier company

AIR&WATER
SOLUTIONS

Dimensions (unit: in.)

Return Air Opening (Inlet)
Supply Air Opening (Outlet)

23 3/4*11 2/3 inch
17 7/8*16 1/3 inch

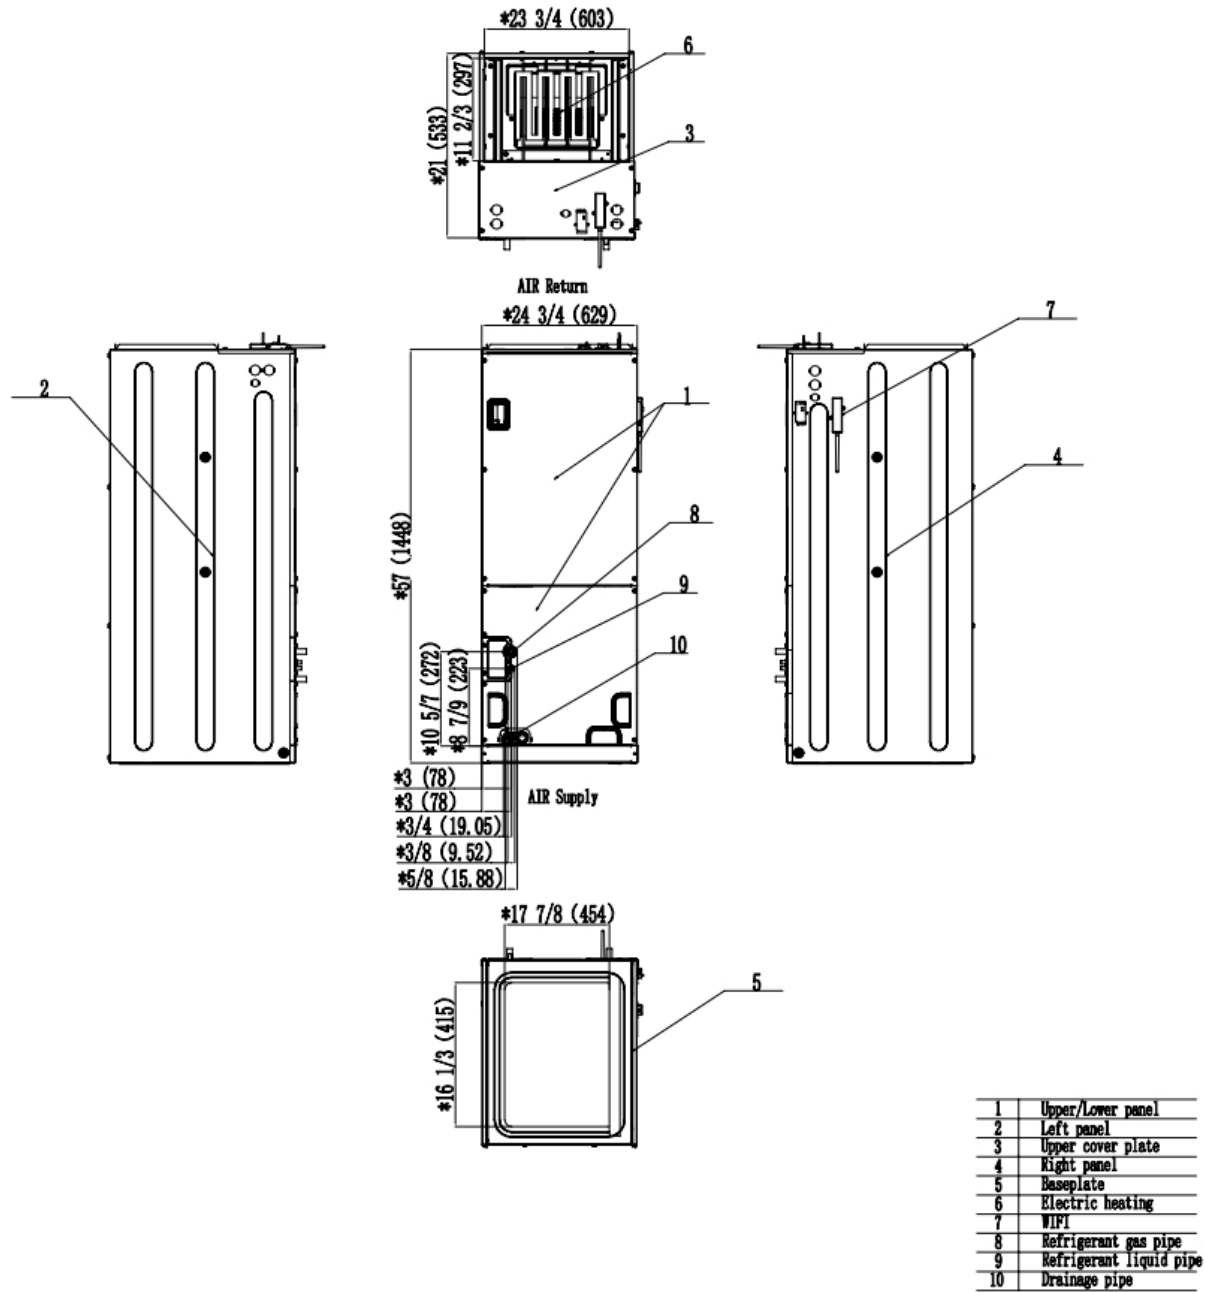

SUBMITTAL REVISION HISTORY

05-08-26: Submittal release.
08-20-26: Specification update (Ext. Static Pressure Max).