



GE APPLIANCES

VARIABLE REFRIGERANT FLOW HEAT PUMP SYSTEM INDOOR UNIT

MWAX036NE2AA

36K
BTH/h

SUBMITTAL

Job Name:

Approval:

Purchaser:

Date:

Submitted To:

Submitted By:


Construction:

Unit:

Reference:

Drawing #:

MULTI-POSITION AIR HANDLER

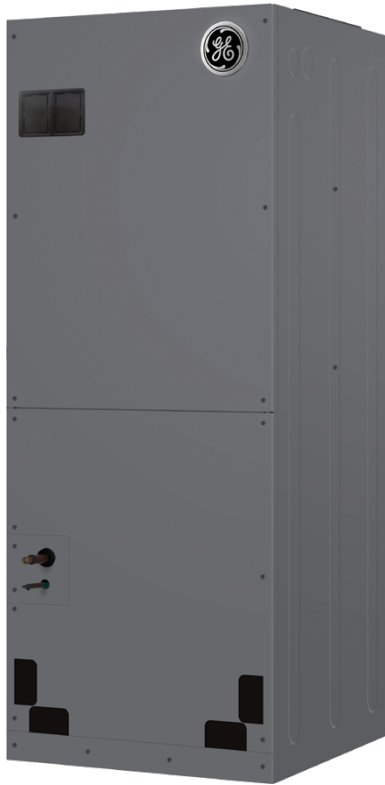

Specifications

ODU	Marketing Model Name	MWAX036NE2AA
	Nominal Capacity (Btu/h)	36,000
	Dimension: H x W x D (in.)	47 x 17 1/2 x 21
	Net Weight (lbs)	133
	Sound Level (dBA)	74/72/70/68/67
	Heating Capacity (Btu/h)	40,000
Electrical	Voltage (V / Ø / Hz)	208-230/1/60
	Minimum Circuit Ampacity (MCA)	4.4
	Maximum Overcurrent Protection	15
	Running Current, Cooling	3.47
	Running Current, Heating	3.47
Fan	Type	Forward Curved Fan
	Motor Type	DC
	Motor Output	550 W
	Number of Speeds	3
	Airflow Rate, CFM (H/M/L)	1200/1012/790
	Airflow Rate, m ³ /h (H/M/L)	2040/1720/1345
	Ext. Static Pressure Max	0.9"
Refrigerant and Piping	Refrigerant Type/Charge (oz.)	R32 / -
	Liquid Pipe O.D. (in)	3/8
	Gas Pipe O.D. (in)	5/8

For more information visit us:

GEAppliancesAirAndWater.com

©Copyright 2026 GE Appliances, a Haier Company. GE is a trademark of the General Electric Company. Manufactured under trademark license. GE Appliances has a policy of continuous improvement of its products and reserves the right to change materials and specifications without notice.




GE APPLIANCES
a Haier company

AIR&WATER
SOLUTIONS

Return Air Opening (Inlet)	16 1/2*11 2/3 inch
Supply Air Opening (Outlet)	16 1/3*12 4/9 inch

Dimensions (unit: in.)

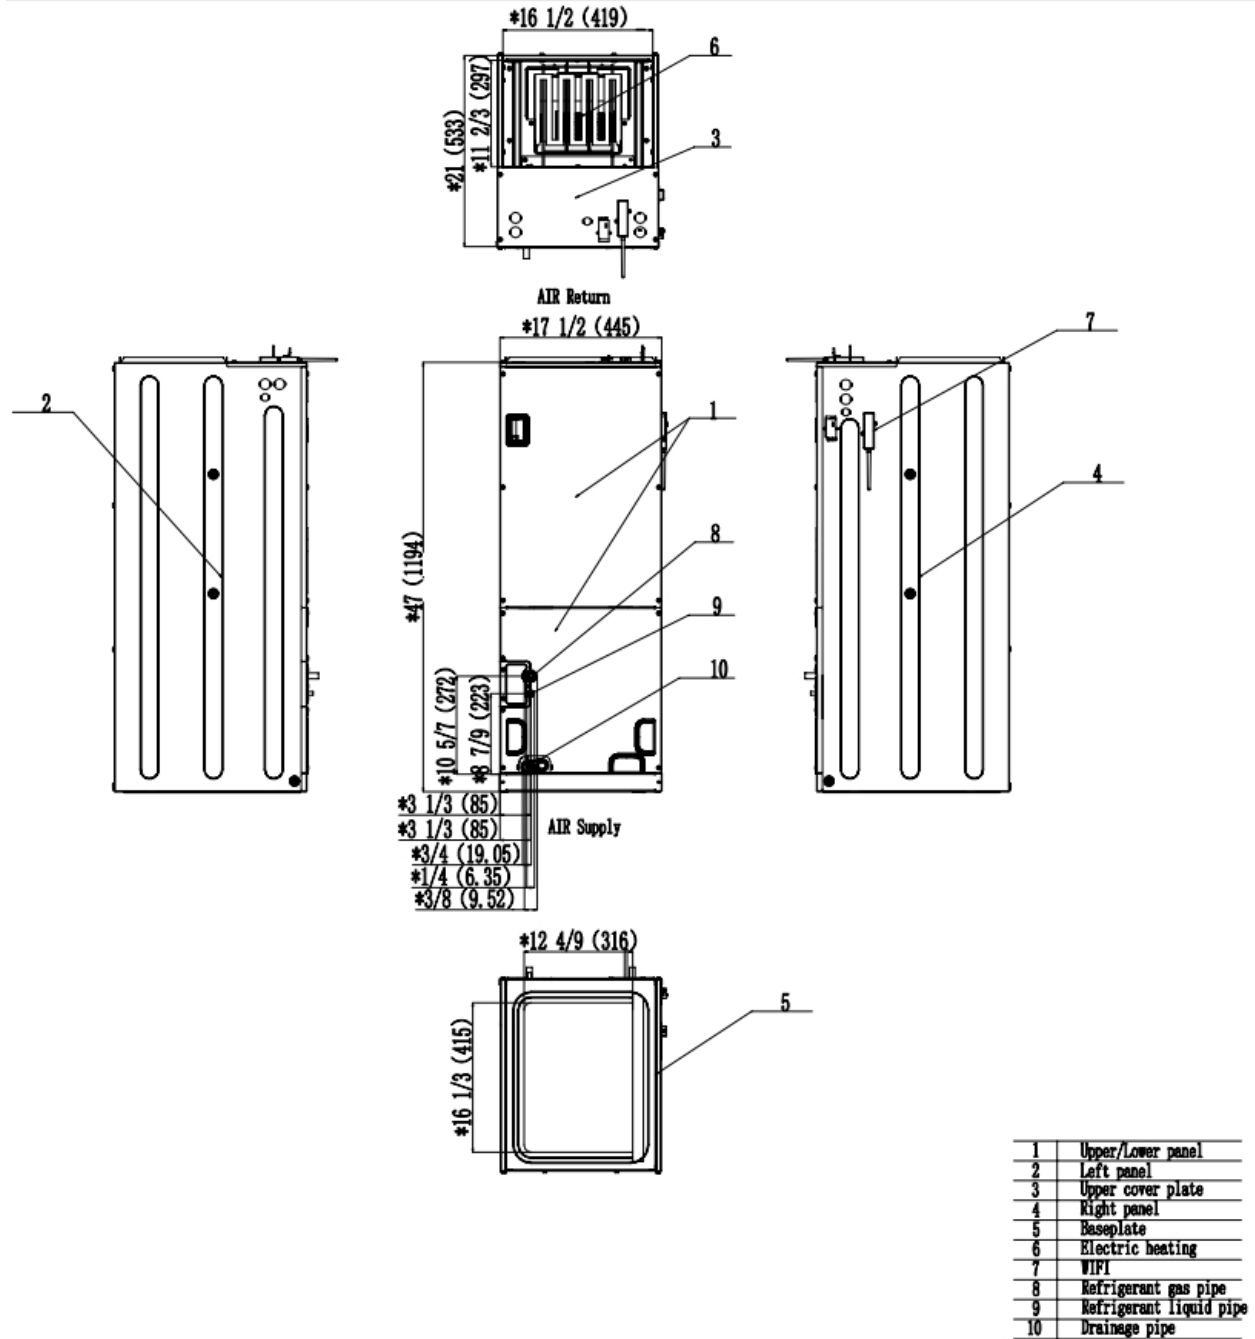

SUBMITTAL REVISION HISTORY

05-08-26:	Submittal release.
08-20-26:	Specification update (Ext. Static Pressure Max).