

AirCheck™ G2

One-Click Wi-Fi Autotest

Overview

The AirCheck™ G2 Wi-Fi Tester's intuitive user interface provides actionable intelligence, simplifying wireless troubleshooting and validation. AirCheck G2 is the most cost-effective hardware-enabled site survey solution, and provides network professionals of any skill level with complete and accurate information to validate Wi-Fi deployments and changes, resolve connectivity and performance problems quickly, speed up closure of trouble tickets, and ensure your Wi-Fi network meets end users' needs.

- AirCheck G2 offers a one-button AutoTest function that quickly provides a pass/fail indication of Wi-Fi network quality and identifies common problems
- Faster and easier Wi-Fi site surveys with AirMapper™ Site Survey
- Test the most common Wi-Fi standards (including 802.11ax) with a rugged, handheld, purpose-built wireless tester
- See all networks and devices in your location immediately upon power up
- View test results, including network availability, connectivity, utilization, throughput, security settings, possible rogues, and interferers
- Automate reporting and enable collaboration with result upload and management via Link-Live Cloud Service

Now with AirMapper™ Site Survey App




Key Features


AutoTest

AirCheck G2 performs the following five essential Wi-Fi tests and provides a pass/fail indication of the wireless environment, as well as identifies common problems — for any level of expertise:

- **802.11 Utilization** – Reports channels in each band (2.4 GHz and 5 GHz) with the highest airtime utilization.
- **Non-802.11 Utilization** – Reports channels with the highest non-802.11 airtime utilization, indicative of interference sources and high noise levels.
- **Co-Channel Interference** - Reports channels with the most APs on the same channel that exceed the minimum signal level threshold.
- **Adjacent Channel Interference** - Reports interference on a channel caused by APs that are operating on other channels that overlap with that channel.
- **Network Quality** – Verifies coverage, interference, security and ability to connect to specified networks, along with the availability of critical network services such as DHCP and connectivity to specified network targets.
- **Rogue Access Points** - Reports APs other than your authorized devices. These devices may be compromising network security.

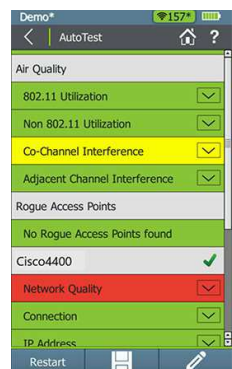

Basic AutoTest Results

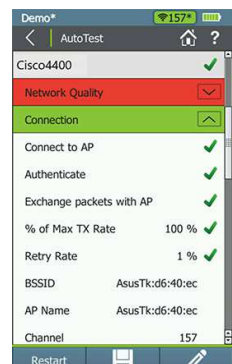

Detailed AutoTest Results



AirMapper™ Site Survey App

AirMapper™ Site Survey App

With the AirMapper app, AirCheck G2 users can quickly and easily gather location-based Wi-Fi measurements and create visual heat maps of key performance metrics in the Link-Live Cloud Service or AirMagnet Survey PRO. Simple to use, the AirMapper app is ideal for quick site surveys of new deployments, change validation, and performance verification.

- Complete faster and easier Wi-Fi site surveys with an entirely mobile platform
- Perform enterprise-grade surveys without the need of a dongle or tethered device
- Collaborate—easily visualize and share survey data through Link-Live Cloud Service or AirMagnet Survey PRO
- Active Survey tests the actual experience that a client device would encounter, including how effective roaming is working in the environment

Access Point Discovery

Quickly view all the APs present in the environment and see critical parameters for each one, including signal level, signal/noise ratio, security type, and channel. Find common issues, such as incorrect security type, poor signal coverage, or incorrect channel. (Figure 3)

Sort or filter by any parameter, then drill into any AP to set its authorization level and see more details, including number of connected clients, supported rates, 802.11n/ac/ax capabilities and more. From the AP details page, drill into a list of connected clients, or the channel on which the AP operates, to verify any channel utilization or co-channel interference problems.

From here you can also use a locator tool to find an AP, set Access Control status (ACL), or you can perform a packet capture.

Sort: Signal Strength	Filter
AsusTkd6:40:ec	-33 SNR: 60 dB Channel: 157
CompeX:14:62:2f	-37 SNR: 54 dB Channel: 1
AsusTkd6:40:e8	-56 SNR: 36 dB Channel: 1
Apple:fc:42:13	-70 SNR: 22 dB Channel: 1
e0:22:03:74:86:4e	-72 SNR: 19 dB Channel: 10
f6:fe:07:ee:57:08	-75 SNR: 16 dB Channel: 1
e6:fe:07:ee:57:08	-77 SNR: 14 dB Channel: 1
Pegatn:ee:57:08	

Access Point List

Network Discovery

Quickly view all the networks present in the environment and see critical parameters for each one, including signal level, signal/noise ratio, security type, and number of access points. Find common issues such as mixed security types, poor signal coverage, or lack of secondary AP coverage.

Sort or filter by any parameter, then drill into greater detail on any network, including 802.11 types supported, number of connected clients, channels, and more. From the network details page, drill into a list of APs or clients on the network.

Sort: Signal Strength	Filter
Alpha24	-92 SNR: 52 dB
CRIS24	-36 SNR: 48 dB
EAG500_TAC_24g	-38 SNR: 46 dB
TAC-WPA2-Test	-38 SNR: 46 dB
[Hidden - Lnksys:92:a9:d9]	-38 SNR: 46 dB
EAG500_TAC_5g	-42 SNR: 48 dB
Snackers_CO_2.4G	-46 SNR: 38 dB
snackers-DJMcD	

Network List

Wired Ethernet Tests

The AirCheck G2's built-in Ethernet test validates that APs have a working back haul connection to the network.

- Diagnose and test Power-over-Ethernet (PoE), link to the switch, DHCP, Gateway, and Internet connections.
- Get VLAN, switch name, and port information via CDP/LLDP/EDP for your managed switches.

Ethernet Test	
PoE	Found, 50.2 Volts
Link	1000 Mbps/FDx
Port	COS_DEV_SW1.fnet.eng
DHCP	10.250.3.24
Default Gateway	10.250.0.1
Network	www.google.com
Upload Results to Link-Live	

Ethernet Test Results



NOTE: Enhanced site survey visualizations and filtering are available to customers with AllyCare support on their AirCheck G2. For information about AllyCare, go to support.netally.com/allycare/

Channel Utilization and Interference

Quickly determine if channels are over-utilized with Wi-Fi traffic and/or with non-Wi-Fi interference and noise. You can also gain visibility on the level of Wi-Fi traffic and interference over the last 60 seconds on a selected channel, as well as, the access points, clients, and interferers using this channel. Drill into details and detect devices that can cause interference, such as, microwave ovens, wireless game controllers, Bluetooth® devices, Zigbee devices, and wireless video camera.

Rogue Detection/Location, Client Details

The AirCheck G2 provides client Details conveying essential information about specific devices and their configuration. Track down rogue APs and unauthorized clients by following the real-time signal level meter and graph over time. Audible indication is provided, and the use of a USB headset for private audio is supported. The AirCheck G2 also supports the option of using an external directional antenna to save significant time when locating devices.


Network Connections Test

Verify network availability and access to critical services by connecting to a network (SSID) or AP with a single touch on the Connect button.


Key test steps include:

- Associate with AP
- Request and receive an IP address from a DHCP server
- Ping the default gateway and DNS servers for availability
- Perform a ping or TCP port test on up to ten network targets
- Conduct ongoing signal level, signal/noise ratio, and retry rate measurements


Once connected to a network, perform a roaming test to validate that roaming is enabled on the network, or run an iPerf performance test to verify throughput capabilities on the network.




Channels Overview




Client Details In-depth



Roaming Test Results



Performance Results
after an iPerf Test



Wireless Connection
Results

Premium Customer Services



AllyCare is a comprehensive support and maintenance service for NetAlly's Network Tools and AirMagnet® software that offers significant value over standard warranty. Membership of AllyCare can be purchased as either a 1-year membership or the value-added 3-year membership rate.

support.netally.com



Automated Test Results Management


Serving as a centralized test results and device management system, the free Link-Live Cloud Service transforms team workflows with the ability to quickly and easily log, document, and report test activity from all LinkSprinter®, LinkRunner AT, LinkRunner G2, LinkRunner 10G, AirCheck™ G2 handheld network testers.

Once the instrument is connected to the Link-Live Cloud service, your test results are automatically uploaded to the dashboard for project management and reporting. You have the option of uploading additional files, screenshots, images, profiles, packet captures, location information, and comments anytime. Also, certain NetAlly instruments with AllyCare Support can receive firmware updates “over the network” from Link-Live as they become available.

An API is available to retrieve and integrate data from Link-Live into other management platforms, such as your trouble-ticket application or network management system. This gives you the ability to easily provide proof-of-performance and better manage jobs and staff efficiency.

This unified dashboard of both wired and Wi-Fi network connectivity results enables you to:

- Reduce results management overhead for multiple testers and users
- Enables seamless collaboration between site personnel and remote experts
- Attach photos, user comments to each result, adding context for future changes and troubleshooting
- For asset management, ability to associate serial numbers of installed devices, and/or cable/walljack label to specific test results

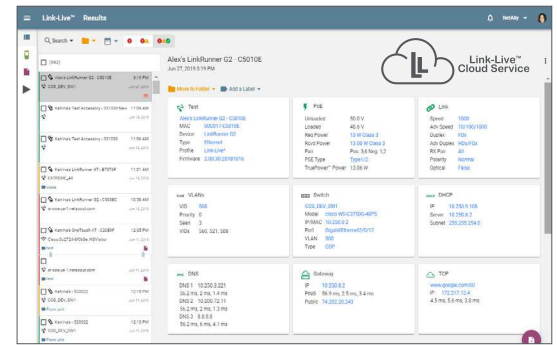

Simplify report generation across media types for network deployment documentation

Ordering Guide

Model Number/Name	Description
AIRCHECK G2	Includes: (1) AirCheck G2, small soft carrying case, AC charger, USB cable, and <i>Quick Start Guide</i> .
AIRCHECK-G2-KIT	Includes: (1) AirCheck G2, small soft carrying case, AC charger, USB cable, <i>Quick Start Guide</i> , external directional antenna, holster, and automobile power charger.
AIRCHECKG2-TA-KT	Includes: (1) AirCheck G2, small soft carrying case, AC charger, USB cable, <i>Quick Start Guide</i> , external directional antenna, holster, automobile power charger, and (1) Test Accessory.
LR-G2-ACKG2-CBO	Includes (1) LinkRunner G2 with Li-ION battery, (2) power supplies with regional power plugs, automobile power charger, WireView Cable ID #1-#6, Inline RJ-45 coupler, (2) USB 2.0 to Micro USB cable, 8G Micro SD card, (2) holsters, accessory pouch, (1) AirCheck G2 Wi-Fi Tester, (1) Test Accessory, <i>Quick Start Guides</i> , external directional antenna, and soft carrying cases (small, medium, large).
ACKG2-LRAT2000	Includes: (1) AirCheck G2, AC charger, USB cable, <i>Quick Start guides</i> , external directional antenna, holster, automobile charger, (1) LinkRunner AT 2000 tester with Li-ION battery, AC charger, WireView cable ID #1-#6, large folding test kit pouch, holster, Inline RJ-45 coupler, USB cable, and (2) small cases.

Support

Model Number/Name	Description
AIRCHECK-G2-1YS	1 year AllyCare Support for AIRCHECK-G2
AIRCHECK-G2-3YS	3 year AllyCare Support for AIRCHECK-G2
AIRCHECK-G2-1YS + LRAT-2000-1YS	1 year AllyCare Support for ACKG2-LRAT2000
AIRCHECK-G2-3YS + LRAT-2000-3YS	3 year AllyCare Support for ACKG2-LRAT2000

Accessories

Model Number/Name	Description
LION-REPL-BA	Replacement battery for ACKG2
TEST-ACC	(1) Test Accessory for use with AirCheck G2, LinkRunner G2 or OneTouch AT. It can act as an independent iPerf server.
TEST-ACC-5PK	(5) Test Accessories for use with AirCheck G2, LinkRunner G2 or OneTouch AT. They can act as an independent iPerf server.
TEST-ACC-10PK	(10) Test Accessories for use with AirCheck G2, LinkRunner G2 or OneTouch AT. They can act as an independent iPerf server.
G2-HOLSTER	Protective carrying holster with shoulder strap for Aircheck G2 or LinkRunner G2.
SM SOFT CASE	Small soft case
EXT-ANT	External directional antenna
PWR-CHARGER	AC charger replacement

Specifications

General	
Dimensions	3.8 in x 7.7 in x 1.6 in (9.7 cm x 19.6 cm x 4.1 cm)
Weight	18 oz (0.51 kg)
Battery	Rechargeable lithium-ion battery pack (3.6 V, 6 Ah, 21 Wh)
Battery life	Typical operating life is 4.5 hours. Typical charge time is 7 hours.
External AC adapter/charger	AC input 85-264V AC 47-63 Hz input power DC output 15 V DC at 2 Amps
Display	5.0 in color LCD with capacitive touch screen (480 x 800 pixels)
Keypad	1-key elastomeric (power only)
Host interface	1x micro USB Type B port
Adjunct interface	2x USB 2.0 Type A port
Wireless antenna	3x Internal
External antenna port	Input only. Reverse-polarity SMA connector.
Environmental	
Operating temperature	32°F to 113°F (0°C to +45°C)
	NOTE: The battery will not charge if the internal temperature of the tester is above 122°F (50°C).
Operating relative humidity (% RH without condensation)	90% (50°F to 95°F; 10°C to 35°C)
	75% (95°F to 113°F; 35°C to 45°C)
Storage temperature	-4°F to 140°F (-20°C to +60°C)
Shock and vibration	1 m drop test, Random, 3.8 grms, 5 Hz-500 Hz (Class 2)
Safety	IEC 61010-1: Pollution degree 2
Altitude	4,000 m; Storage: 12,000 m
EMC	IEC 61326-1: Basic Electromagnetic Environment; CISPR 11: Group 1, Class A



Specifications *continued*

Wireless	
Specification compliance	IEEE 802.11a, 802.11b, 802.11g, 802.11n, 802.11ac, 802.11ax Note: The tester provides 802.11ax visibility using an 802.11ac radio.
Wi-Fi Connectivity	802.11a, 802.11b, 802.11g, 802.11n, 802.11ac, 802.11ax Note: The tester connects to 802.11ax networks using an 802.11ac radio.
Operating frequencies NOTE: These are the center frequencies of the channels that the AirCheck G2 tester supports.	<p>Frequencies of channels received: (<i>NOTE: The tester receives on all the frequencies in every country.</i>)</p> <p>2.4 GHz band: 2.412 – 2.484 GHz (channel 1 to channel 14)</p> <p>5 GHz band: 5.170 – 5.320 GHz, 5.500 – 5.700 GHz, 5.745 – 5.825 GHz (channels 34, 36, 38, 40, 42, 44, 46, 48, 52, 56, 60, 100, 104, 108, 112, 116, 120, 124, 128, 132, 136, 140, 149, 153, 157, 161, 165)</p> <p>Frequencies of channels transmitted: <i>NOTE: The tester transmits only on the frequencies allowed in the country where it is operating.</i></p> <p>2.4 GHz band</p> <p>802.11b: 2.412 – 2.484 GHz (channel 1 to channel 14)</p> <p>802.11g/n 20 MHz BW (HT20): 2.412 – 2.472 GHz (channel 1 to channel 13)</p> <p>802.11n 40 MHz BW (HT40): 2.422 – 2.462 GHz (includes all combinations of legal, bonded pairs of channels)</p> <p>5 GHz band</p> <p>802.11a/n 20 MHz BW (HT20): 5.180 – 5.320 GHz, 5.500 – 5.700 GHz, 5.745 – 5.825 GHz (channels 36, 40, 44, 48, 52, 56, 60, 64, 100, 104, 108, 112, 116, 120, 124, 128, 132, 136, 140, 144, 149, 153, 157, 161, 165)</p> <p>802.11n 40 MHz BW (HT40/VHT40): 5.190 – 5.310 GHz, 5.510 – 5.670 GHz, 5.755 – 5.795 GHz (includes all combinations of legal, bonded pairs of channels)</p> <p>802.11ac 80 MHz BW (VHT80): 5.210 – 5.290 GHz, 5.530 – 5.690 GHz, 5.775 GHz (includes all combinations of legal, bonded pairs of channels)</p>
Antennas	
Internal Wi-Fi antennas	Three internal 2.4 GHz, 1.1 dBi peak, 5 GHz, 3.2 dBi peak antennas.
External directional antenna	Antenna, frequency range 2.4 - 2.5 and 4.9 - 5.9 GHz. Minimum gain 5.0 dBi peak in the 2.4 GHz band, and 7.0 dBi peak in the 5 GHz band.
AirCheck G2 Manager Software	
Supported Operating Systems	Windows® 8.1, Windows® 10
Processor	400 MHz Pentium processor or equivalent (minimum); 1 GHz Pentium processor or equivalent (recommended) RAM 96 MB (minimum)
RAM	256 MB (minimum); 512 MB (recommended)
Hard disk	Up to 500 MB of available space may be required
Display	1280 x 1024 high color, 32-bit (recommended)
Hardware	USB Port
Certifications and Compliance	
	Conforms to relevant European Union directives
	Conforms to relevant Australian Safety and EMC standards.
	Certified by CSA Group to North American safety standards.
	Complies with 47 CFR Part 15 requirements of the U.S. Federal Communications Commission.
	Certified by the National Agency of Telecommunications (Anatel).
	Conforms to relevant South Korean EMC Standards.

Additional South Korean EMC Standards Information

Electromagnetic Compatibility. Applies to use in Korea only. Class A Equipment (Industrial Broadcasting & Communications Equipment)^[1]

^[1] This product meets requirements for industrial (Class A) electromagnetic wave equipment and the seller or user should take notice of it. This equipment is intended for use in business environments and is not to be used in homes.

©2021 NetAlly, LLC. Third-party trademarks mentioned are the property of their respective owners.