





Location:

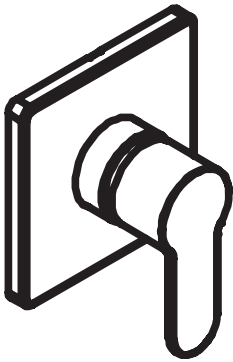

1026DIVTRM
Diverter Trim
Installation Guide


| Model Number | Specification |
|---|--|
| <input type="checkbox"/> 1026DIVTRM Diverter Trim | Shower trim includes 1 mode shower head and 1.75 gpm (6.6 L/min) flow restrictor. Components made from metal and nonmetallic materials, plated in standard brushed matte brass finish. |
| Warranty | Compliance |
| <p>Limited Lifetime - to the original end purchaser in consumer/residential installations.</p> <p>10 Years - for commercial/industrial installations. Refer to www.symmons.com/warranty for complete warranty information.</p>  | <ul style="list-style-type: none">ASME A112.18.1/CSA B125.1  |
| Dimensions | |

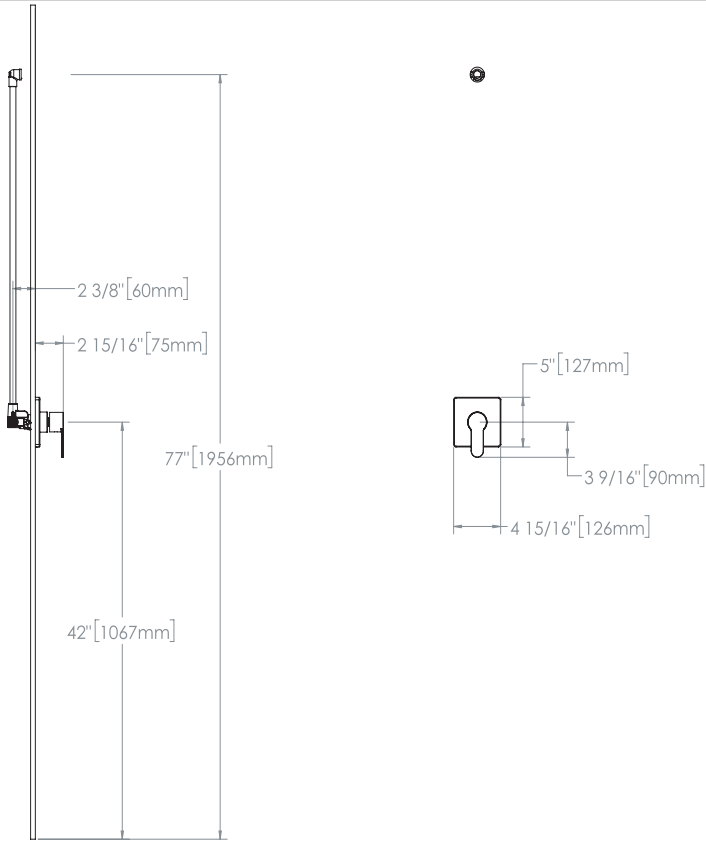





Valves, piping and finished wall shown for reference only

Note: Dimensions subject to change without notice.

Parts Breakdown

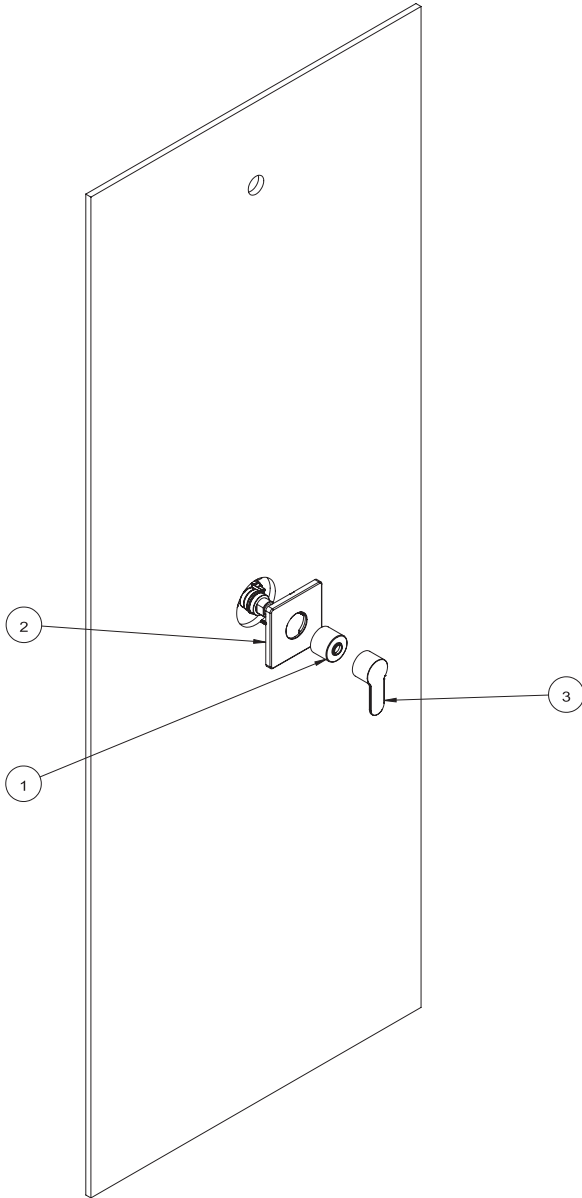

| Replacement Parts | | |
|-------------------|-------------|--------------|
| Item | Description | Part Number |
| 1 | Dome | T-19 |
| 2 | Escutcheon | T-02504-K001 |
| 3 | Handle | T-03668 |

| Tools Required for Installation | |
|---------------------------------|---|
| Allen Wrench 2.5 mm |  |
| Phillips Head Screwdriver |  |
| Plumber Tape |  |
| Silicone |  |

Notes:

- 1) Apply a bead of silicone around the perimeter of all shower trim installed flush to the finished wall (less mounting plates and brackets). Leave opening on bottom of escutcheons for weep hole.
- 2) Apply plumber tape to all threaded connections.