













## SEVILLE 5 LIGHT SHADE CHANDELIER


3320205

### General Product Information

 <p>ETL LISTED Intertek</p>	 <p>SAVE THESE INSTRUCTIONS!</p>	 <p>STANDARD INSTALLATION</p>	 <p>INDOOR</p>
 <p>TITLE 24 COMPLIANT</p>	 <p>NEC COMPLIANT JUNCTION BOX</p>	 <p>DAMP LOCATION SAFE</p>	 <p>CONVERTS TO LED</p>
 <p>PLEASE SEE <a href="http://visualcomfort.com">visualcomfort.com</a> FOR PRODUCT SPECS</p>	 <p>CLEAN WITH SOFT, DRY CLOTH ONLY, NO HARSH CHEMICALS!</p>	 <p>BEST PRACTICE: HANDLE FIXTURE WITH GLOVES</p>	




WARRANTY



FCC STATEMENT

### Tools Required




PHILLIPS-HEAD SCREWDRIVER

### Safety Information

**CAUTION-RISK OF FIRE**

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.


**USE MINIMUM 90°C SUPPLY CONDUCTORS.**



Turn off electrical current at the source before working with any lighting fixture or portable lamp.

Install and use this product in adherence with local electrical codes and regulations.



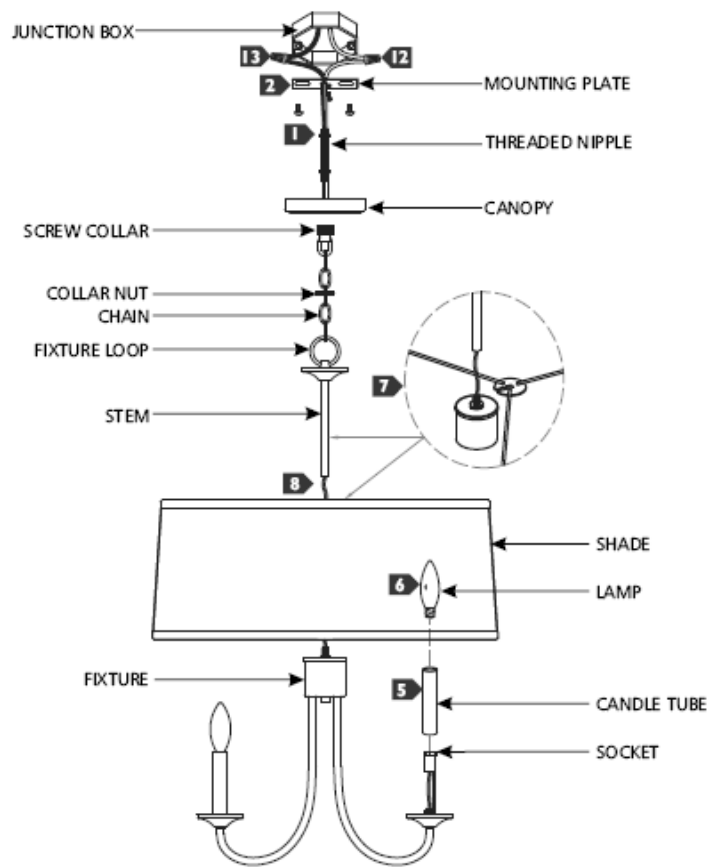

## INSTRUCTIONS

### I. Preparing the Fixture

1. Screw the shorter end of the threaded nipple tightly onto the mounting plate.
2. Secure the mounting plate to the junction box.
3. Temporarily unscrew and remove the collar nut and screw the screw collar tightly onto the threaded nipple.
4. Determine the wanted height of the fixture and remove a portion of the chain by opening a link and removing it from the bottom.
5. Slide the candle tubes over the sockets.
6. Screw the lamps into the sockets. Refer to the label on the socket for Max Wattage Information.
7. Place the shade on top of the fixture.
8. Feed the fixture wires through the fixture loop and stem, then screw it onto the fixture.
9. Install the canopy and the collar nut onto the chain in that order, then install the open link onto the fixture loop and secure it in place by closing the link.
10. Weave the cord through the chain, screw collar, canopy, threaded nipple, and out of the junction box. Trim the cord, leaving enough length to make electrical connections.

### II. Wiring the Fixture

1. Safety first! Locate the circuit breaker and switch it off to cut off the power supply to the relevant circuits to ensure there's no electricity running through the wiring.
2. In accordance with local electrical codes, connect the fixture ground wire (bare copper or silver wire) to suitable ground. This may be a green ground screw on the mounting plate, which the ground wire should be tightly wrapped around or a house wire (green or bare copper wire without insulation).
3. Twist the bare ends of the following pairs of wires together using a wire nut to secure a connection:
  - a) White fixture wire to neutral power line wire
  - b) Black fixture wire to hot power line wire
4. Carefully tuck all the wires and wire-nut connections in the junction box, place the canopy onto the ceiling, and secure it in place by screwing the collar nut tightly onto the screw collar.