

### Features

- MasterClean™ sprayface features an easy-to-clean surface that withstands mineral buildup and maximizes spray performance
- Single-function showerhead with 48 translucent nozzles
- 5-1/2" (140 mm) diameter sprayface
- 1.75 gpm (6.6 lpm) maximum flow rate
- Complements Purist faucets and accessories

### Material

- KOHLER finishes resist corrosion and tarnishing

### Technology


- Katalyst® air-induction technology infuses water with air, creating bigger drops for a more powerful spray

### Installation

- Wall-mount
- Shower arm and flange sold separately

### Recommended Products/Accessories

K-7397 Shower Arm and Flange

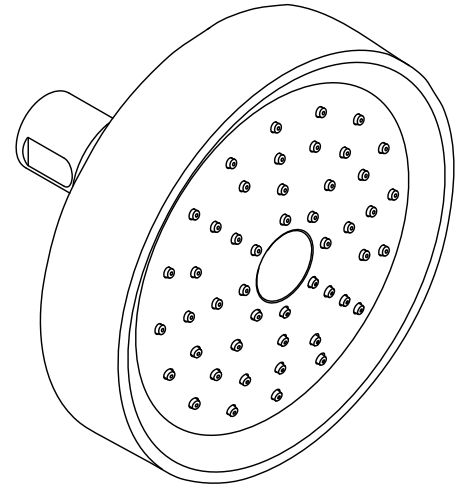

### Codes/Standards










ASME A112.18.1/CSA B125.1  
DOE - Energy Policy Act 1992  
EPA WaterSense®  
California Energy Commission (CEC)  
NOM Standards  
NOM 008-CONAGUA



### KOHLER® Faucet Lifetime Limited Warranty

See website for detailed warranty information.

### Available Colors/Finishes

*Color tiles intended for reference only.*

Color	Code	Description
	CP	Polished Chrome
	SN	Vibrant® Polished Nickel
	BN	Vibrant® Brushed Nickel
	BV	Vibrant® Brushed Bronze
	BL	Matte Black
	2MB	Vibrant® Brushed Moderne Brass
	TT	Vibrant Titanium
	BGP	Vibrant Brushed Graphite
	DR	Deep Bronze

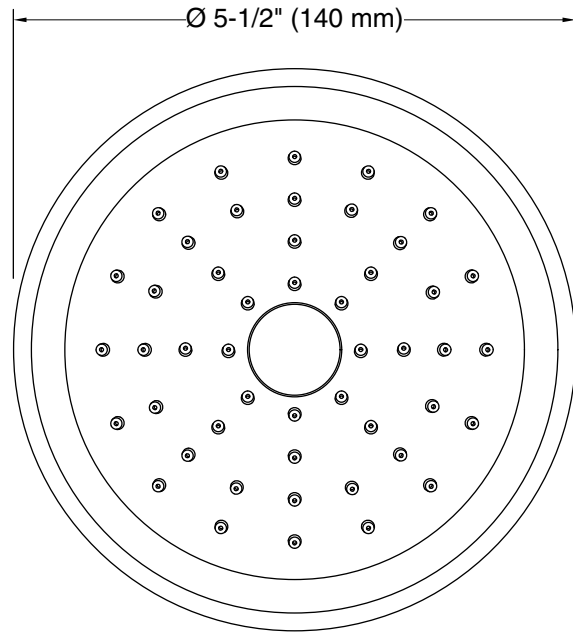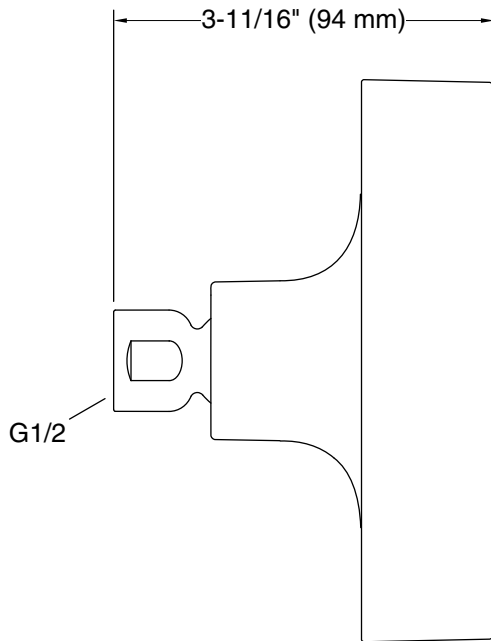

### Technical Information

All product dimensions are nominal.

### Spout:

Shower/Rainhead rated max flow: 1.75 gal/min (6.6 l/min)

### Notes

For use with automatic compensating valves rated at 1.5 gal/min (5.7 l/min) or less.

Install this product according to the installation instructions.