

Patch Cord

Features

- Third Party Verified Category 6A Component
- Plug Optimized For High Density Switch Ports
- 10-Gigabit Application Assurance
- Qualified to 150% of 802.3bt PoE Current Level



Ordering Information


| Description                  | Color | Catalog Number | UPC          |
|------------------------------|-------|----------------|--------------|
| 3 ft. Category 6A Patch Cord | Green | HC6AGN03       | 662620229652 |

Listings

ANSI/TIA/EIA-568-C.2 Category 6A component  
ISO 11801/60603-7-41 Category 6A component  
Mechanical: Verified to TIA-568-C.2  
UL Listed 1863

Specifications

|                 |                                                      |
|-----------------|------------------------------------------------------|
| Conductor       | 26AWG UTP                                            |
| Jacket          | Dual Layer Flame-Retardant PVC - CM Rated            |
| Plug Body       | Polycarbonate UL 94V-0                               |
| Plug Boot       | Polycarbonate UL 94V-0                               |
| Contact Plating | 50 micro-inch Gold with 100 micro-inch under plating |

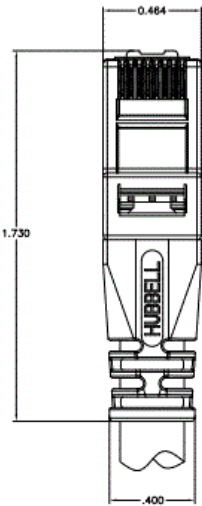

Performance

Mechanical

|                                |          |
|--------------------------------|----------|
| Cable to plug tensile strength | 20+ lbs. |
| Mating Cycles                  | 2000+    |

Applications

IEEE 802.3an 10GBASE-T  
IEEE 802.3bt 4PPoE Power over Ethernet  
IEEE 802.11ac and IEEE 802.11ax WAP Deployments  
Backward compatible with Cat 5E and 6 hardware and applications

Accessories

|                                 |        |
|---------------------------------|--------|
| Category 6A Component Jack      | HJ6AGN |
| Category 6A 24-Port Patch Panel | HP6A24 |
| Category 6A 48-Port Patch Panel | HP6A48 |

Online Resources

[eCatalog](#)